

ACCESSORY FOR 3KD SIZE 1 AND 2 AUXILIARY SWITCH, 1 CHANGE OVER WITH 50CM CONNECTING CABLES



| Model                                                                  |   |                                      |
|------------------------------------------------------------------------|---|--------------------------------------|
| product brandname                                                      |   | SETRON                               |
| Product designation                                                    |   | Accessories for switch disconnectors |
| Design of the product                                                  |   | Auxiliary switch                     |
| Auxiliary circuit                                                      |   |                                      |
| Number of CO contacts / of auxiliary contacts / instantaneous contact  |   | 1                                    |
| Number of NC contacts / for auxiliary contacts / instantaneous contact |   | 0                                    |
| Number of NO contacts / for auxiliary contacts / instantaneous contact |   | 0                                    |
| Operating current / of auxiliary contacts / at AC-15 / at 230 V        | A | 2                                    |
| Suitability                                                            |   |                                      |
| Suitability for use                                                    |   | For 3KD sizes 1 and 2                |
| Product details                                                        |   |                                      |
| Product description                                                    |   | 1 CO                                 |
| Connections                                                            |   |                                      |

|                                                                                                                                           |                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Type of electrical connection</b><br><br><ul style="list-style-type: none"> <li>• for auxiliary and control current circuit</li> </ul> | with soldered-on cable (finely stranded) 0.75mm <sup>2</sup><br>(AWG18), 50cm long<br>Soldering tag connection |
|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|

|                          |   |                                  |
|--------------------------|---|----------------------------------|
| <b>Mechanical Design</b> |   |                                  |
| <b>Mounting type</b>     |   | Can be plugged in and integrated |
| <b>Net weight</b>        | g | 24.6                             |

|                                                                                                                                              |  |          |
|----------------------------------------------------------------------------------------------------------------------------------------------|--|----------|
| <b>Certificates</b>                                                                                                                          |  |          |
| <b>Equipment marking</b><br><br><ul style="list-style-type: none"> <li>• acc. to DIN EN 61346-2</li> <li>• acc. to DIN EN 81346-2</li> </ul> |  | SF<br>SF |

|                                 |                                  |
|---------------------------------|----------------------------------|
| <b>General Product Approval</b> | <b>Declaration of Conformity</b> |
|---------------------------------|----------------------------------|



#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3KD9103-1>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3KD9103-1/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3KD9103-1](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD9103-1)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://ausschreibungstexte.siemens.com/tiplv>

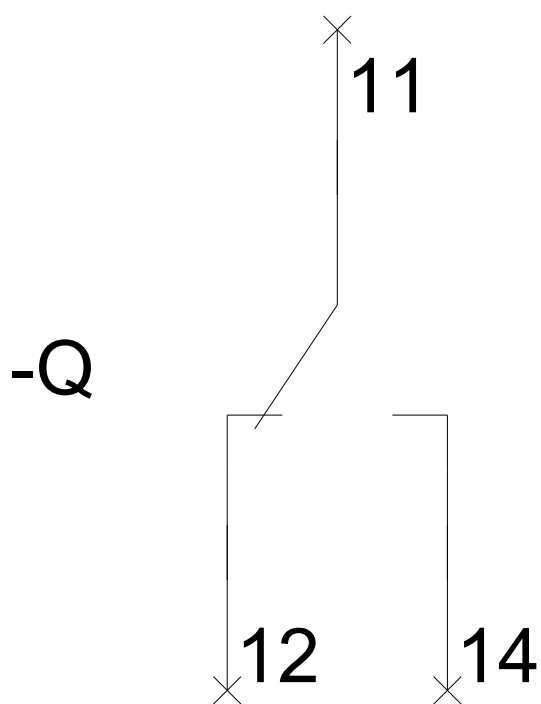

last modified:

10/14/2016