





LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 0, 63A, AC 500V/DC 440V

Similar to image

Technical data:		
Current / for AC / rated value	A	63
Operating class of the fuse link		gG
Size of the fallback-system / acc. to DIN EN 60269-1		NH0
Supply voltage		
• for AC / rated value	V	500
• for DC	V	440
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	120
• with DC / in accordance with IEC 60947-2 / rated value	kA	25
Design of an identification indicator		Front indicators
type of the assembly		Non-insulated grip lugs
Protection class IP		IP20, with connected conductors
Climatic class		-20 to +50 at 95% relative humidity
Ambient temperature		
• minimum	°C	-5
• maximum	°C	40
Product description		Using screw adapter or adapter sleeves

Certificates/approvals:

General Product Approval			Declaration of Conformity	Test Certificates	
				Special Test Certificate	Type Test Certificates/Test Report
GOST	KEMA	VDE	EG-Konf.		
other					
Environmental Confirmations					
Further information:					
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs					
Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall					
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3NA3022/all					
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3022					
CAX-Online-Generator http://www.siemens.com/cax					
Tender specifications Datanorm GAEB81 GAEB83 RTF TXT					

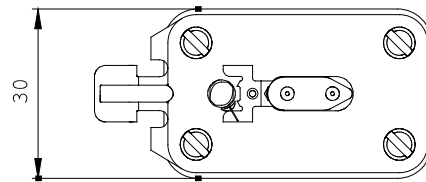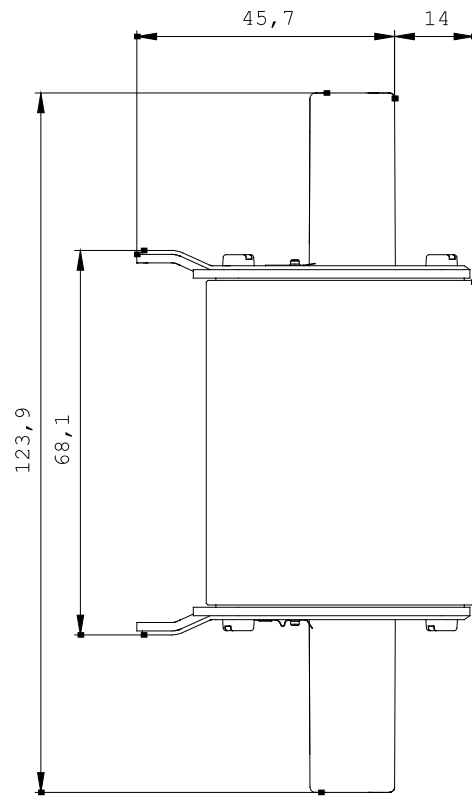

last change:

Jan 28, 2013