



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 1, 40A, AC 500V/DC 440V

Similar to image

### Technical data:

|                                                             |    |                                        |
|-------------------------------------------------------------|----|----------------------------------------|
| <b>Current / for AC / rated value</b>                       | A  | 40                                     |
| <b>Operating class of the fuse link</b>                     |    | gG                                     |
| <b>Size of the fallback-system / acc. to DIN EN 60269-1</b> |    | NH1                                    |
| <b>Supply voltage</b>                                       |    |                                        |
| • for AC / rated value                                      | V  | 500                                    |
| • for DC                                                    | V  | 440                                    |
| <b>Switching capacity current</b>                           |    |                                        |
| • in accordance with IEC 60947-2 / rated value              | kA | 120                                    |
| • with DC / in accordance with IEC 60947-2 / rated value    | kA | 25                                     |
| <b>Design of an identification indicator</b>                |    | Front indicators                       |
| <b>type of the assembly</b>                                 |    | Non-insulated grip lugs                |
| <b>Protection class IP</b>                                  |    | IP20, with connected conductors        |
| <b>Climatic class</b>                                       |    | -20 to +50 at 95% relative humidity    |
| <b>Ambient temperature</b>                                  |    |                                        |
| • minimum                                                   | °C | -5                                     |
| • maximum                                                   | °C | 40                                     |
| <b>Product description</b>                                  |    | Using screw adapter or adapter sleeves |

### Certificates/approvals:

| General Product Approval                                                          |                                                                                   |                                                                                   | Declaration of Conformity                                                         | Test Certificates                        |                                                    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------|
|  |  |  |  | <a href="#">Special Test Certificate</a> | <a href="#">Type Test Certificates/Test Report</a> |
| GOST                                                                              | KEMA                                                                              | VDE                                                                               | EG-Konf.                                                                          |                                          |                                                    |
| Shipping Approval                                                                 |                                                                                   | other                                                                             |                                                                                   |                                          |                                                    |
|  | <a href="#">Environmental Confirmations</a>                                       |                                                                                   |                                                                                   |                                          |                                                    |
| GL                                                                                |                                                                                   |                                                                                   |                                                                                   |                                          |                                                    |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NA3117/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NA3117](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3117)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datenorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

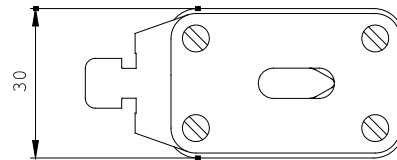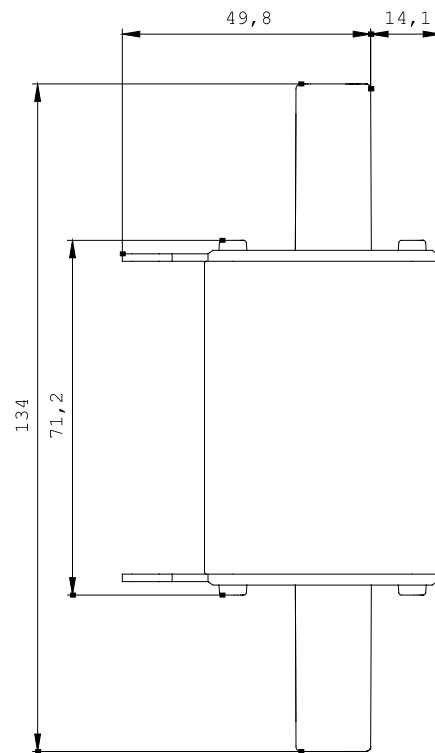

last change:

Jan 28, 2013