

SITOR FUSE SWITCH DISCONNECTOR 14X51,
UP TO 50 A, 690 V AC



Similar to image

Technical data:

Design of the operating mechanism		others
Design of the electrical connection / for main current circuit		screw-type terminals
Number of poles		1
Installation size of fuse-link		Other
Protection class IP / on the front		Other
Continuous current / rated value	A	50
Acceptability for application • emergency stop switch • safety cut-out switch • main switch • switch disconnecter		No Yes No Yes
Type of fixing/fixation • front mounting • Rail installation • floor mounting		Yes No No
Conditional short-circuit current / rated value	kA	100
Product function / fuse monitoring		No
Tension d'emploi / sous AC / valeur assignée / maximum	V	690

Certificates/approvals:

General Product Approval



Declaration of Conformity

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3NC1491/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1491

CAX-Online-Generator

<http://www.siemens.com/cax>

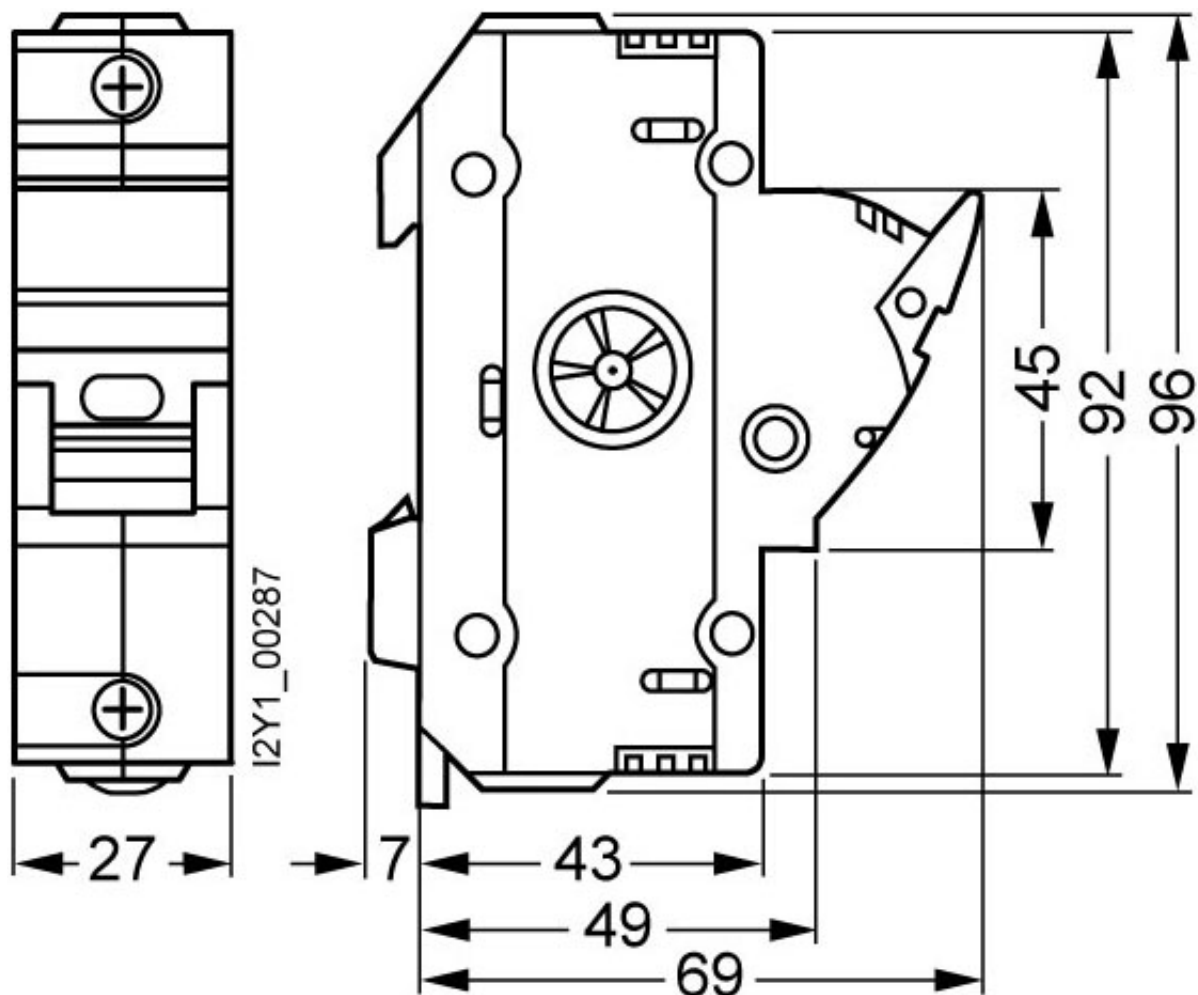



last change:

Feb 21, 2013