



SITOR CYLINDRICAL FUSE LINK AR 25 A,  
660 V AC/700 V DC

Similar to image

### Technical data:

|                                                      |    |             |
|------------------------------------------------------|----|-------------|
| Current / for AC / rated value                       | A  | 25          |
| Size of the fallback-system / acc. to DIN EN 60269-1 |    | 22 x 58     |
| Supply voltage                                       |    |             |
| • for AC / rated value                               | V  | 690         |
| • for DC                                             | V  | 400         |
| Switching capacity current                           |    |             |
| • in accordance with IEC 60947-2 / rated value       | kA | 200         |
| Design of an identification indicator                |    | others      |
| Ambient temperature                                  | °C | -20 ... +50 |

### Certificates/approvals:

#### General Product Approval



#### Declaration of Conformity



### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

---

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3NC2225/all>

---


**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NC2225](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC2225)

---

**CAX-Online-Generator**

<http://www.siemens.com/cax>

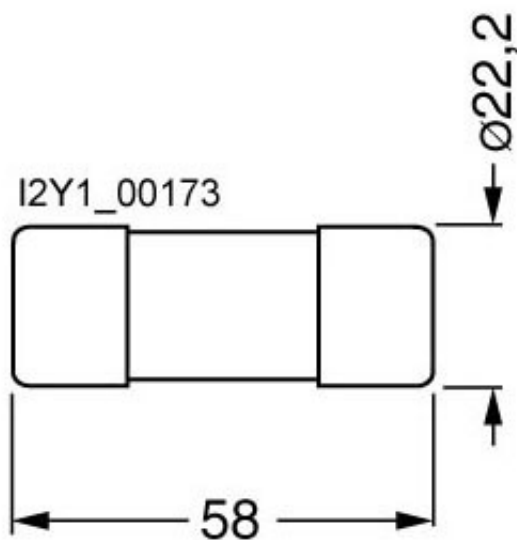

**last change:**

Feb 15, 2013