

SITOR fuse link, with slotted blade contacts, NH1, In: 63 A, gR, Un AC: 1000 V, Un DC: 600 V, Front indicator

Model		
product brand name		SENTRON
Design of an identification indicator		front indicator
Design of the fuse link		SITOR, LV HRC design
General technical data		
Size of fuse system / acc. to DIN EN 60269-1		NH1
Operating class of the fuse link		gR
circuit-breaker / Design		3NE
Supply voltage / at DC	V	600
Dissipation		
Power loss [W]		
for rated value of the current / at AC / in hot operating state / per pole	W	25
Electricity		
rated current In / IEC, DIN/VDE / at 40 Cel	A	63
Current / at AC / rated value	A	63
Mechanical Design		
Mounting position		Any, preferably vertical
Environmental conditions		
Ambient temperature		
minimum	°C	-20
maximum	°C	50
Environmental category		-20 to +50 at 95% relative humidity
Certificates		
Equipment marking		
acc. to DIN EN 61346-2		F
acc. to DIN EN 81346-2		F
General Product Approval		



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NE3218-0MK>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NE3218-0MK/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE3218-0MK

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

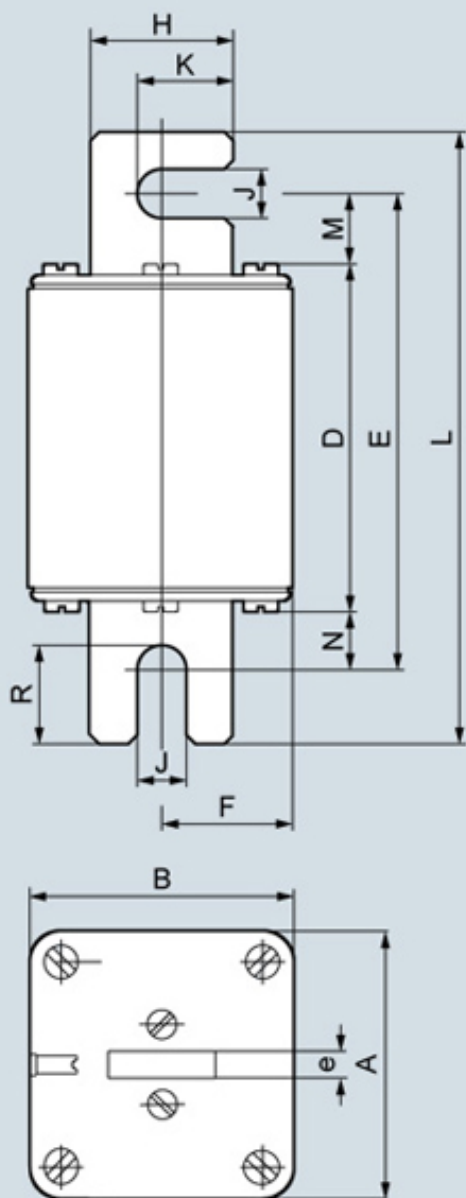

Type	Dimensions													
	A	B	D	E	F	H	J	K	L	M	N	R	e	
3NE32..-0MK	52	52	78,4	106,6	26	25	11	18	137	15,7	12,5	22,3	6	
3NE32..-0MK08	52	52	78,4	106,6	26	25	11	18	137	15,7	12,5	22,3	6	
3NE53..-0MK06	60	60	137	165,5	30	32	11	21,5	196	15,8	12,8	22,1	6	

last modified:

08/11/2016