



SITOR FUSE-LINK FOR SEMICONDUCTOR PROTECTION
315A AR,
AC 690V, DC 700V SIZE 000, BRACKETS 80MM

Similar to image

Technical data:		
Current / for AC / rated value	A	315
Size of the fallback-system / acc. to DIN EN 60269-1		NH000
Supply voltage		
• for AC / rated value	V	690
• for DC	V	250
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	200
• with DC / in accordance with IEC 60947-2 / rated value	kA	50
Design of an identification indicator		others
Ambient temperature	°C	-20 ... +50
Varying load factor (WL)		0.85

Certificates/approvals:	
General Product Approval	Declaration of Conformity
 CSA	 GOST
 UL	 EG-Konf.

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3NE8731-1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE8731-1

CAX-Online-Generator

<http://www.siemens.com/cax>

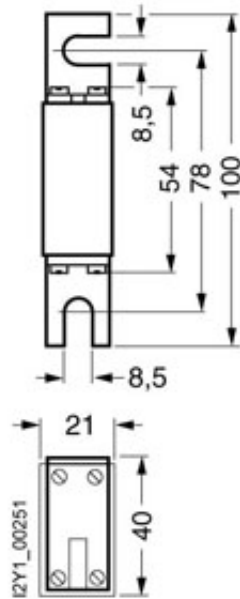

last change:

Feb 15, 2013