



SITOR fuse link, with blade contacts, NH000, In: 32 A, gR, Un AC: 690 V, Un DC: 440 V, front indicator

Model		
product brand name		SENTRON
product designation		SITOR fuse link
design of the product		With blade contacts
design of an identification indicator		front indicator
design of the switching contact		With bolt-on links, silver-plated
design of the fuse link		SITOR, LV HRC design
General technical data		
size of fuse system according to EN 60269-1		NH000
operating class of the fuse link		gR
type of voltage of the operating voltage		AC/DC
Supply voltage		
supply voltage		
• at AC rated value		690 V
• at DC		440 V
Dissipation		
power loss [W]		11 W
power loss [W]		
• for rated value of the current at AC in hot operating state per pole		11 W
Current		
operational current		
• at 30 °C rated value		32 A
• at 40 °C rated value		32 A
• at 45 °C rated value		32 A
• at 50 °C rated value		31.68 A
• at AC rated value		32 A
Product details		
product description		Not non-interchangeable
accessories included		with blade contacts for mounting in LV HRC fuse bases or switch disconnectors
Mechanical Design		
mounting position		Any, preferably vertical
net weight		139 g
Environmental conditions		
ambient temperature during operation		
• minimum		-20 °C
• maximum		50 °C
environmental category		-20 to +50 at 95% relative humidity
General Product Approval		Declaration of Conformity
		other

[Confirmation](#)



[Miscellaneous](#)

[Environmental Con-
firmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NE8801-0MK>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NE8801-0MK>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE8801-0MK

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

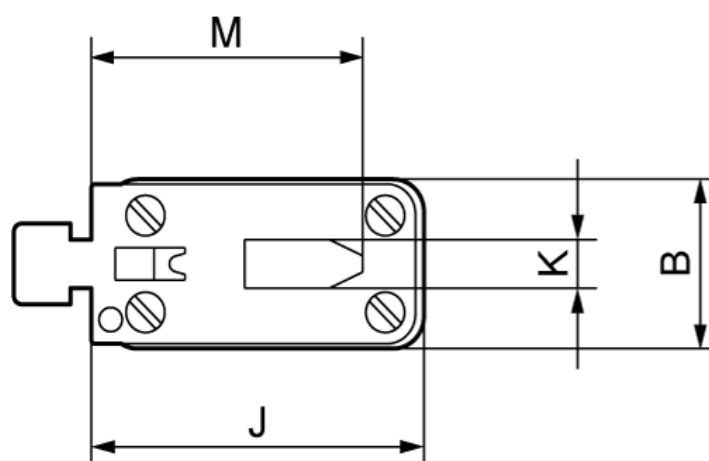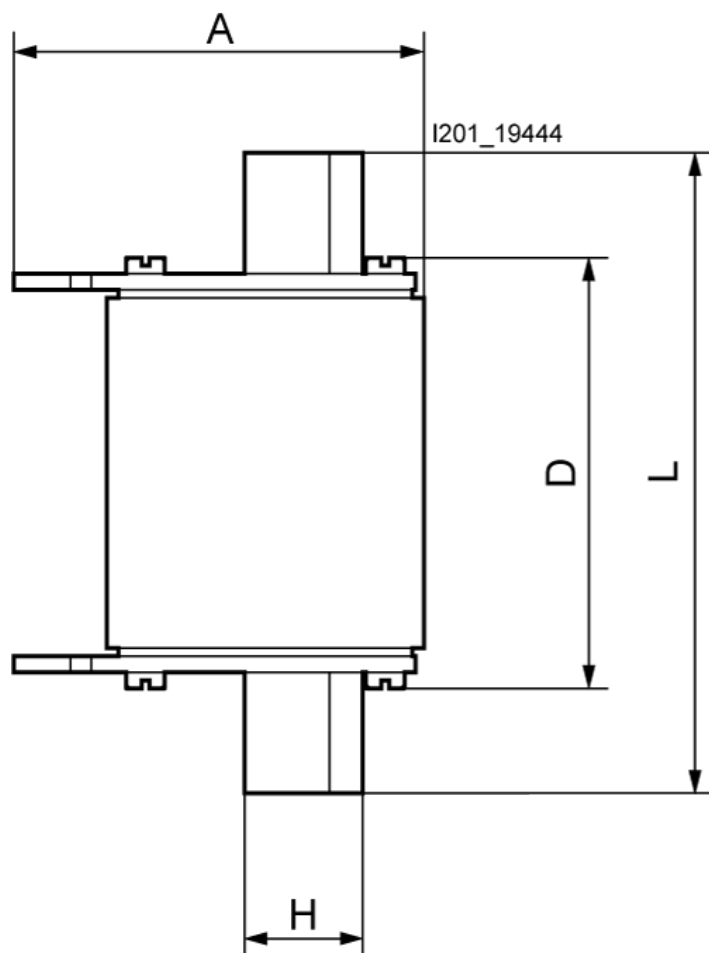

Type	Dimensions							
	A	B	D	H	J	K	M	L
3NE88..-0MK	53	21	51,5	15	43	6	35	78,5
3NE82..-0MK	62,5	44	70,5	20	53	6	40	135
3NE83..-0MK	68	50	70,5	25	61	6	48	150

