

### SITOR FUSE-LINK 850A , AC 600V



Similar to image

#### Technical data:

|                                                                                           |    |                                     |
|-------------------------------------------------------------------------------------------|----|-------------------------------------|
| product brand name                                                                        |    | SETRON                              |
| Current / for AC / rated value                                                            | A  | 850                                 |
| Operating class of the fuse link                                                          |    | gR                                  |
| Size of the fallback-system / acc. to DIN EN 60269-1                                      |    | others                              |
| Supply voltage                                                                            |    |                                     |
| • for AC / rated value                                                                    | V  | 600                                 |
| • for DC                                                                                  | V  | 250                                 |
| Switching capacity current                                                                |    |                                     |
| • in accordance with IEC 60947-2 / rated value                                            | kA | 100                                 |
| Design of the fuse link                                                                   |    | Fuses for special applications      |
| Design of an identification indicator                                                     |    | others                              |
| mounting position                                                                         |    | Any, preferably vertical            |
| Climatic class                                                                            |    | -20 to +50 at 95% relative humidity |
| Ambient temperature                                                                       | °C | -20 ... +50                         |
| Varying load factor (WL)                                                                  |    | 1                                   |
| Resistive loss                                                                            | W  | 85                                  |
| Active power loss / at rated value current / with AC / in warm operating state / per pole | W  | 85                                  |

Reference code / according to DIN EN 61346-2

F

Item designation / according to DIN EN 81346-2

F

#### Certificates/approvals:

General Product  
Approval

Declaration of Conformity



#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NE9440-6>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3NE9440-6/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NE9440-6](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE9440-6)

CAX-Online-Generator

<http://www.siemens.com/cax>

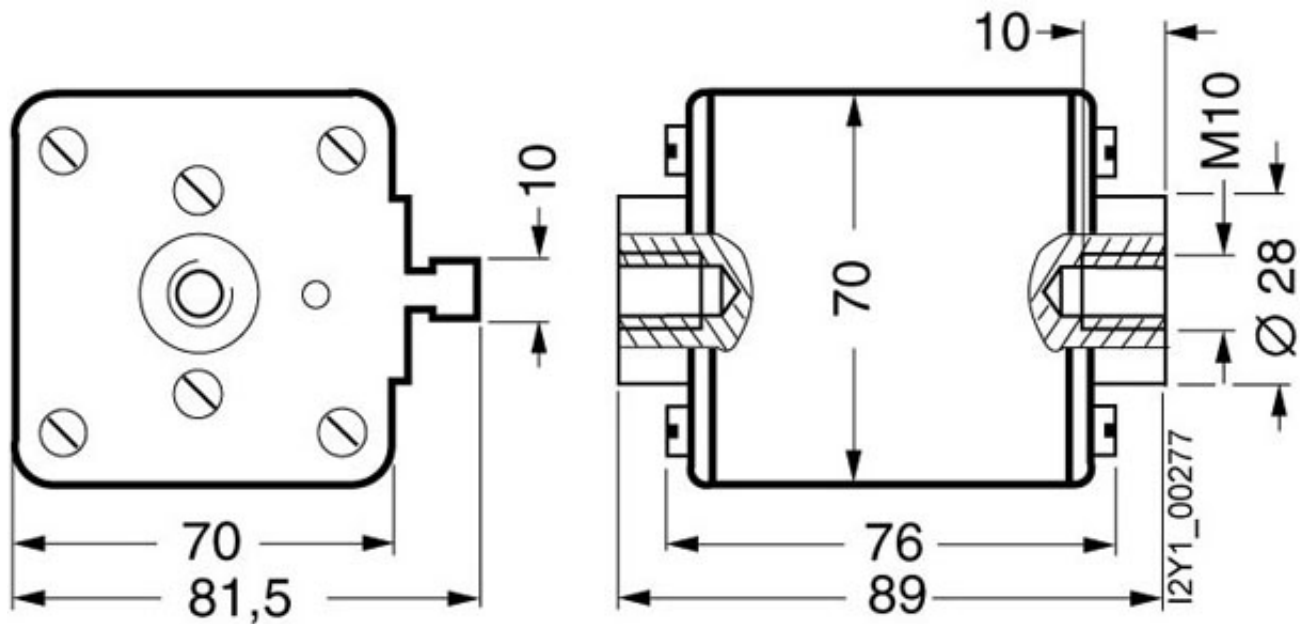

last change:

Jul 14, 2014