



SITOR fuse holder 1250 A 1250 V 1-pole with bolt terminal with fixing dimension 110 mm

| Model                                               |                           |                                   |
|-----------------------------------------------------|---------------------------|-----------------------------------|
| product brand name                                  |                           | SENTRON                           |
| product designation                                 |                           | LV HRC fuse system                |
| design of the thread of the connection screw        |                           | M10                               |
| design of the product                               |                           | LV HRC fuse base for screw fixing |
| General technical data                              |                           |                                   |
| number of poles                                     |                           | 1                                 |
| utilization category                                |                           | Without                           |
| Supply voltage                                      |                           |                                   |
| supply voltage                                      |                           |                                   |
| • at AC rated value                                 | 1 250 V                   |                                   |
| • at DC                                             | 1 250 V                   |                                   |
| Product details                                     |                           |                                   |
| product component swivel-in mechanism               |                           | No                                |
| Connections                                         |                           |                                   |
| tightening torque with screw-type terminals maximum |                           | 20 N·m                            |
| type of electrical connection                       |                           | for mounting on mounting plate    |
| • for main current circuit                          |                           | Stud terminal                     |
| Mechanical Design                                   |                           |                                   |
| height                                              |                           | 153 mm                            |
| width                                               |                           | 55 mm                             |
| fastening method                                    |                           | fixed mounting                    |
| fastening method bus-mounting                       |                           | No                                |
| net weight                                          |                           | 595 g                             |
| General Product Ap-<br>proval                       | Declaration of Conformity | other                             |

[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NH5463>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3NH5463>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NH5463](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NH5463)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

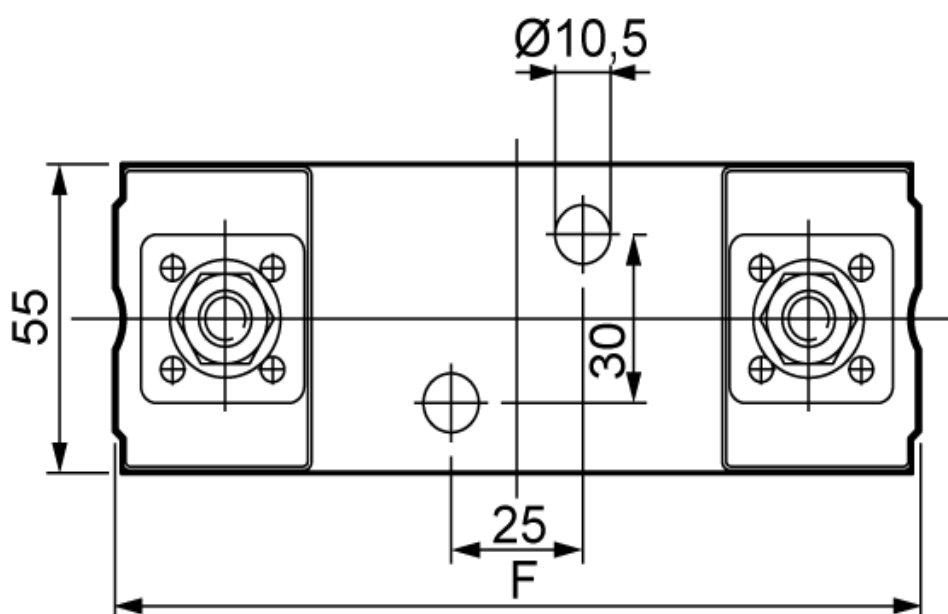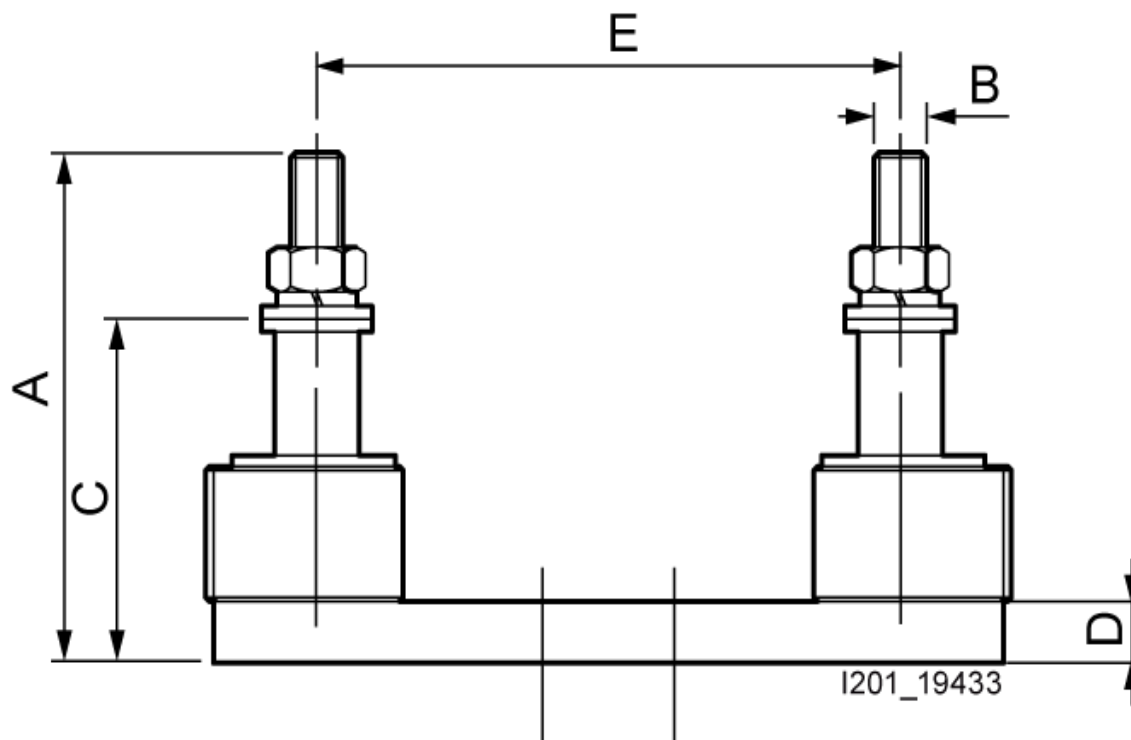

| Type           | Dimensions |     |    |    |     |     |
|----------------|------------|-----|----|----|-----|-----|
|                | A          | B   | C  | D  | E   | F   |
| <b>3NH5463</b> | 94         | M10 | 65 | 11 | 110 | 153 |
| <b>3NH5473</b> | 101        | M10 | 72 | 11 | 170 | 211 |



