
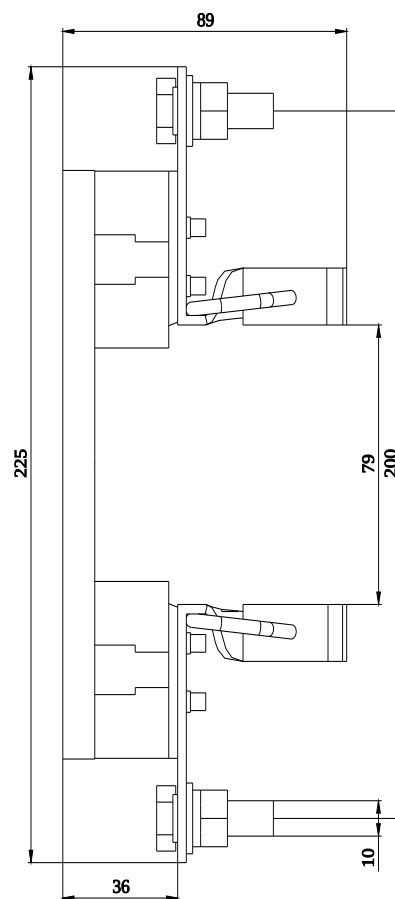


HRC fuse base ceramic Sz. 2 1-pole 400A 690V (1000V) flat terminal

| Model                                                             |                         |
|-------------------------------------------------------------------|-------------------------|
| design of the thread of the nut                                   | M10                     |
| design of the thread of the connection screw                      | M10                     |
| General technical data                                            |                         |
| number of poles                                                   | 1                       |
| size of fuse system according to EN 60269-1                       | NH2                     |
| utilization category                                              | Without                 |
| Supply voltage                                                    |                         |
| supply voltage                                                    |                         |
| • at AC                                                           | 690 V                   |
| • at DC                                                           | 690 V                   |
| Product details                                                   |                         |
| product component swivel-in mechanism                             | No                      |
| maximum short-circuit current breaking capacity (Icu)             |                         |
| • at AC rated value                                               | 120 kA                  |
| • at DC rated value                                               | 120 kA                  |
| Connections                                                       |                         |
| connectable conductor cross-section on terminal strip             |                         |
| • minimum                                                         | 25 mm <sup>2</sup>      |
| • maximum                                                         | 240 mm <sup>2</sup>     |
| tightening torque of the screw for securing the equipment maximum | 6 N·m                   |
| tightening torque with screw-type terminals maximum               | 32 N·m                  |
| type of electrical connection                                     | With flat-type terminal |
| • for main current circuit                                        | with flat-type terminal |
| Mechanical Design                                                 |                         |
| height                                                            | 225 mm                  |
| width                                                             | 65 mm                   |
| depth                                                             | 89 mm                   |
| fastening method                                                  | fixed mounting          |
| fastening method bus-mounting                                     | No                      |
| net weight                                                        | 840 g                   |
| Approvals Certificates                                            |                         |
| other                                                             |                         |

[Confirmation](#)

| Further information                                                                             |                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Information on the packaging                                                                    | <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                           |
| Information- and Downloadcenter (Catalogs, Brochures,...)                                       | <a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>                                                               |
| Industry Mall (Online ordering system)                                                          | <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NH6330">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NH6330</a> |
| Service&Support (Manuals, Certificates, Characteristics, FAQs,...)                              | <a href="https://support.industry.siemens.com/cs/ww/en/ps/3NH6330">https://support.industry.siemens.com/cs/ww/en/ps/3NH6330</a>                                   |
| Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) | <a href="http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NH6330">http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NH6330</a>                 |
| CAX-Online-Generator                                                                            | <a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a>                                                                                               |
| Tender specifications                                                                           | <a href="http://www.siemens.com/specifications">http://www.siemens.com/specifications</a>                                                                         |

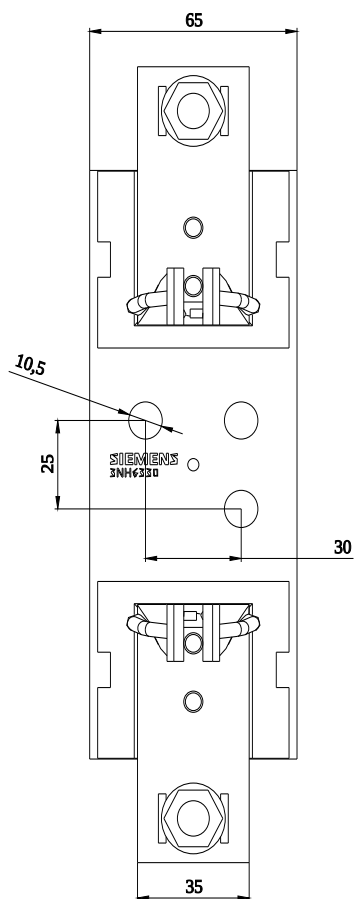

last modified:

2/6/2025 

