



FUSE LOAD ISOLATING UNIT 3-POLE SWITCHABLE,
SIZE 00 I=160 A,
U=690 V SCREW TERMINAL M 8 NEW DESIGN

Similar to image

General technical details:

Continuous current / rated value	A	160
Operating voltage		
• for DC / rated value	V	440
• at 50/60 Hz / for AC / rated value	V	690
Number of poles		3
Active power loss / maximum	W	18
Item designation		
• according to DIN EN 61346-2		Q

Mechanical design:

Design of the load switch		
• Strip form		Yes
Type of mounting		Flachanschluss, M 10
Design of the electrical connection		
• for main current circuit		screw-type terminals
Fuse system		LV HRC fuse
Center line spacing	mm	100
• 40 mm		No
• 50 mm		No

- 60 mm
- 100 mm
- 185 mm

No
Yes
No

Ambient conditions:

Ambient temperature

- during operating

°C

-25 ... +55

Depth

mm

121

Height

mm

410

Width

mm

49.8

Certificates/approvals:

General Product Approval

Test Certificates

other



CCC



GOST

[Special Test Certificate](#)

[Declaration of Conformity](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NJ4103-3BF02/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NJ4103-3BF02

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

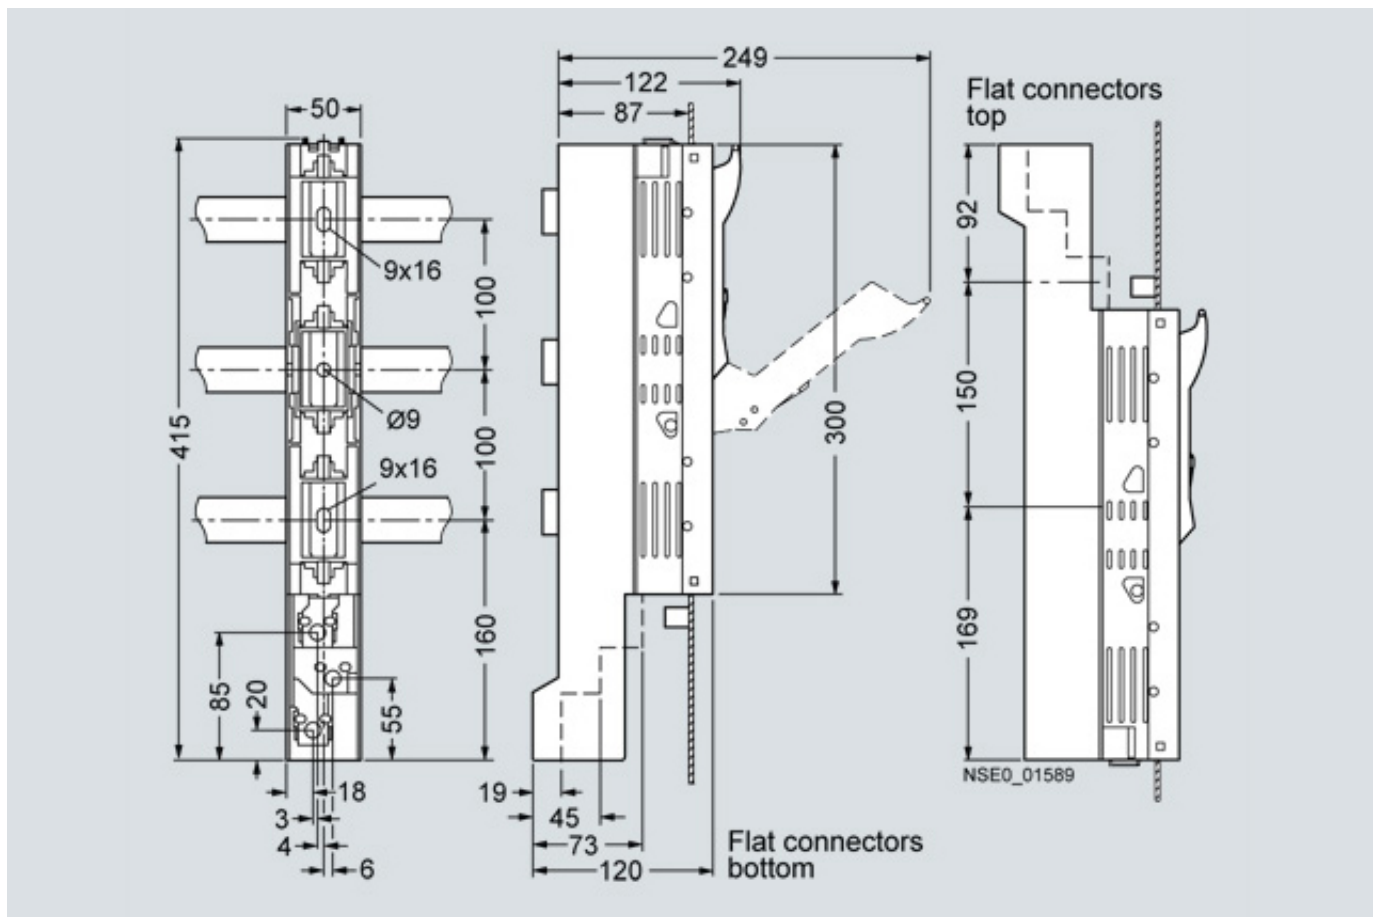

last change:

Dec 3, 2012