

DISCONNECTOR-FUSE IN-LINE TYPE,
CAN BE PLUGGED IN NH00 160A,
3-POLE STANDARD SWITCHING CAPACITY S MANUAL
OPERATION



Similar to image

General technical details:

Operating voltage		
• at 50/60 Hz / for AC / rated value	V	690
Number of NC contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts		1
Item designation		
• according to DIN EN 61346-2		Q
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		Q

Mechanical features:

Type of the driving mechanism		manual operating mechanism
Type of mounting		plug-in
Fuse system		LV HRC fuse
Installation size of fuse-link		00
Center line spacing	mm	185
Width	mm	590
Height	mm	308

Ambient conditions:

Ambient temperature	°C	-25 ... +55
• during operating		
Protection class IP		IP41

Certificates/approvals:

General Product Approval	EMC	Declaration of Conformity	Shipping Approval
 GOST	 C-TICK	 EG-Konf.	 DNV

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3NJ6203-1AA0-..../all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NJ6203-1AA0-....

CAX-Online-Generator

<http://www.siemens.com/cax>

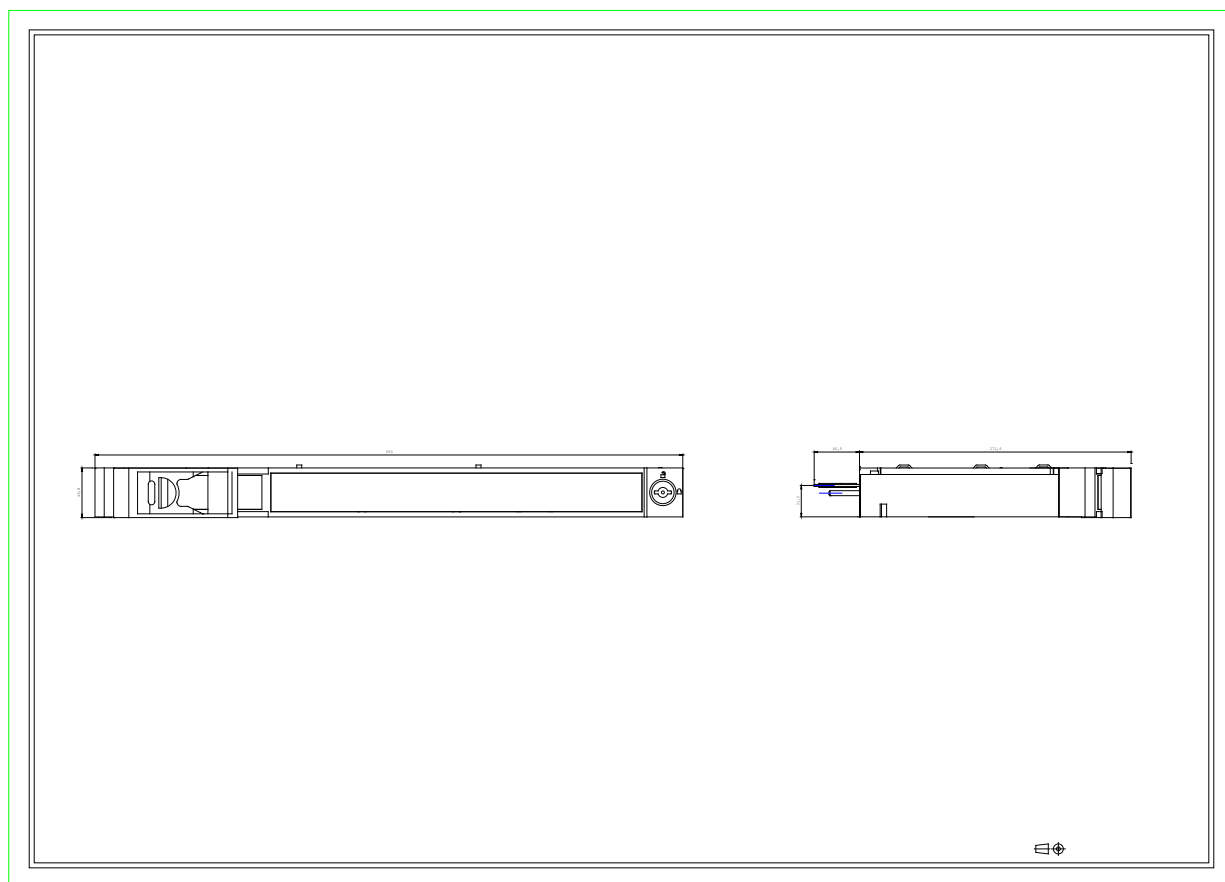

last change:

Oct 2, 2012