

DISCONNECTOR-FUSE IN-LINE TYPE,
CAN BE PLUGGED IN NH2 400A,
3-POLE STANDARD SWITCHING CAPACITY S MANUAL
OPERATION



Similar to image

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Global Industry Mall (Online ordering system)


<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NJ6223-1AA0-..../all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NJ6223-1AA0-....

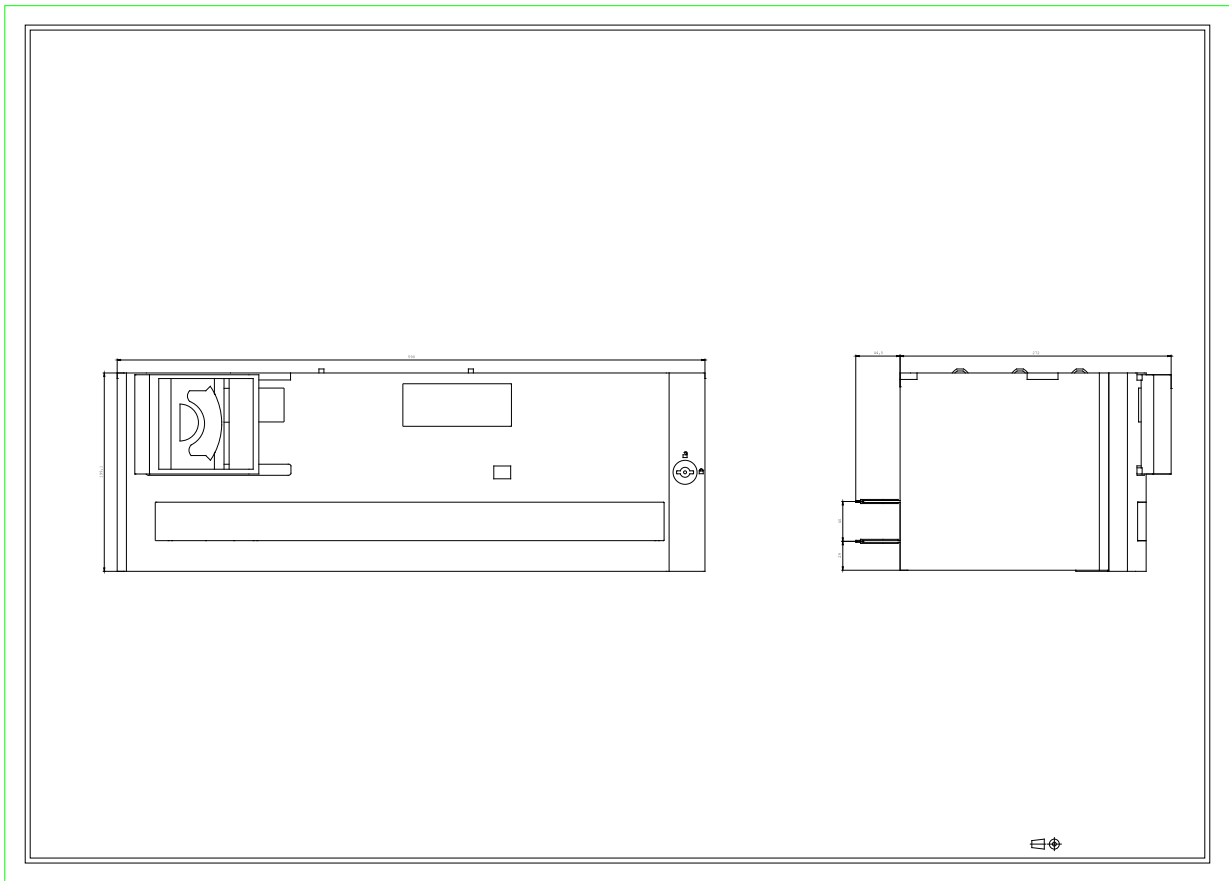

last change:

Oct 2, 2012