



FUSE-SWITCH-DISCONNECTOR 3-POLE, NH000,
160A MOUNTING PLATE CONSTRUCTION COVER LEVEL
45 MM BOX TERMINAL

Similar to image

General technical details:		
Type from device		Auf- und Einbau
mounting position		waagrecht oder senkrecht
Width	mm	88.8
Height	mm	141.7
Depth	mm	76.6
Continuous current		
• at 40 °C / rated value	A	150
• at 45 °C / rated value	A	140
• at 50 °C / rated value	A	130
• at 55 °C / rated value	A	120
Operational current		
• at AC-21 B		
• at 400 V / rated value	A	160
• at 500 V / rated value	A	160
• at 690 V / rated value	A	160
• at AC-22 B / at 400 V / rated value	A	160
Rated current Ie / maximum / in utilization category		
• AC-22 B		

• at 500 V	A	125
• at 690 V	A	50
• AC-23 B		
• at 400 V	A	160
• at 500 V	A	40
• at 690 V	A	25
• Capacitor		
• at 400 V	A	72
• at 500 V	A	55
Operational current		
• at DC-21 B		
• at 240 V / rated value / maximum	A	160
• at 440 V / rated value / maximum	A	100
• at DC-22 B		
• at 240 V / rated value / maximum	A	100
• at 440 V / rated value / maximum	A	50
• at DC-23 B		
• at 240 V / rated value / maximum	A	80
• at 440 V / rated value / maximum	A	25
Conditional short-circuit current (I_q)		
• at 500 V / with AC / with speedy activation / rated value	kA	80
• at 690 V / with AC / with speedy activation / rated value	kA	80
• with closed switch		
• at 500 V / with AC / rated value	kA	120
• at 690 V / with AC / rated value	kA	120
Operating voltage / for DC / rated value	V	440
Insulation voltage / rated value	V	690
Impulse voltage resistance / rated value	kV	8
Tension d'emploi		
• sous AC		
• rated value	/ V	690
• for DC		
• rated value	/ V	440
Power factor		
• at AC-21 B		0.95
• at AC-22 B		0.65
• at AC-23 B		0.45
• with capacitive load		-0.25
I_{2t} value / with closed switch / maximum permissible	kA ² ·s	56
Let-through current		

• with speedy activation / maximum permissible	kA	10
• with closed switch / maximum permissible	kA	15
Design of the load switch / Strip form		No
Fuse system		LV HRC fuse
Installation size of fuse-link		NH000
Installation size of disconnecting link		000
Active power loss / maximum	W	9
Product expansion / optional / fuse monitoring		Yes
Product component / phase failure monitoring		No
Product extension / optional		
• phase failure monitoring		Yes
• voltage trigger		No
• overvoltage protection monitoring		Yes
• locking capability		Yes
Product component		
• undervoltage release mechanism		No
• undervoltage release with leading contact		No
Product function / overvoltage protection monitoring		No
Product feature / sealable		Yes
Type of the driving mechanism / motor drive		No
Design of the electrical connection / for main current circuit		box terminals
Arrangement of electrical connectors / for main current circuit		sonstige
Conductor cross-section that can be connected / for main contacts		
• solid	mm ²	1.5 ... 50
• stranded	mm ²	1.5 ... 50
• stranded wire		
• with conductor end processing	mm ²	1.5 ... 35
Type of connectable conductor cross-sections / of laminated conductors / maximum		8 x 8 mm
Tightening torque		
• with screw-type terminals	N·m	10 ... 12
Product extension / auxiliary switch		Yes
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		0
Acceptability for application		
• switch disconnecter		Yes
• emergency stop switch		No
• main switch		No
• safety cut-out switch		Yes

• maintenance/repair switch		Yes
Type of mounting		floor mounting
• Rail installation		No
• front mounting		No
• floor mounting		Yes
IP degree of protection		IP20
• open		
• with closed switch		IP30
• without cover or cable lug cover		IP40
• with cover or cable lug cover		
Degree of pollution		3
Mechanical operating cycles as operating time / typical		2,000
Item designation / according to DIN EN 61346-2		Q

Ambient conditions:

Ambient temperature

- during operating
- during storage

°C	-25 ... +55
°C	-50 ... +80

Certificates/approvals:

General Product Approval

Declaration of Conformity

CB

CB



CCC



GOST



UL



EG-Konf.

Test Certificates

Shipping Approval

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



DNV



GL



LRS

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/3NP1123-1CA20/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP1123-1CA20

CAX-Online-Generator

<http://www.siemens.com/cax>

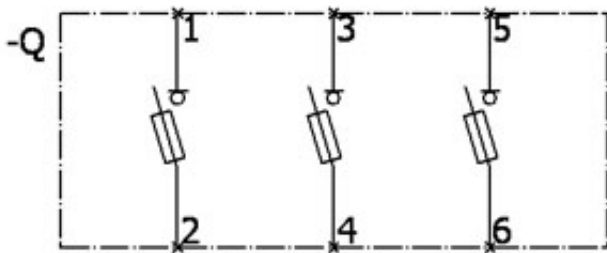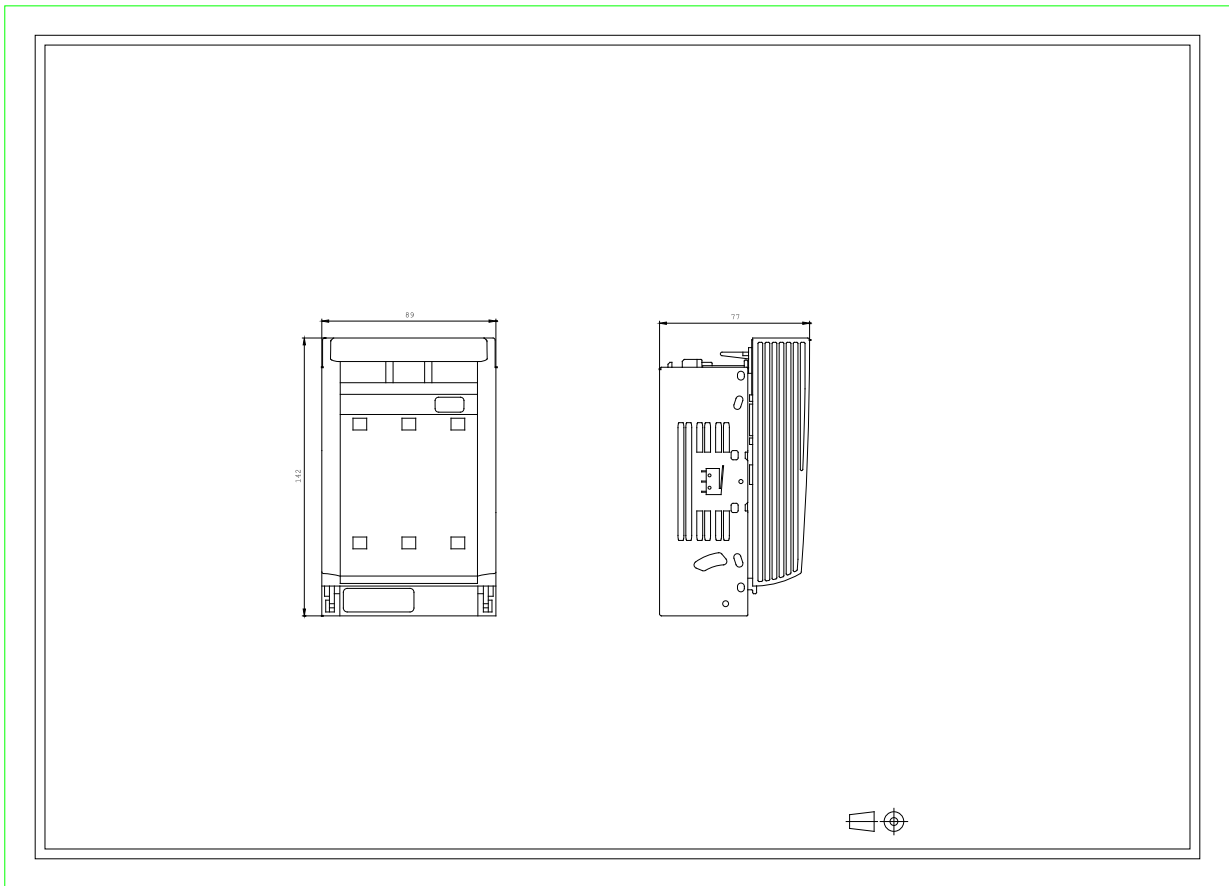

last change:

Nov 2, 2012