



FUSE LINK CLASS CC ACC. TO UL STANDARD 248-4  
QUICK-RESPONSE,  
CURRENT-LIMIT. RATED CURRENT 25 A RATED  
VOLTAGE UP TO 600 V AC SIZE 10.3 MM X 38.1 MM

Similar to image

### Technical data:

|                                 |   |        |
|---------------------------------|---|--------|
| product brand name              |   | SETRON |
| Operating current / rated value | A | 25     |
| Operating voltage / rated value | V | 600    |
| Product component / striker     |   | No     |

### Certificates/approvals:

#### General Product Approval



### Further information:

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)


<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NW2250-0HG>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NW2250-0HG/all>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NW2250-0HG](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW2250-0HG)

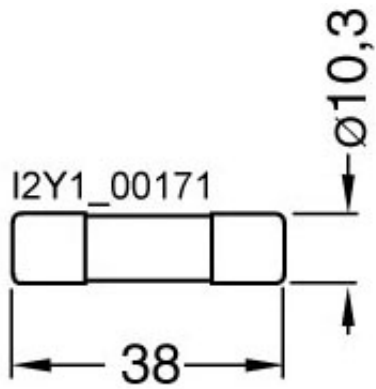

last change:

Jul 7, 2014