



FUSE LINK CLASS CC ACC. TO UL STANDARD 248-4
SLOW-BLOW,
CURRENT-LIMITING RATED CURRENT 2 A RATED
VOLTAGE UP TO 600 V AC SIZE 10.3 MM X 38.1 MM

Similar to image

Technical data:		
product brand name		SETRON
Operating current / rated value	A	2
Operating voltage / rated value	V	600
Product component / striker		No

Certificates/approvals:	
General Product Approval	




Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)
<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NW3020-0HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3NW3020-0HG/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW3020-0HG

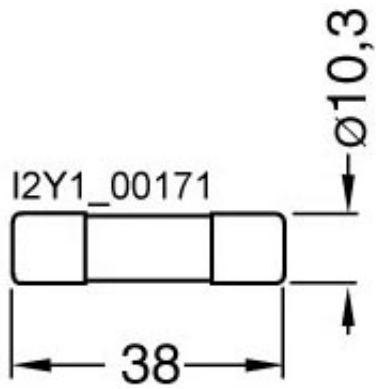

last change:

Jul 7, 2014