

LOAD FEEDER FUSELESS DIRECT START,
AC 400V, SZ.S2, 18...25A ;
DC 24V 1NO (CONTACTOR),
SCREW-TYPE TERMINAL MOUNTING RAIL ADAPTER
TYPE OF COORDINATION 2,
IQ = 50KA CONTACTOR WITH CC COIL 1NO+1NC (AS
MCB SPRING-LOADED) 2NO+2NC (AS CONTACTOR
SPRING-LOADED)

General technical data:		
product brand name		SIRIUS
Product designation		non-fused load feeder
Design of the product		direct starter
Size of the load feeder		S2
Protection class IP / on the front		IP20
Degree of pollution		3
Insulation voltage / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during storage	°C	-55 ... +80
• during operating	°C	-20 ... +70
Resistance against shock		8g
Impulse voltage resistance / rated value	kV	6
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		Q
• according to DIN EN 61346-2		Q
Type of assignment		2
Mechanical operating cycles as operating time / of the contactor / typical		10,000,000
Manufacturer article number		
• of the standard mounting rail adapter included in the scope of supply		3RA1932-1AA00
• of the circuit-breakers included in the scope of supply		3RV1031-4DA10
• of the contactor included in the scope of supply		3RT1034-1BB40
• of the link module included in the scope of supply		3RA1931-1BA00
Design of the switching contact		electromechanical
Type of the motor protection		bimetal

Adjustable response current		
• of the current-dependent overload release	A	18 ... 25
Communication/ Protocol:		
Product function / bus-communication		No
Protocol / is supported		
• AS interface protocol		No
• PROFIBUS DP protocol		No
• PROFINET protocol		No
Main circuit:		
Number of poles / for main current circuit		3
Operating voltage / at AC-3 / rated value / maximum	V	400
Operating current / at AC-3 / at 400 V / rated value	A	22
Service power / at AC-3 / at 400 V / rated value	kW	11
Off-load operating frequency	1/s	15
Control circuit/ Control:		
Voltage type / of control feed voltage		DC
Control supply voltage / 1		
• for DC		
• rated value	V	24
Auxiliary circuit:		
Product extension / auxiliary switch		Yes
Number of NC contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts		1
Number of changeover contacts / for auxiliary contacts		0
Inputs/ Outputs:		
Number of digital inputs		0
Short-circuit:		
Product function / short circuit protection		Yes
Design of the short-circuit protection		circuit-breakers
Breaking capacity limit short-circuit current (I_{cu}) / at 400 V / rated value	kA	50
Installation/ mounting/ dimensions:		
mounting position		bei senkrechter Montageebene +/-90° drehbar, bei senkrechter Montageebene +/- 22,5° nach vorne und hinten kippbar
Mounting type		snap-on mounting
Width	mm	55

Height	mm	295
Depth	mm	173
Distance, to be maintained, to the ranks assembly / sideways	mm	0
Distance, to be maintained, to earthed part		
• forwards	mm	10
• backwards	mm	0
• upwards	mm	50
• sideways	mm	10
Distance, to be maintained, conductive elements		
• forwards	mm	10
• backwards	mm	10
• downwards	mm	0
• sideways	mm	50

Connections/ terminals:

Design of the electrical connection / for main current circuit		screw-type terminals
Type of the connectable conductor cross-section		
• for main contacts		
• solid		0.7 ... 35 mm ² , 2x (0.75 ... 25 mm ²)
• stranded		0.7 ... 35 mm ² , 2x (0.75 ... 25 mm ²)
• finely stranded / with conductor end processing		0.75 ... 25 mm ² , 2x (0.75 ... 16 mm ²)
• for AWG conductors / for main contacts		2x (30 ... 2)
Verification of suitability		UL / CSA / CCC / GL / LRS / BV / DNV / PRS

Certificates/ approvals:

General Product Approval	For use in hazardous locations	Declaration of Conformity
--------------------------	--------------------------------	---------------------------



Shipping Approval



other

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<http://www.siemens.com/industrial-controls/mall>

Cax online generator
<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3RA1136-4DB34-7BB4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA1136-4DB34-7BB4

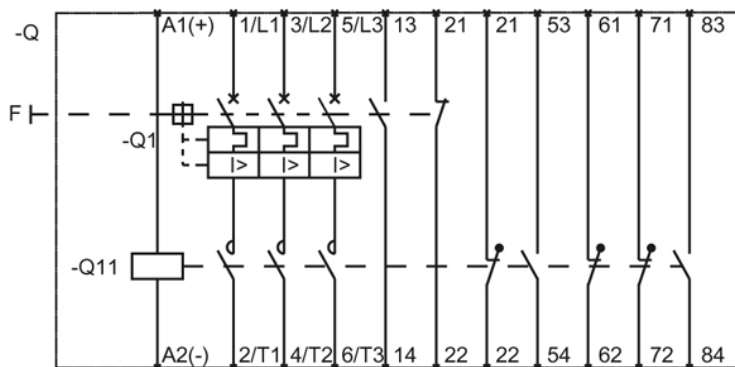

last change:

Jul 28, 2014