



LOAD FEEDER FUSELESS REVERSING DUTY,  
AC 400 V, SIZES00, 0.28...0.4 A,  
AC 24 V SCREW CONNECTION,  
TYPE OF COORDIN. 2, IQ = 50 KA

### Certificates/ approvals:

General Product Approval

For use in  
hazardous  
locations

Declaration of Conformity



### Shipping Approval



### other

[other](#)

[Environmental  
Confirmations](#)

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

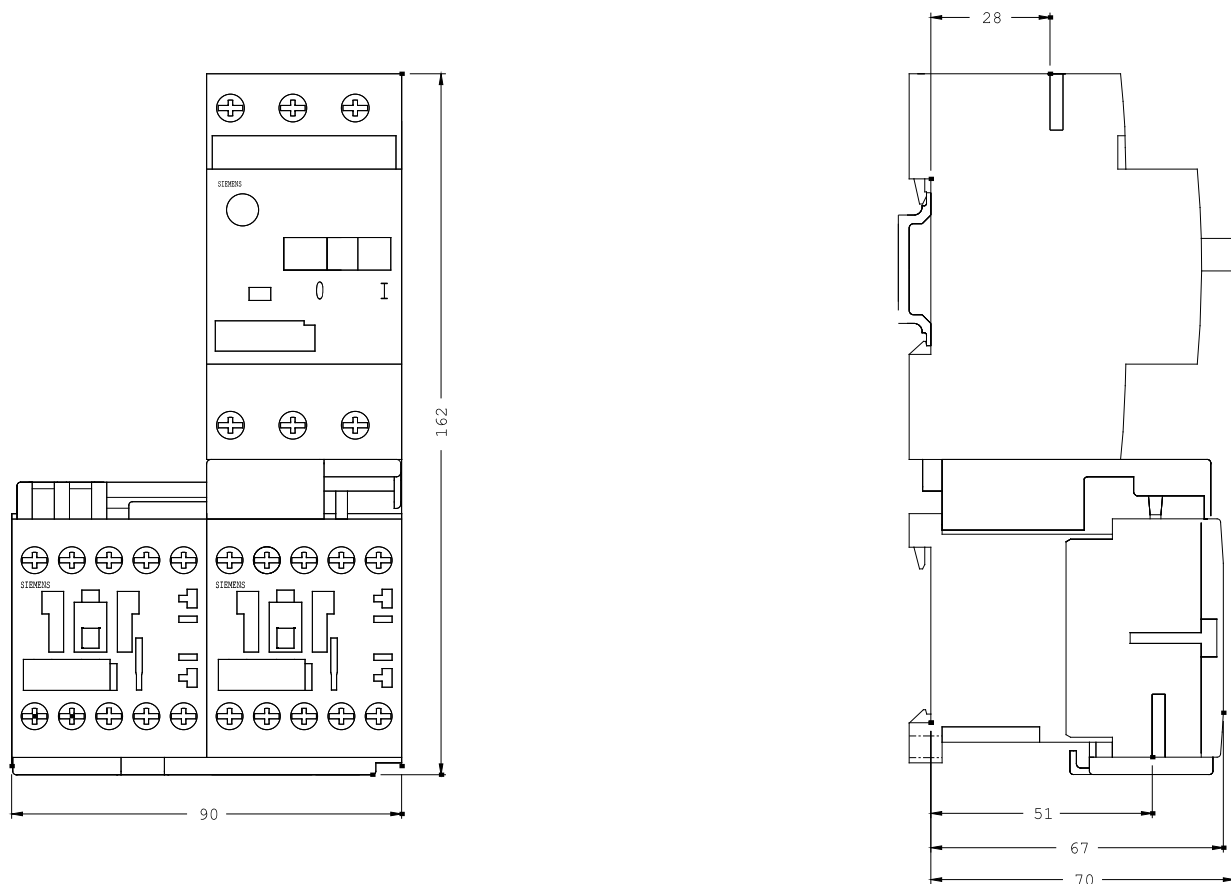

last change: