



LOAD FEEDER FUSELESS REVERSING DUTY,
AC 400 V, SIZES00, 0.7....1 A,
DC 24V SCREW CONNECTION,
TYPE OF COORDIN. 2, IQ = 50 KA

Certificates/ approvals:

General Product Approval

For use in
hazardous
locations

Declaration of Conformity



EG-Konf.

Shipping Approval



GL



LRS



RINA



RMRS

other

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)



<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

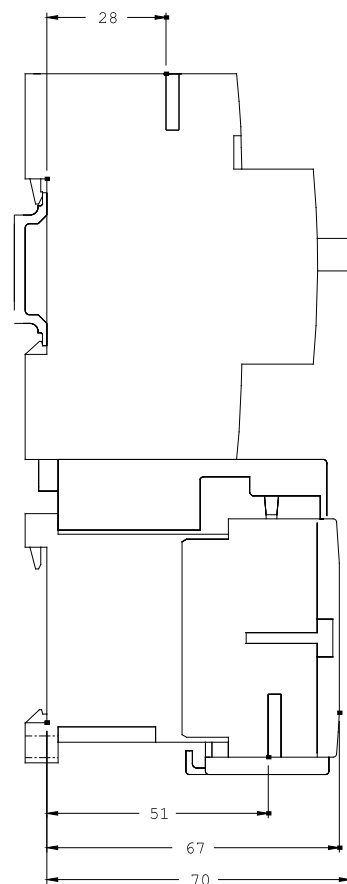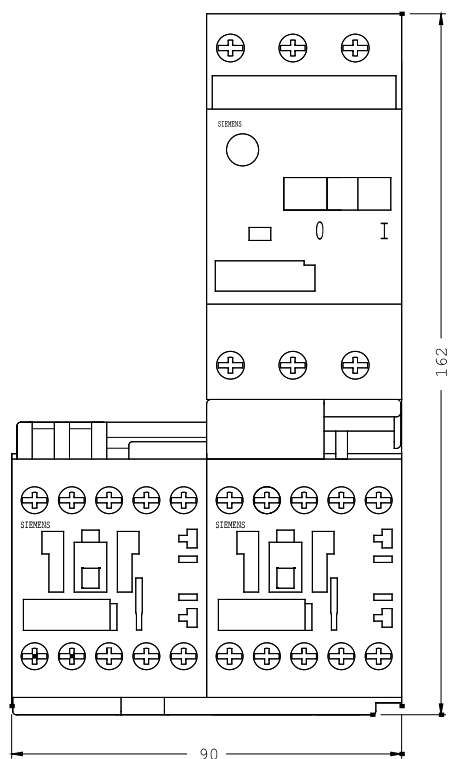

last change: