

LOAD FEEDER FUSELESS REVERSING DUTY,
AC 400 V, SIZES0, 1.4...2 A,
DC 24V SCREW CONNECTION TYPE OF COORDIN. 2,
IQ = 50 KA

Certificates/ approvals:

General Product
Approval

For use in
hazardous
locations

Declaration of Conformity



Shipping Approval



other

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA1215-1DL16-4BB4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA1215-1DL16-4BB4

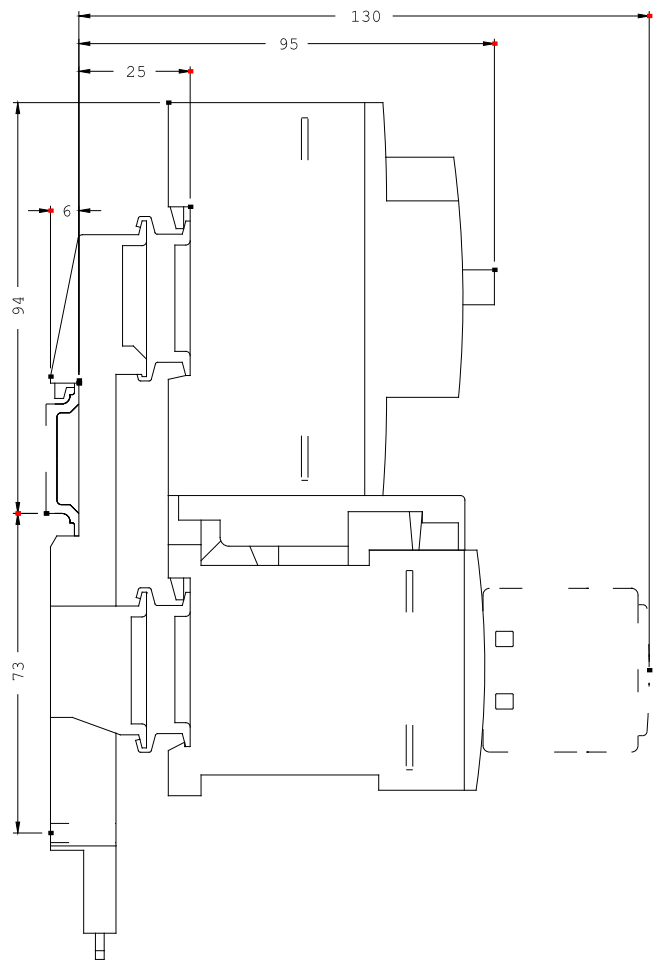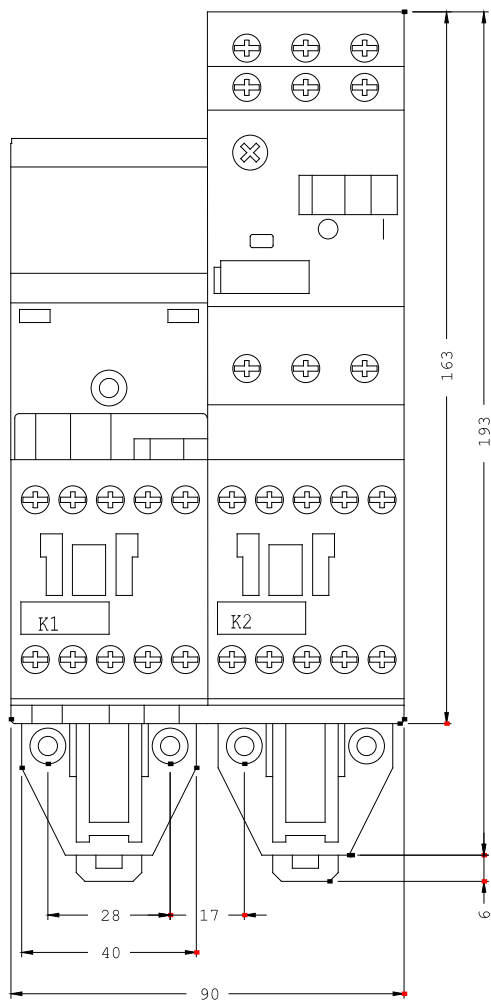

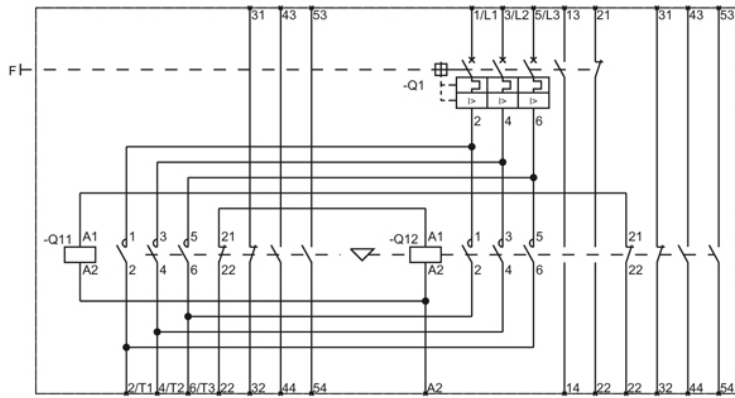

last change: