



LOAD FEEDER FUSELESS REVERSING DUTY,  
AC 400 V, SIZES0, 14...20 A,  
AC 110V 50 HZ, SCREW CONNECTION,  
TYPE OF COORDIN. 2, IQ = 50 KA

## Certificates/ approvals:

General Product Approval

For use in  
hazardous  
locations

Declaration of Conformity



EG-Konf.

## Shipping Approval



GL



LRS



RINA



RMRS

other

[other](#)

[Environmental  
Confirmations](#)

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

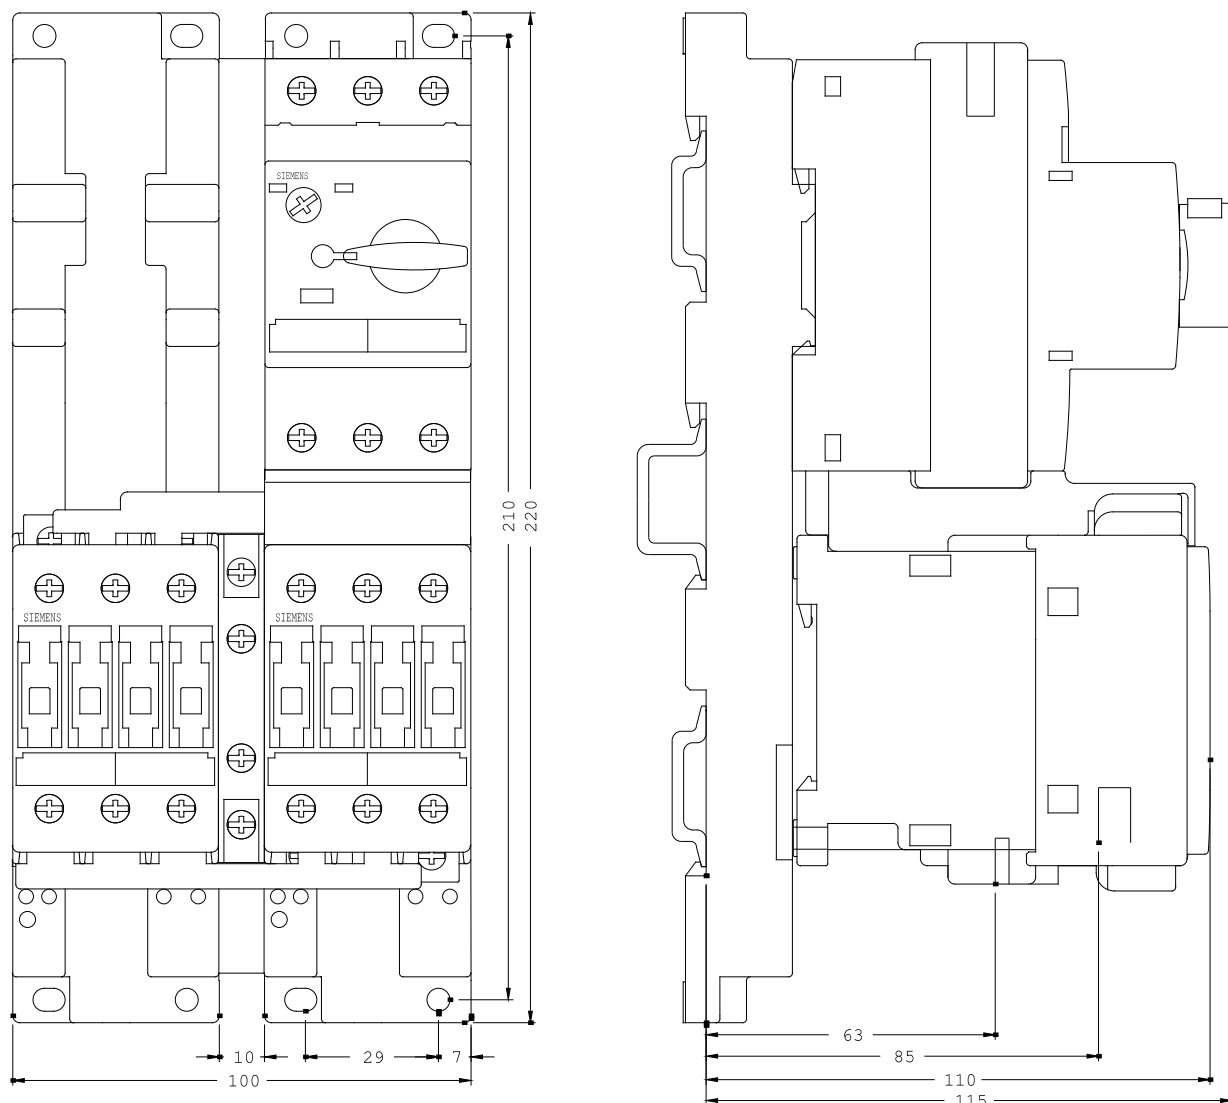

last change: