

FUSELESS LOAD FEEDER REVERSING DUTY,  
400V AC SIZE S00, 0.22...0.32A, 24V DC,  
1NO+ 1NC CIRCUIT-BREAKER 2NO+2NC (CONTACTOR),  
SCREW W. SLIDING ADAPTER CIRCUIT-BREAKER S0

### Certificates/ approvals:

General Product  
Approval

For use in  
hazardous  
locations

Declaration of Conformity



### Shipping Approval



other

[other](#)

[Environmental  
Confirmations](#)

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA1225-0DL16-4BB4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA1225-0DL16-4BB4](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA1225-0DL16-4BB4)

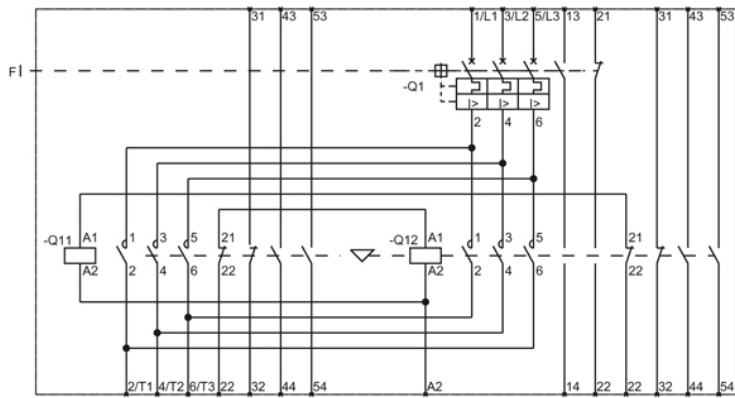

last change: