

FUSELESS FEEDER REVERSING DUTY,
400V AC, SIZE S0, 2.2...3.2A, 24V DC,
1NO+ 1NC CIRCUIT BREAKER 2NO+ 2NC (CONTACT.),
SCREW-T. W. SLIDING ADAPTER+ADD-ON MOD.
CIRCUIT BREAKER S0

Certificates/ approvals:

General Product
Approval

For use in
hazardous
locations

Declaration of Conformity



Shipping Approval



other

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA1225-1DR16-4BB4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA1225-1DR16-4BB4

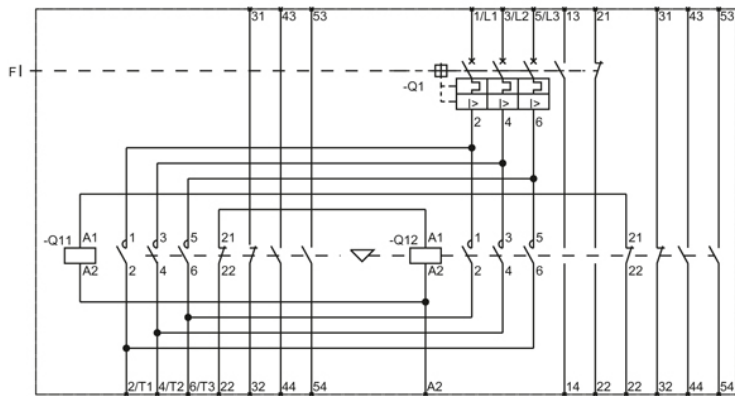

last change: