

REVERSING CONTACTOR ASSEMBLY AC-3,
3KW/400 V, 3-POLE,
SZ. S00 SCREW CONNECTION, AC 48 V,
50/60 HZ, ELECTR. AND MECH. INTERLOCKING



General technical data:

Product function		reversing contactor
Size of the contactor		S00
Width	mm	90
Height	mm	67
Depth	mm	72
Reference code		
• according to DIN EN 61346-2		Q
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K

Control circuit/ Control:

Voltage type / of control feed voltage		AC
Control supply voltage / 1		
• at 50 Hz / for AC		
• rated value	V	48
Control supply voltage frequency		
• 1 / rated value	Hz	50

Main circuit:

Operating current / at AC-3 / at 400 V		
---	--	--

• rated value	A	7
Service power / at AC-3 / at 400 V		
• rated value	kW	3

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts / per direction of rotation		0
Number of NO contacts / for auxiliary contacts / per direction of rotation		0

Connections/ terminals:

Design of the electrical connection / for main current circuit		screw-type terminals
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

Ambient conditions:

Ambient temperature		
• during operating	°C	-25 ... +60
Protection class IP / on the front		IP20

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



[Special Test Certificate](#)

Shipping Approval



Shipping Approval other



[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)



<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA1315-8XB30-1AH0/all>

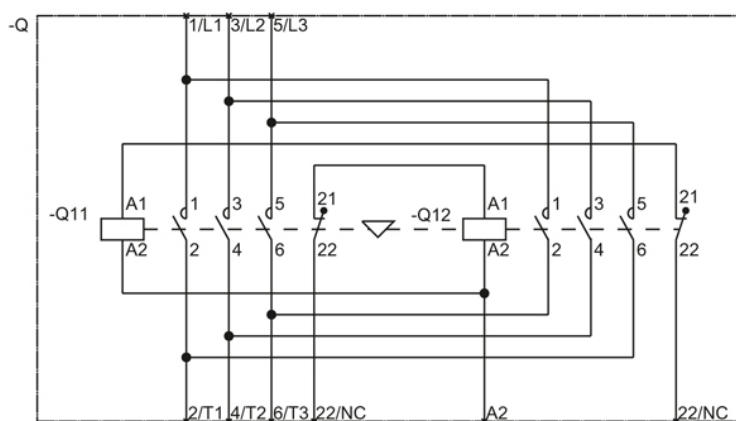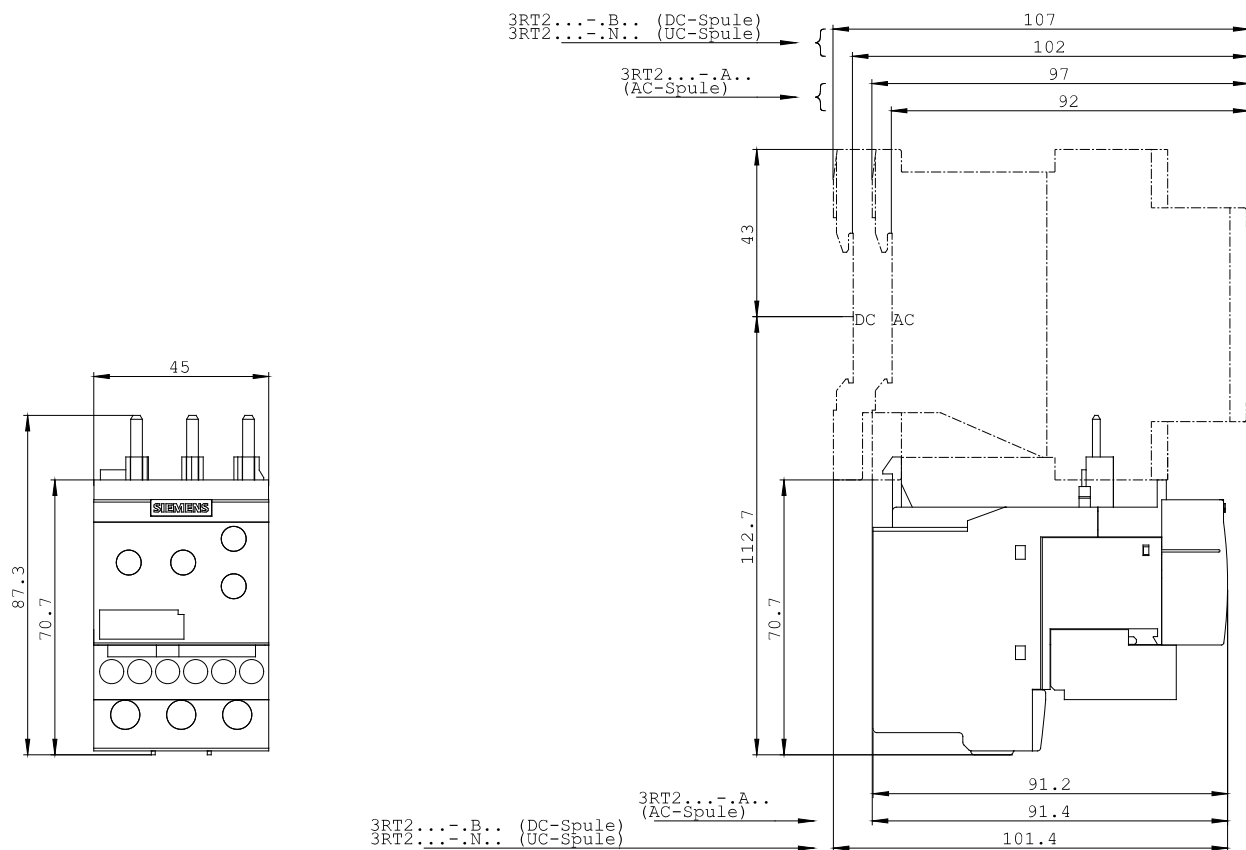

last change:

Jul 28, 2014