



CONTACTOR COMBIN. TO REVERS. AC-3,
3KW/400V,
3-POLE SIZE S00 SCREW CONNECTION,
220 V AC 50 HZ/ 240 V 60 HZ,
ELECTR. AND MECH. LOCKED

General technical data:		
Product function		reversing contactor
Size of the contactor		S00
Width	mm	90
Height	mm	67
Depth	mm	72
Reference code		
• according to DIN EN 61346-2		Q
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K

Control circuit/ Control:		
Voltage type / of control feed voltage		AC
Control supply voltage / 1		
• at 50 Hz / for AC		
• rated value	V	240
• at 60 Hz / for AC		
• rated value	V	240
Control supply voltage frequency		
• 1 / rated value	Hz	60
• 2 / rated value	Hz	60

Main circuit:**Operating current / at AC-3 / at 400 V**

- rated value

A

7

Service power / at AC-3 / at 400 V

- rated value

kW

3

Auxiliary circuit:**Number of NC contacts / for auxiliary contacts / per direction of rotation**

0

Number of NO contacts / for auxiliary contacts / per direction of rotation

0

Connections/ terminals:**Design of the electrical connection / for main current circuit**

screw-type terminals

Mounting type

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

Ambient conditions:**Ambient temperature**

- during operating

°C

-25 ... +60

Protection class IP / on the front

IP20

Certificates/ approvals:**General Product Approval****Declaration of
Conformity****Test Certificates**

CSA



UL



EG-Konf.

[Special Test
Certificate](#)**Shipping Approval**

DNV



GL



LRS



PRS



RINA



Shipping Approval

other



RMRS

[other](#)[Environmental
Confirmations](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>

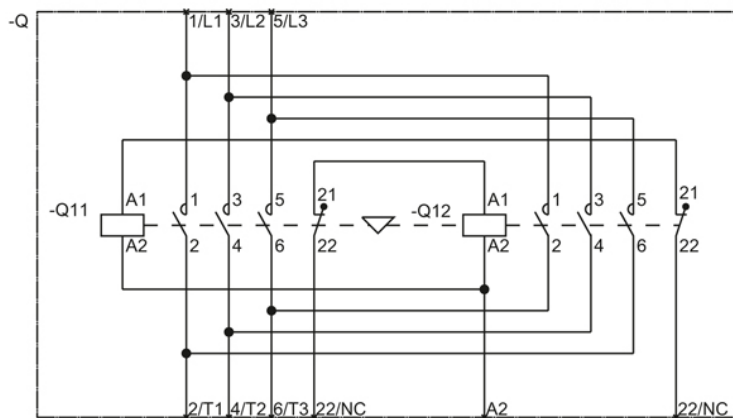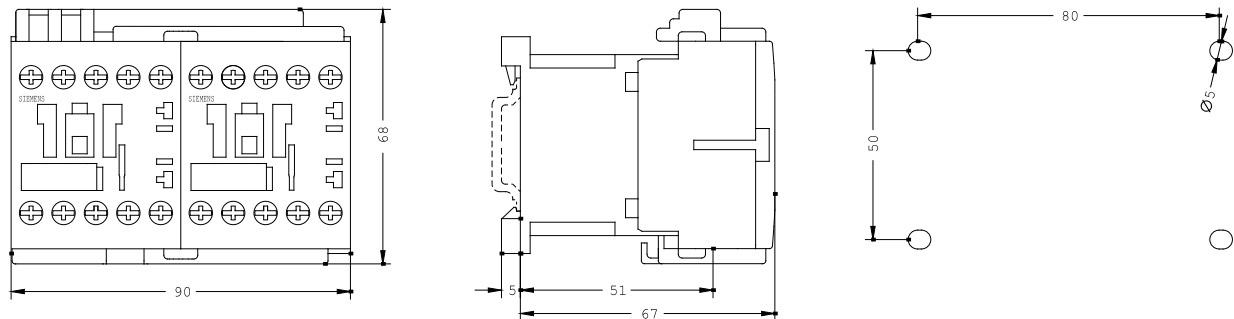

last change:

Jul 7, 2014