



CONTACTOR ASSEMBLY FOR REVERS. AC-3,
4KW/400V, 3-POL.,
FRAME SIZE S00 SCREW TERMINAL,
AC 110V 50HZ/120V 60HZ,
MECH. INTERLOCK WITHOUT ELECT.INTERLOCK NO
INSTEAD OF NC

General technical data:		
Product function		reversing contactor
Size of the contactor		S00
Width	mm	90
Height	mm	67
Depth	mm	72
Reference code		
• according to DIN EN 61346-2		Q
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K

Control circuit/ Control:		
Voltage type / of control feed voltage		AC
Control supply voltage / 1		
• at 50 Hz / for AC		
• rated value	V	120
• for AC / at 60 Hz		
• rated value	V	120
Control supply voltage frequency		
• 1 / rated value	Hz	60
• 2 / rated value	Hz	60

Main circuit:

Operating current / at AC-3 / at 400 V

- rated value

A

9

Service power / at AC-3 / at 400 V

- rated value

kW

4

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts / per direction of rotation

0

Number of NO contacts / for auxiliary contacts / per direction of rotation

1

Connections/ terminals:

Design of the electrical connection / for main current circuit

screw-type terminals

Mounting type

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

Ambient conditions:

Ambient temperature

- during operating

°C

-25 ... +60

Protection class IP / on the front

IP20

Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates



[Special Test Certificate](#)

Shipping Approval



other

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

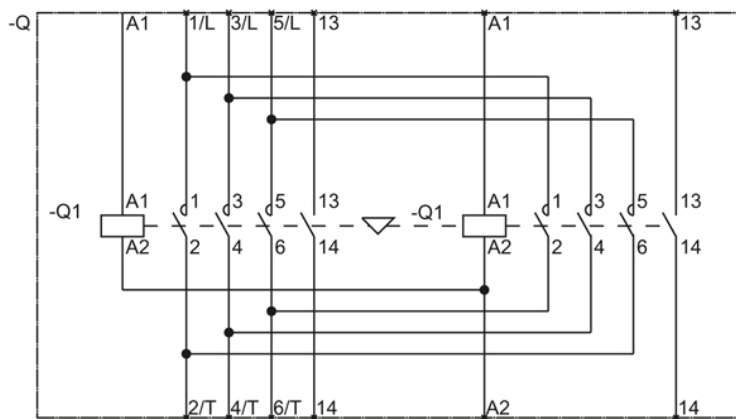

last change:

Aug 4, 2014