



REVERSING CONTACTOR COMBINATION AC-3 4KW/400 V,
3-POLE, SIZES00 SCREW CONNECTION, 1NO,
AC 230 V, 50 HZ,
EL. AND MECH. LOCKING DEVICE REUSABLE PACKING
QUANTITY/PACK = 60 UNITS

General technical data:		
Product function		reversing contactor
Size of the contactor		S00
Width	mm	90
Height	mm	67
Depth	mm	72
Reference code		
• according to DIN EN 61346-2		Q
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K

Control circuit/ Control:		
Voltage type / of control feed voltage		AC
Control supply voltage / 1		
• at 50 Hz / for AC		
• rated value	V	230
• for AC / at 60 Hz		
• rated value	V	230
Control supply voltage frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60

Main circuit:

Operating current / at AC-3 / at 400 V

- rated value

A

9

Service power / at AC-3 / at 400 V

- rated value

kW

4

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts / per direction of rotation

0

Number of NO contacts / for auxiliary contacts / per direction of rotation

0

Connections/ terminals:

Design of the electrical connection / for main current circuit

screw-type terminals

Mounting type

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

Ambient conditions:

Ambient temperature

- during operating

°C

-25 ... +60

Protection class IP / on the front

IP20

Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates



[Special Test Certificate](#)

Shipping Approval



Shipping Approval

other



[other](#)

[Environmental Confirmations](#)



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

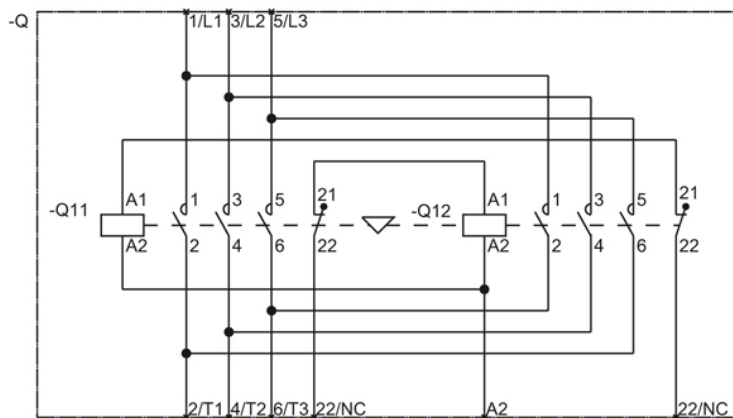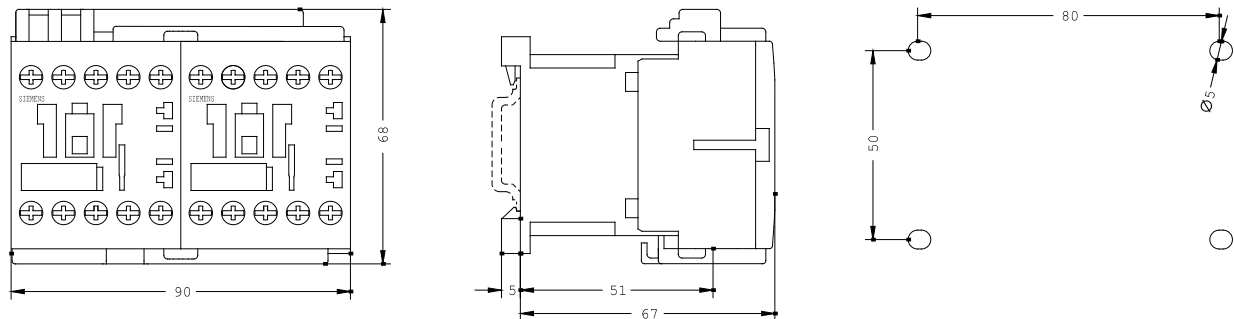

last change:

Aug 4, 2014