

REVERSING CONTACTOR COMBINATION 3PH,
4 kW/400 V, SIZE S0,
125 V DC SCREW TERMINAL

General technical data:

Product function		reversing contactor
Size of the contactor		S0
Width	mm	100
Height	mm	86
Depth	mm	100
Reference code		
• according to DIN EN 61346-2 • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		Q K

Control circuit/ Control:

Voltage type / of control feed voltage		DC
Control supply voltage / 1		
• for DC • rated value	V	125

Main circuit:

Operating current / at AC-3 / at 400 V		
• rated value	A	9
Service power / at AC-3 / at 400 V		
• rated value	kW	4

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts / per direction of rotation		0
Number of NO contacts / for auxiliary contacts / per direction of rotation		0

Connections/ terminals:

Design of the electrical connection / for main current circuit		screw-type terminals
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

Ambient conditions:

Ambient temperature	°C	-25 ... +60
Protection class IP / on the front		IP20

Certificates/ approvals:

General Product Approval



EG-Konf.

Shipping Approval



GL



LRS



PRS



RINA

Shipping Approval

other



RMRS

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA1323-8XB30-1BG4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA1323-8XB30-1BG4

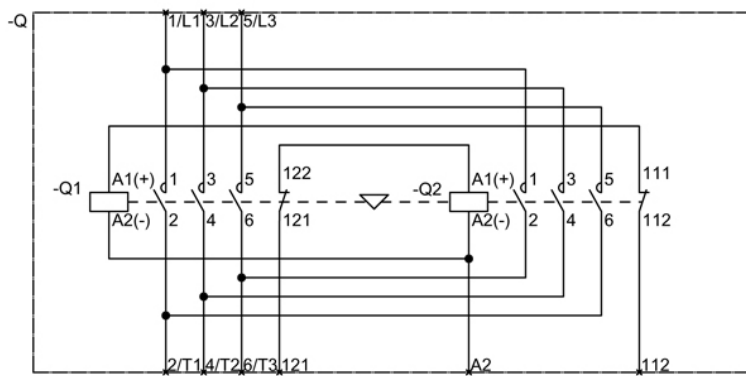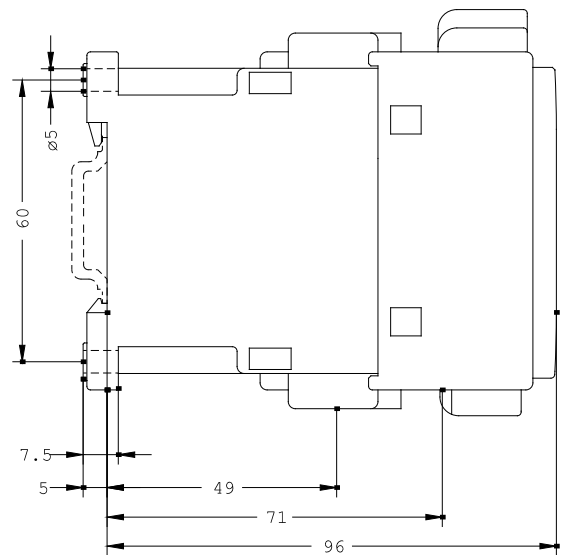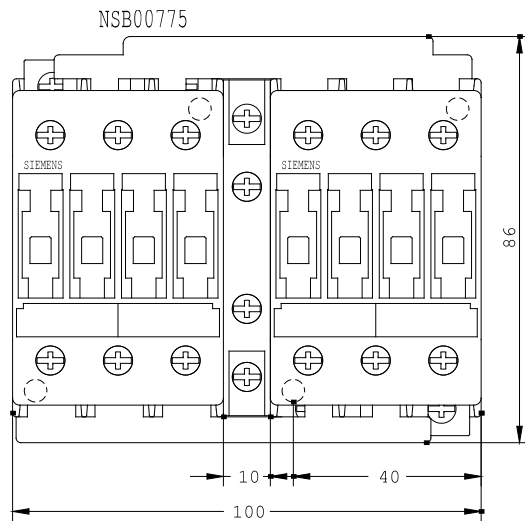

last change:

Jul 28, 2014