



REVERSING CONTACTOR COMBINATION AC-3  
11KW/400V,  
SIZE S0 AC 24V, 50/60HZ

| General technical data:                                                         |    |                     |
|---------------------------------------------------------------------------------|----|---------------------|
| Product function                                                                |    | reversing contactor |
| Size of the contactor                                                           |    | S0                  |
| Width                                                                           | mm | 100                 |
| Height                                                                          | mm | 86                  |
| Depth                                                                           | mm | 91                  |
| Reference code                                                                  |    |                     |
| • according to DIN EN 61346-2                                                   |    | Q                   |
| • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 |    | K                   |

| Control circuit/ Control:              |    |    |
|----------------------------------------|----|----|
| Voltage type / of control feed voltage |    | AC |
| Control supply voltage / 1             |    |    |
| • at 50 Hz / for AC                    |    |    |
| • rated value                          | V  | 24 |
| • at 60 Hz / for AC                    |    |    |
| • rated value                          | V  | 24 |
| Control supply voltage frequency       |    |    |
| • 1 / rated value                      | Hz | 50 |
| • 2 / rated value                      | Hz | 60 |

**Main circuit:****Operating current / at AC-3 / at 400 V**

- rated value

A

25

**Service power / at AC-3 / at 400 V**

- rated value

kW

11

**Auxiliary circuit:****Number of NC contacts / for auxiliary contacts / per direction of rotation**

0

**Number of NO contacts / for auxiliary contacts / per direction of rotation**

0

**Connections/ terminals:****Design of the electrical connection / for main current circuit**

screw-type terminals

**Mounting type**

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

**Ambient conditions:****Ambient temperature**

- during operating




°C

-25 ... +60

**Protection class IP / on the front**

IP20

**Certificates/ approvals:****General Product Approval****Declaration of Conformity****Shipping Approval****Shipping Approval** other
[other](#)
[Environmental Confirmations](#)
**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/industrial-controls/catalogs>
**Industry Mall (Online ordering system)**
<http://www.siemens.com/industrial-controls/mall>
**Cax online generator**
<http://www.siemens.com/cax>

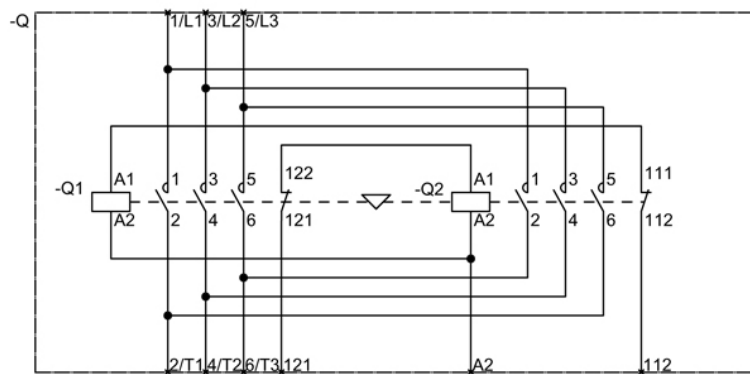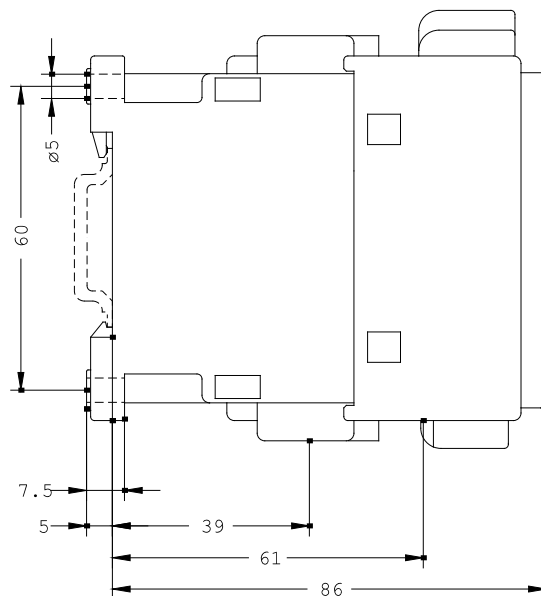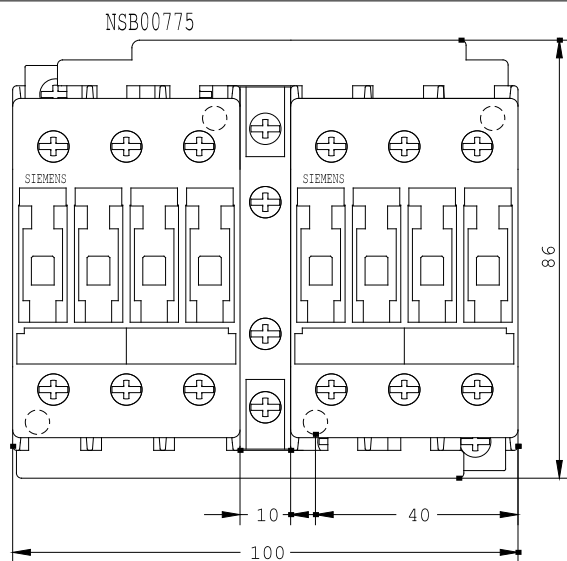

last change:

Jul 7, 2014