



LOAD FEEDER FUSELESS REVERSING DUTY,  
AC 400V, SZ S00, 9. . .12.5A,  
DC 24V SCREW CONNECTION FOR BUSBAR SYSTEMS  
60MM TYPE OF COORDINATION 1,  
IQ = 150KA 1NC (CONTACTOR)

### Allgemeine technische Daten:

|                                                               |    |                             |
|---------------------------------------------------------------|----|-----------------------------|
| product brand name                                            |    | SIRIUS                      |
| Product designation                                           |    | non-fused load feeders 3RA2 |
| Size of the load feeder                                       |    | S00                         |
| Number of poles / for main current circuit                    |    | 3                           |
| Installation altitude / at a height over sea level / maximum  | m  | 2,000                       |
| Product function                                              |    |                             |
| • short circuit protection                                    |    | Yes                         |
| • overload protection                                         |    | Yes                         |
| • phase disturbance recognition                               |    | Yes                         |
| Product component                                             |    |                             |
| • trip indicator                                              |    | No                          |
| • auxiliary switch                                            |    | No                          |
| Product extension / auxiliary switch                          |    | Yes                         |
| Design of display / for switching status                      |    | Switch setting              |
| Insulation voltage / with degree of pollution 3 / rated value | V  | 690                         |
| Impulse voltage resistance / rated value                      | kV | 6                           |
| Protection class IP                                           |    |                             |
| • on the front                                                |    | IP20                        |
| Protection against electrical shock                           |    | finger-safe                 |

|                                                                                                                                                                                                                                                                                                                                                                                                                   |    |                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Shock resistance / according to IEC 60068-2-27</b>                                                                                                                                                                                                                                                                                                                                                             |    | 6g / 11 ms                                                                                                                                                        |
| <b>maximum permissible voltage for safe isolation in networks with non-grounded star point</b>                                                                                                                                                                                                                                                                                                                    |    |                                                                                                                                                                   |
| <b>Ambient temperature</b> <ul style="list-style-type: none"> <li>during transport</li> <li>during storage</li> <li>during operating</li> </ul>                                                                                                                                                                                                                                                                   | °C | -50 ... +80<br>-50 ... 80<br>-20 ... 60                                                                                                                           |
| <b>Manufacturer article number</b> <ul style="list-style-type: none"> <li>of the circuit-breakers included in the scope of supply</li> <li>of the contactor included in the scope of supply</li> <li>of the RS applied assembly kit</li> <li>of the link module included in the scope of supply</li> <li>of the busbar adapter included in the scope of supply</li> <li>of the RH applied assembly kit</li> </ul> |    | <a href="#">3RV2011-1KA10</a><br><a href="#">3RT2017-1BB42</a><br><a href="#">8US1250-5AS10</a><br><a href="#">3RA1921-1DA00</a><br><a href="#">8US1251-5DS10</a> |

| Hauptstromkreis:                                                                                                                                                    |   |                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-------------------------|
| <b>Operating current / rated value</b>                                                                                                                              | A | 16                      |
| <b>Mechanical operating cycles as operating time / of the auxiliary contacts / typical</b>                                                                          |   | 30,000,000              |
| <b>Derating factor for rated value of the operational current</b>                                                                                                   |   |                         |
| <b>Operating voltage / rated value</b>                                                                                                                              | V | 690                     |
| <b>Voltage type / for main circuit</b>                                                                                                                              |   | AC                      |
| <b>Frequency</b>                                                                                                                                                    |   | -                       |
| <b>Service power / at AC-3</b> <ul style="list-style-type: none"> <li>at 400 V / rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> | W | 5,500<br>5,500<br>7,500 |
| <b>Operating current / at AC-3 / at 400 V / rated value</b>                                                                                                         | A | 11.5                    |
| <b>Type of assignment</b>                                                                                                                                           |   | 1                       |

| Steuerstromkreis/ Ansteuerung:                          |   |    |
|---------------------------------------------------------|---|----|
| <b>Voltage type / for auxiliary and control circuit</b> |   | DC |
| <b>Holding power / of the solenoid / for DC</b>         | W | 4  |

| Hilfsstromkreis:                                              |  |   |
|---------------------------------------------------------------|--|---|
| <b>Number of NC contacts / for auxiliary contacts</b>         |  | 1 |
| <b>Number of NO contacts / for auxiliary contacts</b>         |  | 0 |
| <b>Number of changeover contacts / for auxiliary contacts</b> |  | 0 |

| Schutz-/Überwachungsfunktion:                 |  |                      |
|-----------------------------------------------|--|----------------------|
| <b>Design of the overload circuit breaker</b> |  | thermal (bimetallic) |
| <b>Trip class</b>                             |  | CLASS 10             |

|                                                                                                                                                                                                                                                                                               |        |                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------------------|
| <b>Adjustable response current / of the current-dependent overload release</b>                                                                                                                                                                                                                | A      | 9 ... 12.5                 |
| <b>Design of the short-circuit trip</b>                                                                                                                                                                                                                                                       |        | magnetic                   |
| <b>Conditional short-circuit current (I<sub>q</sub>)</b><br><ul style="list-style-type: none"> <li>• at 400 V / according to IEC 60947-4-1 / rated value</li> <li>• at 500 V / according to IEC 60947-4-1 / rated value</li> <li>• at 690 V according to IEC 60947-4-1 rated value</li> </ul> | A<br>A | 153,000<br>42,000<br>4,000 |
| <b>Varification of suitability / ATEX</b>                                                                                                                                                                                                                                                     |        | Yes                        |

#### Sicherheitsrelevante Kenngrößen:

|                                                                                                                                              |   |           |
|----------------------------------------------------------------------------------------------------------------------------------------------|---|-----------|
| <b>Proportion of dangerous failures</b><br><ul style="list-style-type: none"> <li>• with high demand rate / according to SN 31920</li> </ul> | % | 73        |
| <b>B10 value / with high demand rate / according to SN 31920</b>                                                                             |   | 1,000,000 |

#### Einbau/ Befestigung/ Abmessungen:

|                                                                                                                                                                                                           |          |                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------------------------------------|
| <b>Mounting type</b>                                                                                                                                                                                      |          | for snapping onto 60 mm busbar systems |
| <b>mounting position</b>                                                                                                                                                                                  |          | vertical                               |
| <b>Depth</b>                                                                                                                                                                                              | mm       | 155.1                                  |
| <b>Height</b>                                                                                                                                                                                             | mm       | 200                                    |
| <b>Width</b>                                                                                                                                                                                              | mm       | 90                                     |
| <b>Distance, to be maintained, to the ranks assembly</b><br><ul style="list-style-type: none"> <li>• upwards</li> <li>• forwards</li> <li>• sideways</li> <li>• backwards</li> <li>• downwards</li> </ul> | mm<br>mm | 20<br>0<br>0<br>0<br>30                |

#### Anschlüsse/ Klemmen:

|                                                                                                                                                                                                                               |  |                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------|
| <b>Arrangement of electrical connectors / for main current circuit</b>                                                                                                                                                        |  | from the top                                                                               |
| <b>Design of the electrical connection</b><br><ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>                                               |  | screw-type terminals<br>screw-type terminals                                               |
| <b>Type of the connectable conductor cross-section for main contacts</b><br><ul style="list-style-type: none"> <li>• solid or multi-stranded</li> <li>• finely stranded</li> <li>• with conductor end processing</li> </ul>   |  | 2x (0,75 ... 2,5 mm²), 2x 4 mm²<br>2x (0.5 ... 2.5 mm²)                                    |
| <b>Type of connectable conductor cross-sections for auxiliary contacts</b><br><ul style="list-style-type: none"> <li>• solid or multi-stranded</li> <li>• finely stranded</li> <li>• with conductor end processing</li> </ul> |  | 2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²)<br>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) |

|                                                                                       |     |                                |
|---------------------------------------------------------------------------------------|-----|--------------------------------|
| <b>Type of the connectable conductor cross-section / for AWG conductors</b>           |     |                                |
| • for main contacts                                                                   |     | 2x (18 ... 14), 2x 12          |
| • for auxiliary contacts                                                              |     | 2x (20 ... 16), 2x (18 ... 14) |
| <b>Tightening torque / for main contacts</b>                                          |     |                                |
| • with screw-type terminals                                                           | N·m | 0.8 ... 1.2                    |
| <b>Design of the thread of the connection screw for main contacts</b>                 |     |                                |
| M3                                                                                    | M3  |                                |
| <b>Tightening torque / for auxiliary contacts</b>                                     |     |                                |
| • with screw-type terminals                                                           | N·m | 0.8 ... 1.2                    |
| <b>Design of the thread of the connection screw of the auxiliary and control pins</b> |     |                                |
| M3                                                                                    | M3  |                                |
| <b>Dimension de la tête de tournevis</b>                                              |     | Pozidriv 2                     |

#### UL/CSA Bemessungsdaten:

|                                                                                   |    |     |
|-----------------------------------------------------------------------------------|----|-----|
| <b>yielded mechanical performance [hp] / for three-phase squirrel cage motors</b> |    |     |
| • at 200/208 V / rated value                                                      | hp | 3   |
| • at 220/230 V / rated value                                                      | hp | 3   |
| • at 460/480 V rated value                                                        |    | 7.5 |
| • at 575/600 V rated value                                                        |    | 10  |
| <b>Full-load current (FLA) / for 3-phase motor</b>                                |    |     |
| • at 480 V / rated value                                                          | A  | 11  |

#### Approbationen/ Zertifikate:

| General Product Approval                                                                   | For use in hazardous locations                                                              | Declaration of Conformity                                                                         |
|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <br>CSA | <br>ATEX | <br>EG-Konf. |
|         | <br>UL   |                                                                                                   |

#### Test Certificates

[Special Test Certificate](#)     
 [Type Test Certificates/Test Report](#)

#### Shipping Approval



#### other

[Declaration of Conformity](#)     
 [other](#)     
 [Environmental Confirmations](#)

#### Weitere Informationen:

##### Information- and Downloadcenter (Kataloge, Broschüren,...)

<http://www.siemens.de/industrial-controls/catalogs>

##### Industry Mall (Online-Bestellsystem)

<http://www.siemens.de/industrial-controls/mall>

##### CAX-Online-Generator



<http://www.siemens.com/cax>


##### Service&Support (Handbücher, Betriebsanleitungen, Zertifikate, Kennlinien, FAQs,...)

<http://support.automation.siemens.com/WW/view/de/3RA2210-1KD17-2BB4/all>

##### Bilddatenbank (Produktfotos, 2D-Maßzeichnungen, 3D-Modelle, Geräteschaltpläne, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA2210-1KD17-2BB4](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2210-1KD17-2BB4)

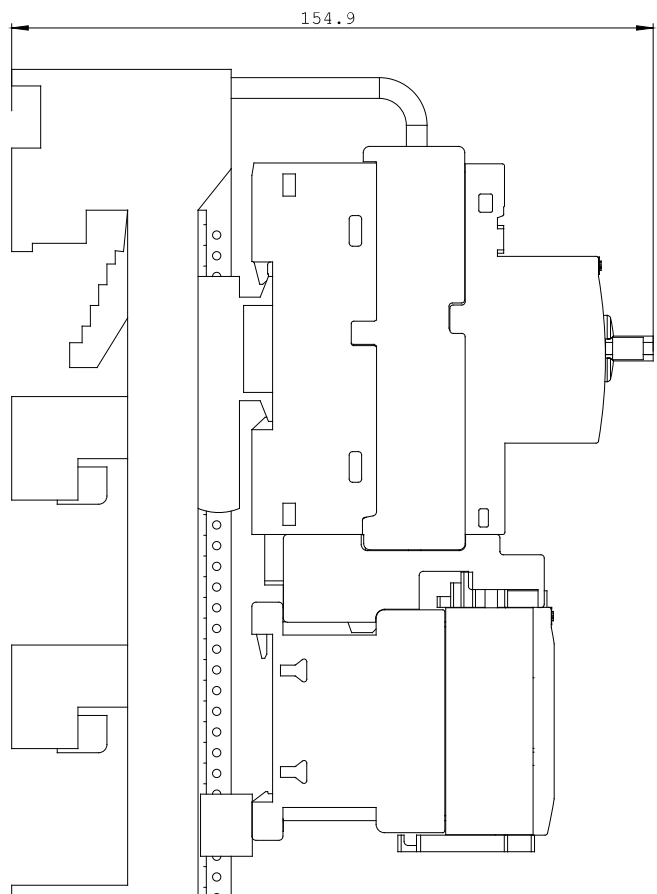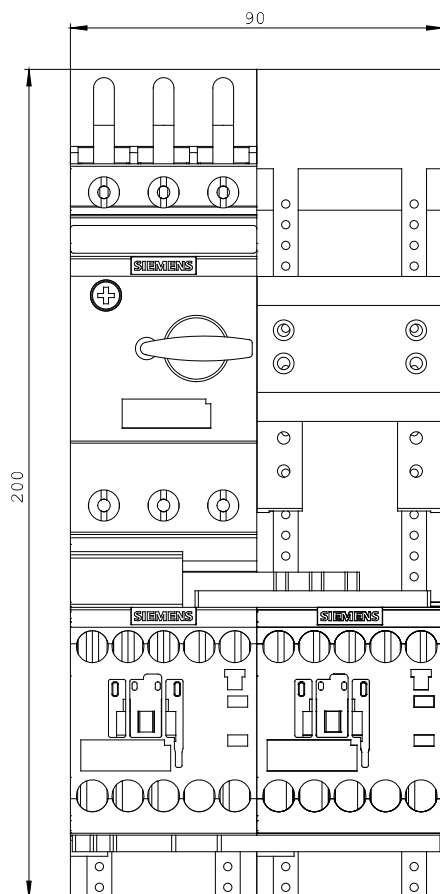

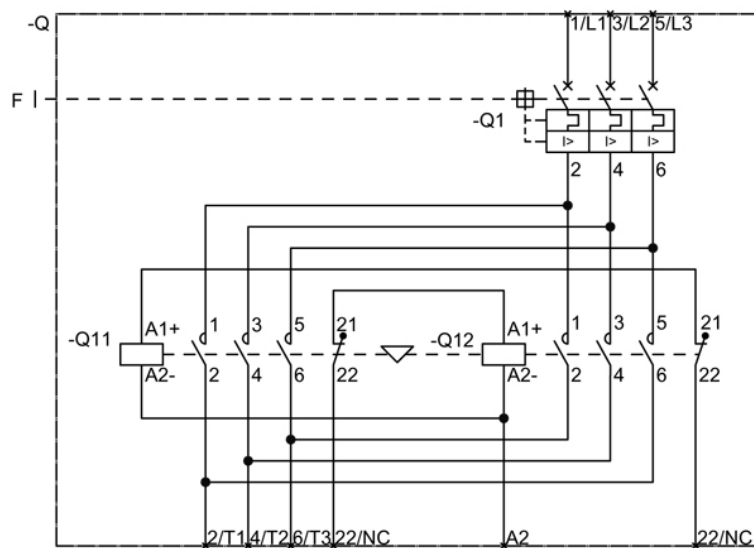

letzte Änderung:

Jul 28, 2014