

LOAD FEEDER FUSE SW. REVERSING OPERATION,
AC 400V, MDL. S0, 5.5. . .8A,
AC 230V SPRING-LOADED TERMINAL FOR STANDARD
RAIL MOUNTING WITH MOUNTING RAIL ADAPTER
COORDINATION TYPE 2,IQ = 150KA (ALSO COMPLIES
WITH COORDINATION TYPE 1) 1NO+1NC (CONTACTOR)

Allgemeine technische Daten:

product brand name		SIRIUS
Product designation		non-fused load feeders 3RA2
Size of the load feeder		S0
Number of poles / for main current circuit		3
Installation altitude / at a height over sea level / maximum	m	2,000
Product function • short circuit protection • overload protection • phase disturbance recognition		Yes Yes Yes
Product component • trip indicator • auxiliary switch		No No
Product extension / auxiliary switch		Yes
Design of display / for switching status		Switch setting
Insulation voltage / with degree of pollution 3 / rated value	V	690
Impulse voltage resistance / rated value	kV	6
Protection class IP • on the front		IP20
Protection against electrical shock		finger-safe
Shock resistance / according to IEC 60068-2-27		6g / 11 ms
maximum permissible voltage for safe isolation in networks with non-grounded star point		
Ambient temperature • during transport • during storage • during operating	°C	-50 ... +80 -50 ... 80 -20 ... 60
Manufacturer article number • of the standard mounting rail adapter included in the scope of supply		3RA2922-1AA00

- of the circuit-breakers included in the scope of supply
- of the contactor included in the scope of supply
- of the RS applied assembly kit
- of the link module included in the scope of supply
- of the busbar adapter included in the scope of supply
- of the RH applied assembly kit

[3RV2021-1HA20](#)
[3RT2024-2AP00](#)
[3RA2921-2AA00](#)
[3RA2923-1BB2](#)

Hauptstromkreis:

Operating current / rated value	A	32
Mechanical operating cycles as operating time / of the auxiliary contacts / typical		10,000,000
Derating factor for rated value of the operational current		
Operating voltage / rated value	V	690
Voltage type / for main circuit		AC
Frequency		-
Service power / at AC-3 • at 400 V / rated value • at 500 V rated value • at 690 V rated value	W	3,000 4,000 5,500
Operating current / at AC-3 / at 400 V / rated value	A	6.5
Type of assignment		2

Steuerstromkreis/ Ansteuerung:

Voltage type / for auxiliary and control circuit		AC
Apparent holding power / of the solenoid / for AC	V·A	8.5

Hilfsstromkreis:

Number of NC contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts		1
Number of changeover contacts / for auxiliary contacts		0

Schutz-/Überwachungsfunktion:

Design of the overload circuit breaker		thermal (bimetallic)
Trip class		CLASS 10
Adjustable response current / of the current-dependent overload release	A	5.5 ... 8
Design of the short-circuit trip		magnetic
Conditional short-circuit current (I _q) • at 400 V / according to IEC 60947-4-1 / rated value • at 690 V according to IEC 60947-4-1 rated value	A	153,000 -
Varification of suitability / ATEX		Yes

Sicherheitsrelevante Kenngrößen:**Proportion of dangerous failures**

- with high demand rate / according to SN 31920

%

73

B10 value / with high demand rate / according to SN 31920

1,000,000

Einbau/ Befestigung/ Abmessungen:**Mounting type**

On adapter for screw and snap-on mounting on 35 mm standard mounting rail

mounting position

vertical

Depth

mm

120.3

Height

mm

265

Width

mm

90

Distance, to be maintained, to the ranks assembly

- upwards
- forwards
- sideways
- backwards
- downwards

mm

30

mm

10

0

0

30

Anschlüsse/ Klemmen:**Arrangement of electrical connectors / for main current circuit**

from front

Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

spring-loaded terminals

spring-loaded terminals

Type of the connectable conductor cross-section for main contacts

- solid or multi-stranded
- finely stranded
 - with conductor end processing
 - without conductor final cutting

2x (1 ... 10 mm²)2x (1 ... 6 mm²)2x (1 ... 6 mm²)**Type of connectable conductor cross-sections for auxiliary contacts**

- solid or multi-stranded
- finely stranded
 - with conductor end processing
 - without conductor final cutting

2x (0,5 ... 4 mm²)2x (0.5 ... 2.5 mm²)2x (0.5 ... 2.5 mm²)**Type of the connectable conductor cross-section / for AWG conductors**

- for main contacts
- for auxiliary contacts

2x (18 ... 8)

2x (20 ... 16), 2x (18 ... 14)

Design of the thread of the connection screw for main contacts

Design of the thread of the connection screw of the auxiliary and control pins

UL/CSA Bemessungsdaten:

yielded mechanical performance [hp] / for three-phase squirrel cage motors

- at 220/230 V / rated value
- at 460/480 V rated value
- at 575/600 V rated value

hp	2
	5
	5

Full-load current (FLA) / for 3-phase motor

- at 480 V / rated value

A	8
---	---

Approbationen/ Zertifikate:

General Product Approval

For use in hazardous locations

Declaration of Conformity

Test Certificates



[Type Test Certificates/Test Report](#)

Shipping Approval

other



[other](#)

[Environmental Confirmations](#)

Weitere Informationen:

Information- and Downloadcenter (Kataloge, Broschüren,...)

<http://www.siemens.de/industrial-controls/catalogs>

Industry Mall (Online-Bestellsystem)

<http://www.siemens.de/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Handbücher, Betriebsanleitungen, Zertifikate, Kennlinien, FAQs,...)

<http://support.automation.siemens.com/WW/view/de/3RA2220-1HF24-0AP0/all>

Bilddatenbank (Produktfotos, 2D-Maßzeichnungen, 3D-Modelle, Geräteschaltpläne, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2220-1HF24-0AP0

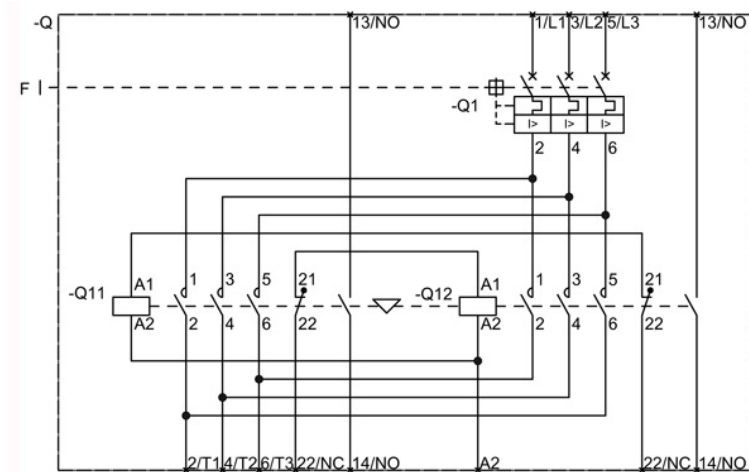

letzte Änderung:

Jul 28, 2014