

STAR-DELTA COMB. AC3, 11KW/400V AC230V,  
50/60HZ, 3-POLE SZ S0,  
SCREW TERMINAL ELECTR. AND MECH. INTERLOCK  
3NO+3NC INTEGR.



### General technical data:

|                                                                                                                                                                                  |    |                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------------------------------------------------|
| product brand name                                                                                                                                                               |    | SIRIUS                                          |
| product designation                                                                                                                                                              |    | star-delta (wye-delta) contactor assembly 3RA24 |
| Product function                                                                                                                                                                 |    | wye-delta motor start-up                        |
| Size of the contactor                                                                                                                                                            |    | S0                                              |
| Protection class IP / on the front                                                                                                                                               |    | IP20                                            |
| Degree of pollution                                                                                                                                                              |    | 3                                               |
| Insulation voltage / with degree of pollution 3 / rated value                                                                                                                    | V  | 690                                             |
| Installation altitude / at a height over sea level / maximum                                                                                                                     | m  | 2,000                                           |
| Ambient temperature <ul style="list-style-type: none"> <li>during transport</li> <li>during storage</li> <li>during operating</li> </ul>                                         | °C | -55 ... +80<br>-55 ... +80<br>-25 ... +60       |
| Resistance against shock                                                                                                                                                         |    | 12.5g / 5 ms and 7.8g / 10 ms                   |
| Impulse voltage resistance / rated value                                                                                                                                         | kV | 6                                               |
| Active power loss / per conductor / typical                                                                                                                                      | W  | 0.4                                             |
| Item designation <ul style="list-style-type: none"> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> <li>according to DIN EN 61346-2</li> </ul> |    | K<br>Q                                          |

|                                                                                     |  |                               |
|-------------------------------------------------------------------------------------|--|-------------------------------|
| <b>Manufacturer article number</b>                                                  |  |                               |
| • of the function module for for wye-delta circuits included in the scope of supply |  | <a href="#">3RA2816-0EW20</a> |
| • 1 / of the contactor included in the scope of supply                              |  | <a href="#">3RT2024-1AL20</a> |
| • 2 / of the contactor included in the scope of supply                              |  | <a href="#">3RT2024-1AL20</a> |
| • 3 / of the contactor included in the scope of supply                              |  | <a href="#">3RT2024-1AL20</a> |
| • of the RS applied assembly kit                                                    |  | <a href="#">3RA2923-2BB1</a>  |
| <b>Mechanical operating cycles as operating time</b>                                |  |                               |
| • of the main contacts / typical                                                    |  | 10,000,000                    |
| • of the auxiliary contacts / typical                                               |  | 10,000,000                    |
| • of the contactor / typical                                                        |  | 10,000,000                    |
| • of the contactor with added auxiliary switch block / typical                      |  | 10,000,000                    |

#### Communication:

|                                                             |  |    |
|-------------------------------------------------------------|--|----|
| <b>Product function</b>                                     |  |    |
| • bus-communication                                         |  | No |
| • control circuit interface with IO link                    |  | No |
| <b>Protocol / will be supported / AS interface protocol</b> |  | No |

#### Main circuit:

|                                                            |   |     |
|------------------------------------------------------------|---|-----|
| <b>Number of poles / for main current circuit</b>          |   | 3   |
| <b>Number of NC contacts / for main contacts</b>           |   | 0   |
| <b>Number of NO contacts / for main contacts</b>           |   | 3   |
| <b>Operating voltage / at AC-3 / rated value / maximum</b> | V | 690 |
| <b>Operational current</b>                                 |   |     |
| • at AC-1 / at 400 V                                       |   |     |
| • at 40 °C ambient temperature / rated value               | A | 40  |
| • at 60 °C ambient temperature / rated value               | A | 35  |
| • at AC-2 / at 400 V / rated value                         | A | 25  |
| • at AC-3 / at 400 V / rated value                         | A | 17  |
| • with 1 current path / at DC-1                            |   |     |
| • at 24 V / rated value                                    | A | 35  |
| • at 110 V / rated value                                   | A | 4.5 |
| • with 2 current paths in series / at DC-1                 |   |     |
| • at 24 V / rated value                                    | A | 35  |
| • at 110 V / rated value                                   | A | 35  |
| • with 3 current paths in series / at DC-1                 |   |     |
| • at 24 V / rated value                                    | A | 35  |
| • at 110 V / rated value                                   | A | 35  |
| • with 1 current path / at DC-3 / at DC-5                  |   |     |
| • at 24 V / rated value                                    | A | 20  |

|                                                                                                        |     |       |
|--------------------------------------------------------------------------------------------------------|-----|-------|
| <ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>                             | A   | 2.5   |
| <ul style="list-style-type: none"> <li>• with 2 current paths in series / at DC-3 / at DC-5</li> </ul> |     |       |
| <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul>                              | A   | 35    |
| <ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>                             | A   | 15    |
| <ul style="list-style-type: none"> <li>• with 3 current paths in series / at DC-3 / at DC-5</li> </ul> |     |       |
| <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul>                              | A   | 35    |
| <ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>                             | A   | 35    |
| <b>Service power</b>                                                                                   |     |       |
| <ul style="list-style-type: none"> <li>• at AC-2 / at 400 V / rated value</li> </ul>                   | kW  | 11    |
| <ul style="list-style-type: none"> <li>• at AC-3</li> </ul>                                            |     |       |
| <ul style="list-style-type: none"> <li>• at 400 V / rated value</li> </ul>                             | kW  | 11    |
| <ul style="list-style-type: none"> <li>• at 500 V / rated value</li> </ul>                             | kW  | 11    |
| <ul style="list-style-type: none"> <li>• at 690 V / rated value</li> </ul>                             | kW  | 19    |
| <ul style="list-style-type: none"> <li>• at AC-4 / at 400 V / rated value</li> </ul>                   | kW  | 2     |
| <b>Off-load operating frequency</b>                                                                    | 1/h | 15    |
| <b>Frequency of operation</b>                                                                          |     |       |
| <ul style="list-style-type: none"> <li>• at AC-1 / according to IEC 60947-6-2 / maximum</li> </ul>     | 1/h | 1,000 |
| <ul style="list-style-type: none"> <li>• at AC-2 / according to IEC 60947-6-2 / maximum</li> </ul>     | 1/h | 1,000 |
| <ul style="list-style-type: none"> <li>• at AC-3 / according to IEC 60947-6-2 / maximum</li> </ul>     | 1/h | 1,000 |
| <ul style="list-style-type: none"> <li>• at AC-4 / according to IEC 60947-6-2 / maximum</li> </ul>     | 1/h | 300   |

#### Control circuit:

|                                                                                        |     |              |
|----------------------------------------------------------------------------------------|-----|--------------|
| <b>Design of activation</b>                                                            |     | conventional |
| <b>Type of voltage / of the controlled supply voltage</b>                              |     | AC           |
| <b>Control supply voltage frequency</b>                                                |     |              |
| <ul style="list-style-type: none"> <li>• 1 / rated value</li> </ul>                    | Hz  | 50           |
| <ul style="list-style-type: none"> <li>• 2 / rated value</li> </ul>                    | Hz  | 60           |
| <b>Control supply voltage / 1</b>                                                      |     |              |
| <ul style="list-style-type: none"> <li>• at 50 Hz / for AC / rated value</li> </ul>    | V   | 230          |
| <ul style="list-style-type: none"> <li>• at 60 Hz / for AC / rated value</li> </ul>    | V   | 230          |
| <b>Operating range factor control supply voltage rated value / of the magnet coil</b>  |     |              |
| <ul style="list-style-type: none"> <li>• at 50 Hz / for AC</li> </ul>                  |     | 0.8 ... 1.1  |
| <ul style="list-style-type: none"> <li>• at 60 Hz / for AC</li> </ul>                  |     | 0.8 ... 1.1  |
| <b>Apparent pull-in power / of the solenoid / for AC</b>                               | V·A | 65           |
| <b>Apparent holding power / of the solenoid / for AC</b>                               | V·A | 8.5          |
| <b>Inductive power factor</b>                                                          |     |              |
| <ul style="list-style-type: none"> <li>• with the pull-in power of the coil</li> </ul> |     | 0.82         |
| <ul style="list-style-type: none"> <li>• with the pull-in power of the coil</li> </ul> |     | 0.25         |

#### Auxiliary circuit:

|                                                        |   |                                            |
|--------------------------------------------------------|---|--------------------------------------------|
| <b>Product extension / auxiliary switch</b>            |   | No                                         |
| <b>Contact reliability / of the auxiliary contacts</b> |   | < 1 error per 100 million operating cycles |
| <b>Number of NC contacts / for auxiliary contacts</b>  |   |                                            |
| • instantaneous switching                              |   | 3                                          |
| • lagging switching                                    |   | 0                                          |
| <b>Number of NO contacts / for auxiliary contacts</b>  |   |                                            |
| • instantaneous switching                              |   | 3                                          |
| • leading switching                                    |   | 0                                          |
| <b>Operating current / of the auxiliary contacts</b>   |   |                                            |
| • at AC-12 / maximum                                   | A | 10                                         |
| • at AC-15                                             |   |                                            |
| • at 230 V                                             | A | 6                                          |
| • at 400 V                                             | A | 3                                          |
| • at DC-12                                             |   |                                            |
| • at 48 V                                              | A | 6                                          |
| • at 60 V                                              | A | 6                                          |
| • at 110 V                                             | A | 3                                          |
| • at 220 V                                             | A | 1                                          |
| • at DC-13                                             |   |                                            |
| • at 24 V                                              | A | 10                                         |
| • at 48 V                                              | A | 2                                          |
| • at 60 V                                              | A | 2                                          |
| • at 110 V                                             | A | 1                                          |
| • at 220 V                                             | A | 0.3                                        |

#### Short-circuit:

##### Design of the fuse link

- for short-circuit protection of the main circuit
- with type of assignment 1 / required
- at type of coordination 2 / required
- for short-circuit protection of the auxiliary switch / required

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 63 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 25 A

fuse gL/gG: 10 A

#### Installation/mounting/dimensions:

|                          |    |                                                              |
|--------------------------|----|--------------------------------------------------------------|
| <b>mounting position</b> |    | any                                                          |
| <b>Type of mounting</b>  |    | screw and snap-on mounting onto 35 mm standard mounting rail |
| <b>Width</b>             | mm | 135                                                          |
| <b>Height</b>            | mm | 101                                                          |
| <b>Depth</b>             | mm | 171                                                          |

|                                                          |    |   |
|----------------------------------------------------------|----|---|
| <b>Distance, to be maintained, to the ranks assembly</b> |    |   |
| • forwards                                               | mm | 6 |
| • backwards                                              | mm | 0 |
| • upwards                                                | mm | 6 |
| • downwards                                              | mm | 6 |
| • sideways                                               | mm | 6 |
| <b>Distance, to be maintained, to earthed part</b>       |    |   |
| • forwards                                               | mm | 6 |
| • backwards                                              | mm | 0 |
| • upwards                                                | mm | 6 |
| • downwards                                              | mm | 6 |
| • sideways                                               | mm | 6 |
| <b>Distance, to be maintained, conductive elements</b>   |    |   |
| • forwards                                               | mm | 6 |
| • backwards                                              | mm | 0 |
| • upwards                                                | mm | 6 |
| • downwards                                              | mm | 6 |
| • sideways                                               | mm | 6 |

#### Connections:

|                                                        |  |                                                                                         |
|--------------------------------------------------------|--|-----------------------------------------------------------------------------------------|
| <b>Design of the electrical connection</b>             |  |                                                                                         |
| • for main current circuit                             |  | screw-type terminals                                                                    |
| • for auxiliary and control current circuit            |  | screw-type terminals                                                                    |
| <b>Type of the connectable conductor cross-section</b> |  |                                                                                         |
| • for main contacts                                    |  |                                                                                         |
| • solid                                                |  | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )                       |
| • stranded                                             |  | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )                       |
| • finely stranded                                      |  |                                                                                         |
| • with conductor end processing                        |  | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> |
| • for AWG conductors / for main contacts               |  | 2x (16 ... 12), 2x (14 ... 8)                                                           |
| • for auxiliary contacts                               |  |                                                                                         |
| • solid                                                |  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )                   |
| • finely stranded                                      |  |                                                                                         |
| • with conductor end processing                        |  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )                   |
| • for AWG conductors / for auxiliary contacts          |  | 2x (20 ... 16), 2x (18 ... 14)                                                          |

#### Certificates/approvals:

|                                    |  |                     |
|------------------------------------|--|---------------------|
| <b>Verification of suitability</b> |  | CE / UL / CSA / CCC |
|------------------------------------|--|---------------------|

| General Product Approval                                                                  | Declaration of Conformity                                                                     | Test Certificates                        |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------|
| <br>GOST | <br>EG-Konf. | <a href="#">Special Test Certificate</a> |

#### Shipping Approval



#### Shipping Approval

other



[other](#)

#### UL/CSA ratings

Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

#### Safety:

**B10 value / with high demand rate**

- according to SN 31920

1,000,000

**Failure rate (FIT value) / with low demand rate**

- according to SN 31920

FIT

100

**Proportion of dangerous failures**

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

40

%

75

**T1 value / for proof test interval or service life**

- according to IEC 61508

a

20

**Protection against electrical shock**

finger-safe

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**CAX-Online-Generator**




<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RA2423-8XF32-1AL2/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA2423-8XF32-1AL2](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2423-8XF32-1AL2)

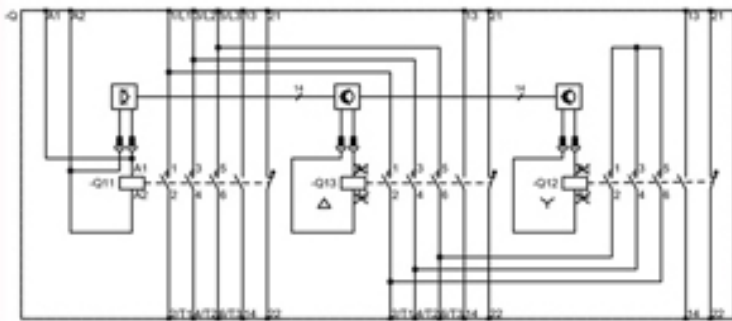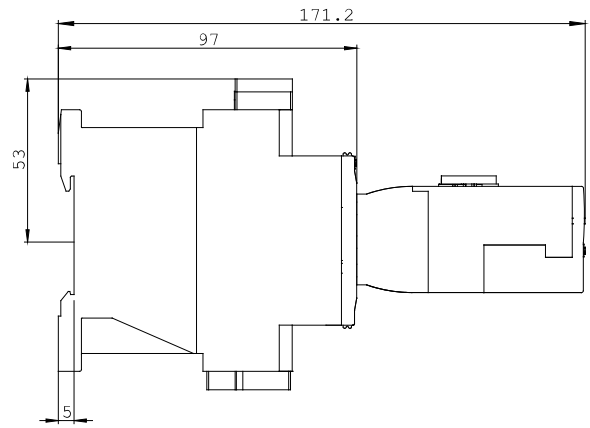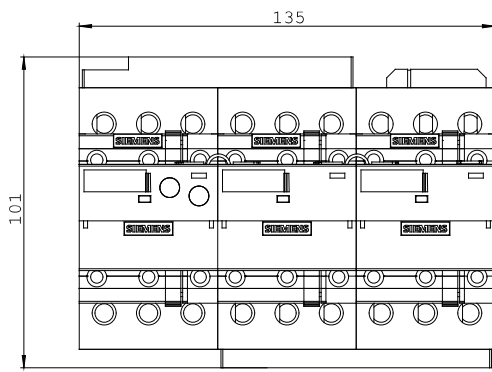

last change:

Feb 4, 2013