


3-PHASE FEEDER TERMINAL FOR 3RT201.
CONTACTOR,
SIZE S00

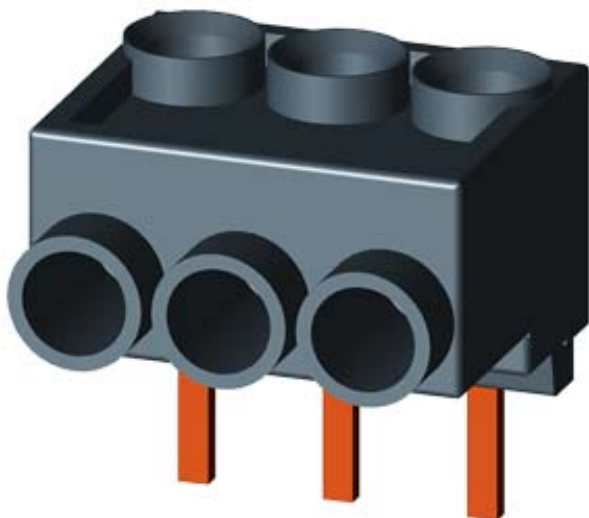

General technical data:

product brand name		SIRIUS
Product designation		3-phase infeed terminals
Size of the contactor		S00
Protection class IP / on the front		IP20
Ambient temperature		
• during storage	°C	-50 ... +80
• during operating	°C	-40 ... +60
Insulation voltage / with degree of pollution 3		
• rated value	V	690

Installation/mounting/dimensions:

Width	mm	25.9
Height	mm	30.4
Depth	mm	28.4

Connections:

Design of the electrical connection		
• for main current circuit		screw-type terminals with box terminals

Certificates/approvals:

Verification of suitability

CE / UL / CSA / CCC

General Product Approval

Declaration of Conformity

Test Certificates



[Special Test Certificate](#)

Shipping Approval



Shipping Approval

other



[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2913-3K/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2913-3K

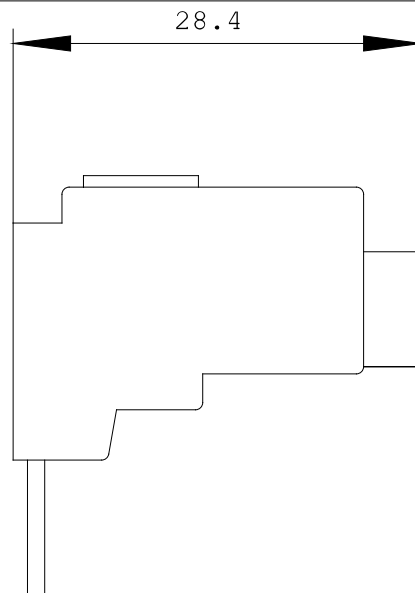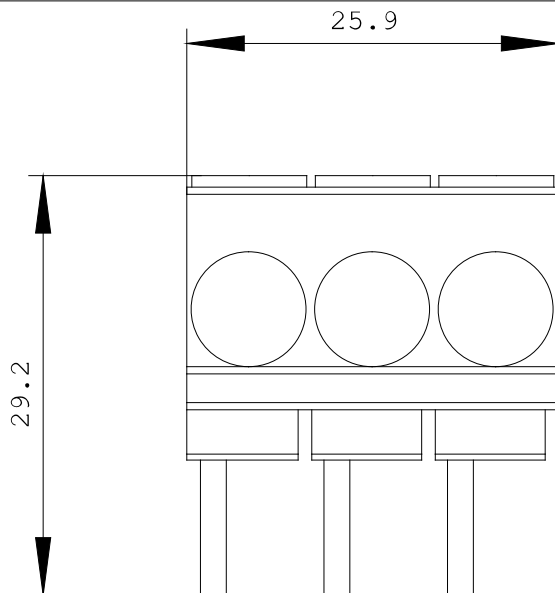

last change:

Mar 17, 2014