


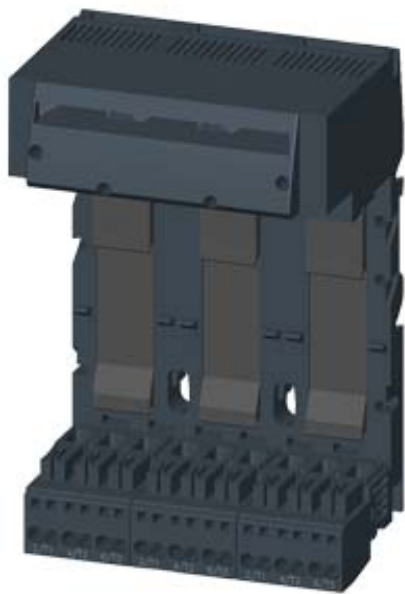

EXTENSION BLOCK 3FOLD,
CONNECTION MAIN CIRCUIT: SPRING-LOADED
TERMINAL,
3 SLOTS FOR COMPACT LOAD FEEDERS

General technical data:		
product brand name		SIRIUS
Product designation		3-expansion block
Protection class IP		IP20
Degree of pollution		3
Number of slots		
• for compact feeder		3
Installation altitude / at a height over sea level		
• maximum	m	2,000
Ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operating	°C	-20 ... +60
Resistance against vibration		f = 4 to 5.8 Hz; d = 15 mm; f = 5.8 to 500 Hz; a = 2 m / s2 10 cycles
Resistance against shock		Semi-sinusoidal a = 6 m/s2 at 10 ms; 3 pos. and 3 neg. Shock in all axes
Reference code		
• according to DIN EN 61346-2		K
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K

Main circuit:		
Operating current / at 400 V / for AC rated value	A	63
Operating voltage / at AC-3 / rated value maximum	V	690
Installation/mounting/dimensions:		
Mounting type		screw and snap-on mounting
Width	mm	135
Height	mm	197
Depth	mm	100
Connections:		
Design of the electrical connection for main current circuit		spring-loaded terminals
Wire stripping length / for main contacts	mm	10
Conductor cross-section that can be connected / for main contacts / for motor outgoing line - unifilar - stranded wire - finely stranded - with conductor end p - without conductor fi	mm ² mm ² mm ² mm ²	1.5 ... 10 1.5 ... 10 1.5 ... 6 1.5 ... 6
AWG number / as coded connectable conductor cross section / for main contacts for motor outgoing line		14 ... 8
Type of the connectable conductor cross-section / for main contacts / for motor outgoing line - solid - stranded - stranded wire - with conductor end processing - without conductor final cutting		2x (1.5 ... 6 mm ²), 1x (1.5 ... 10 mm ²) 2x (1.5 ... 6 mm ²), 1x (1.5 ... 10 mm ²) 2 x (1.5 ... 6) mm ² 2 x (1.5 ... 6) mm ²
Type of the connectable conductor cross-section / for AWG-conductors / for main contacts for motor outgoing line		2 x (16 ... 10), 1 x (16 ... 8)

General Product Approval



EMC

Shipping Approval



other

[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Safety:

Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA6823-0AC/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA6823-0AC

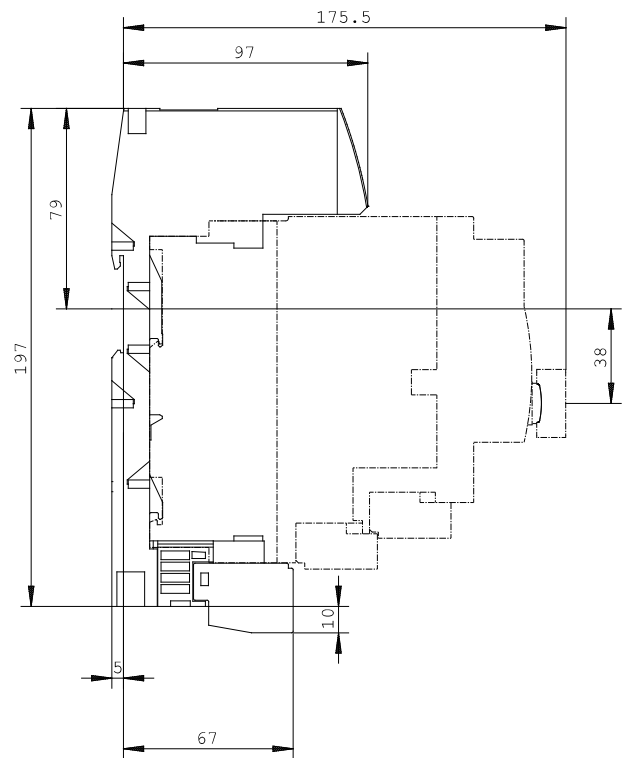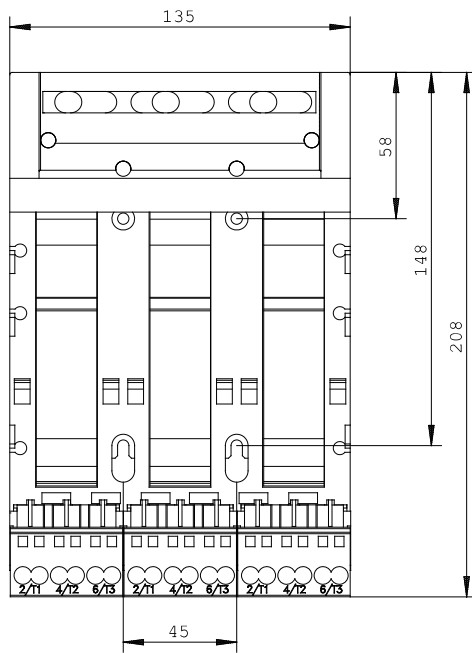

last change:

Jul 7, 2014