



AUXILIARY SWITCH, 1 NC CONTACT,
1 NO CONTACT,
CONNECTION AUXILIARY CIRCUIT: SPRING-LOADED
TERMINAL,

General technical data:

product brand name		SIRIUS
Product designation		auxiliary switch compact feeder
Protection class IP		IP20
Relative humidity		
• during operating phase	%	10 ... 90
Ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operating	°C	-20 ... +60
Reference code		
• according to DIN EN 61346-2		K
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K

Auxiliary circuit:

Number of NC contacts		
• for auxiliary contacts		1
Number of NO contacts		
• for auxiliary contacts		1

Installation/ mounting/ dimensions:

Width	mm	45
Height	mm	32
Depth	mm	25

Connections/ terminals:

Wire stripping length	mm	10
Design of the electrical connection • for auxiliary and control current circuit		spring-loaded terminals
Type of the connectable conductor cross-section / for auxiliary contacts • solid • finely stranded • with conductor end processing • without conductor final cutting		2x (0.25 ... 2.5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 2.5 mm ²)
Type of the connectable conductor cross-section / for AWG conductors • for auxiliary contacts		2x (24 ... 14)

Certificates/ approvals:

Verification of suitability	IEC / EN 60947-6-2
------------------------------------	--------------------

General Product Approval**EMC****Functional Safety / Safety of Machinery****Shipping Approval****other**

[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Further information:**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)



<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA6913-2A/all>

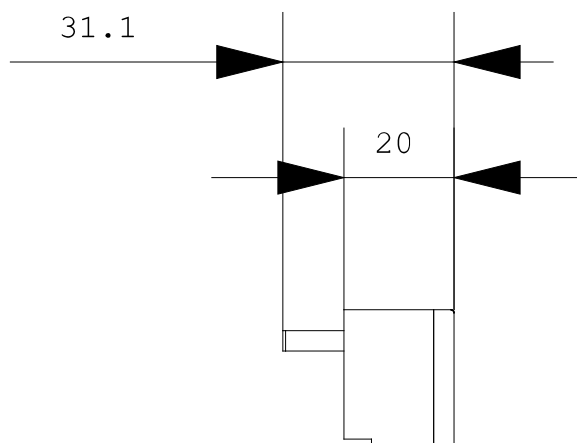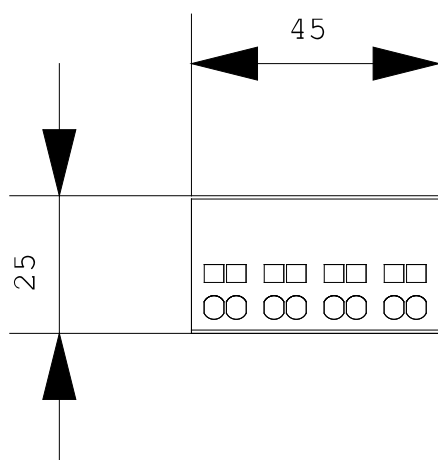

last change:

Jul 7, 2014