

OPERATOR PANEL FOR SIRIUS SWITCHING DEVICES WITH IO-LINK



General technical data:

product brand name		SIRIUS
Product designation		on-site control unit
Relative humidity		
• during operating phase	%	10 ... 90
Ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operating	°C	-20 ... +60
Reference code		
• according to DIN EN 61346-2		S
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		S

Installation/ mounting/ dimensions:

Width	mm	96
Height	mm	44
Depth	mm	36

Certificates/ approvals:

Verification of suitability

IEC / EN 60947-6-2

General Product Approval

EMC

Test Certificates



[Special Test Certificate](#)

Shipping Approval



GL



LRS



PRS

Shipping Approval

other



RINA



RMRS

[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA6935-0A/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA6935-0A

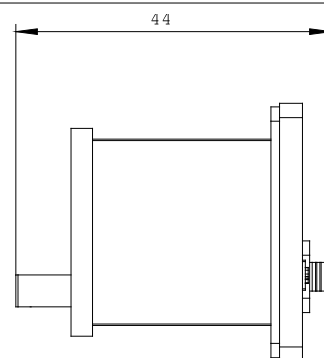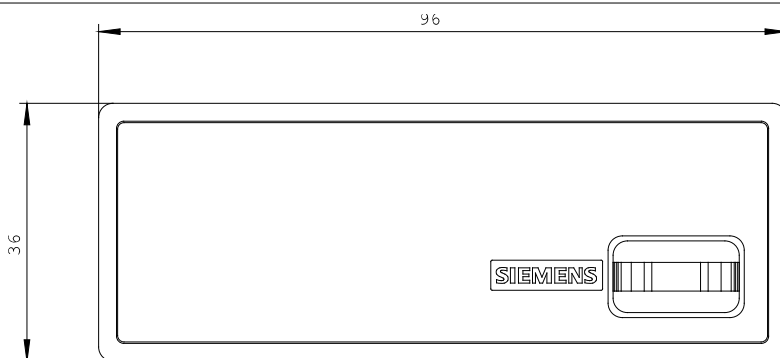

last change:

Jul 7, 2014