

OVERLOAD RELAY 12.5...50 A FOR MOTOR
PROTECTION SIZE S3,
CLASS 20 FOR MOUNTING ONTO CONT. MAIN CIRCUIT:
SCREW CONNECTION AUX. CIRCUIT: SCREW
CONNECTION MANUAL-AUTOMATIC-RESET

General technical data:

product brand name		SIRIUS
Product designation		solid-state overload relay
Size of overload relay		S3
Number of poles / for main current circuit		3
Product function / removable terminal for auxiliary and control circuit		Yes
Impulse voltage resistance / rated value	kV	8
Protection class IP		IP20
Protection class IP / on the front		IP20
Protection against electrical shock		finger-safe
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against shock		15g / 11 ms
Ambient temperature		
• during transport	°C	-40 ... +80
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
Relative humidity / during operating phase / maximum	%	100
Electrostatic discharge / according to IEC 61000-4-2		6 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling / according to IEC 61000-4-3		10 V/m
Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4		2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5		2 kV (line to earth) corresponds to degree of severity 3
Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV (line to line) corresponds to degree of severity 3
Type of protection		PTB 06 ATEX 3001 Ex II (2) GD
Active power loss / total / typical	W	0.05
Size of the contactor / can be combined / company-specific		S3

Main circuit:

Operating current / of the fuse link / rated value	A	160
--	---	-----

Type of assignment		2
--------------------	--	---

Auxiliary circuit:		
Number of NC contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts		1
Number of changeover contacts / for auxiliary contacts		0
Design of the fuse link / for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 6 A
Operating current / of the auxiliary contacts		
• at AC-15		
• at 24 V	A	4
• at 110 V	A	4
• at 120 V	A	4
• at 125 V	A	4
• at 230 V	A	3
• at DC-13		
• at 24 V	A	2
• at 60 V	A	0.55
• at 110 V	A	0.3
• at 125 V	A	0.3
• at 220 V	A	0.11

Protective and monitoring functions:		
Trip class		CLASS 20
Adjustable response current / of the current-dependent overload release	A	12.5 ... 50

Installation/ mounting/ dimensions:		
Mounting type		direct mounting
mounting position		any
Depth	mm	124
Height	mm	106
Width	mm	70

Connections/ terminals:		
Design of the electrical connection		
• for main current circuit		screw-type terminals
• for auxiliary and control current circuit		screw-type terminals
Type of the connectable conductor cross-section		
• for main contacts		
• solid		2x (2.5 ... 16 mm²)
• finely stranded		

- with conductor end processing
- stranded
- for AWG conductors / for main contacts
- for auxiliary contacts
 - solid
 - finely stranded
 - with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (2.5 ... 35 mm²), 2.5 ... 50 mm²
 2x (10 ... 50 mm²), 10 ... 70 mm²
 2x (10 ... 1/0), 1x (10 ... 2/0)

 0.5 ... 4 mm², 2x (0.5 ... 2.5 mm²)

 0.5 ... 2.5 mm², 2x (0.5 ... 1.5 mm²)
 2x (20 ... 14)

Certificates/ approvals:

General Product Approval



EMC

For use in hazardous locations

Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



other

[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RB2046-2UB0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB2046-2UB0

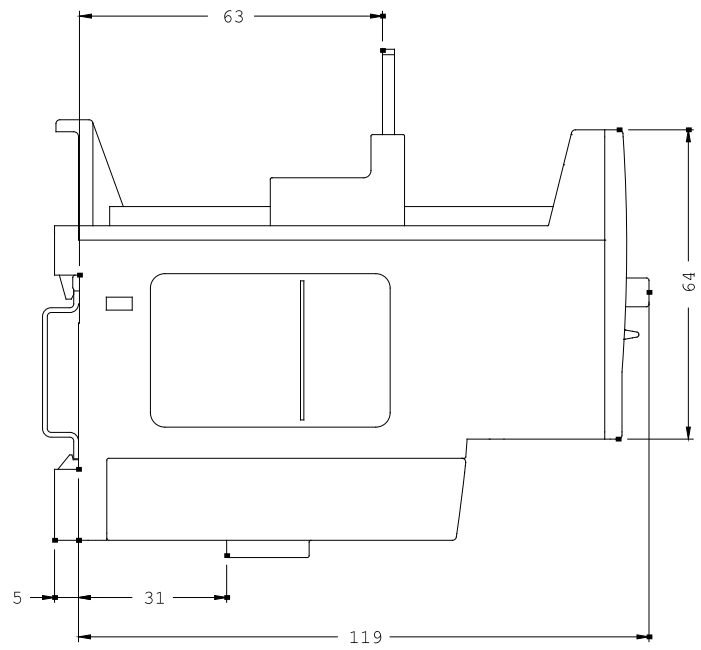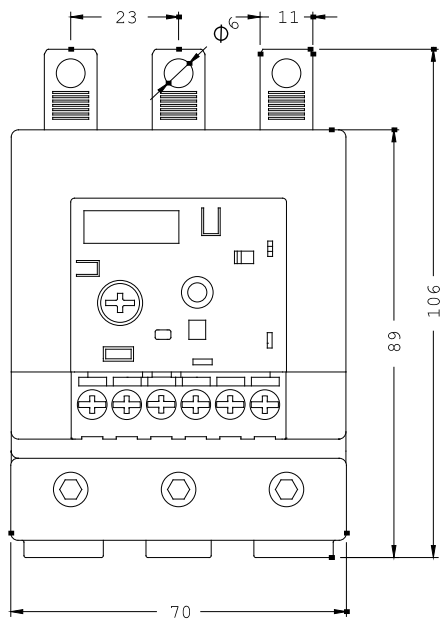

last change:

Jun 16, 2014