



CURRENT TRANSFORMER 0.3...3 A FOR 3RB22/23/24
SIZE S00/S0 STAND-ALONE INSTALLATION MAIN
CIRCUIT: THROUGH TRANSF. AUX. CIRCUIT: --

General technical data:

Adjustable response current

- of the current-dependent overload release

A

0.3 ... 3

Service power / for three-phase servomotors

- rated value

kW

1.1 ... 0.09

Type of protection

PTB 05 ATEX 3022 Ex II (2) GD

Mechanical data:

Mounting type

stand-alone installation

Design of the electrical connection / for main current circuit

straight-through transformers

Ambient conditions:

Protection class IP

IP20

Certificates/ approvals:

General Product Approval	For use in hazardous locations	Test Certificates
--------------------------	--------------------------------	-------------------



CSA



UL



ATEX

[Special Test Certificate](#)

Shipping Approval



ABS



BUREAU
VERITAS



DNV



GL



LRS



RINA

other

[Confirmation](#)

[Declaration of
Conformity](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RB2906-2BG1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB2906-2BG1

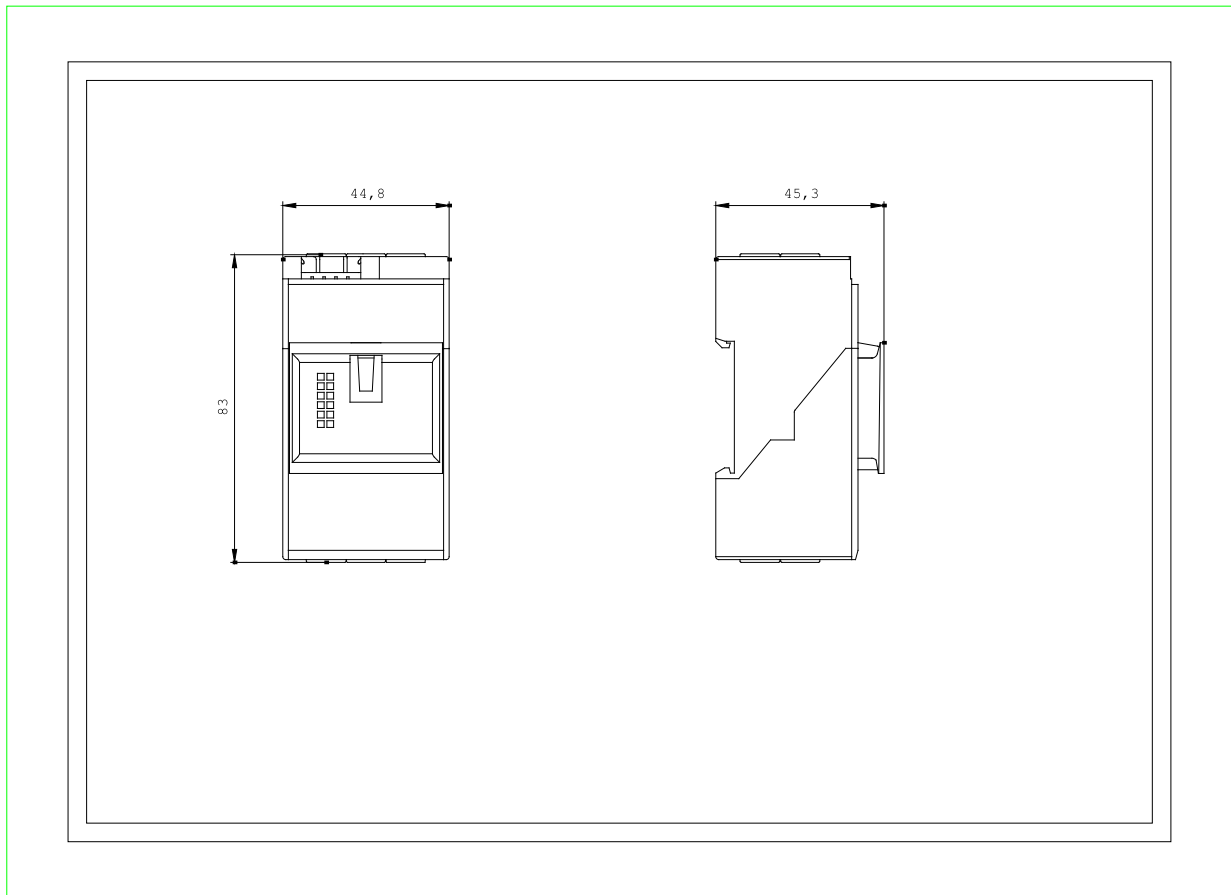

last change:

Jul 1, 2013