

CURRENT TRANSFORMER 20...200 A FOR 3RB22/23/24
SIZE S6 MOUNT. ONTO CONT./ STAND-ALONE MAIN
CIRCUIT: THROUGH TRANSF. AUX. CIRCUIT: --



General technical data:

Adjustable response current • of the current-dependent overload release	A	20 ... 200
Service power / for three-phase servomotors • rated value	kW	90 ... 11
Type of protection		PTB 05 ATEX 3022 Ex II (2) GD

Mechanical data:

Mounting type		direct mounting / stand-alone installation
Design of the electrical connection / for main current circuit		straight-through transformers

Ambient conditions:

Protection class IP		IP20
----------------------------	--	------

Certificates/ approvals:

General Product Approval	For use in hazardous locations	Test Certificates
--------------------------	--------------------------------	-------------------



CSA



UL



ATEX

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Shipping Approval



ABS



BUREAU
VERITAS



DNV



GL



LRS



RINA

other

[Confirmation](#)

[Declaration of Conformity](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RB2956-2TG2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB2956-2TG2

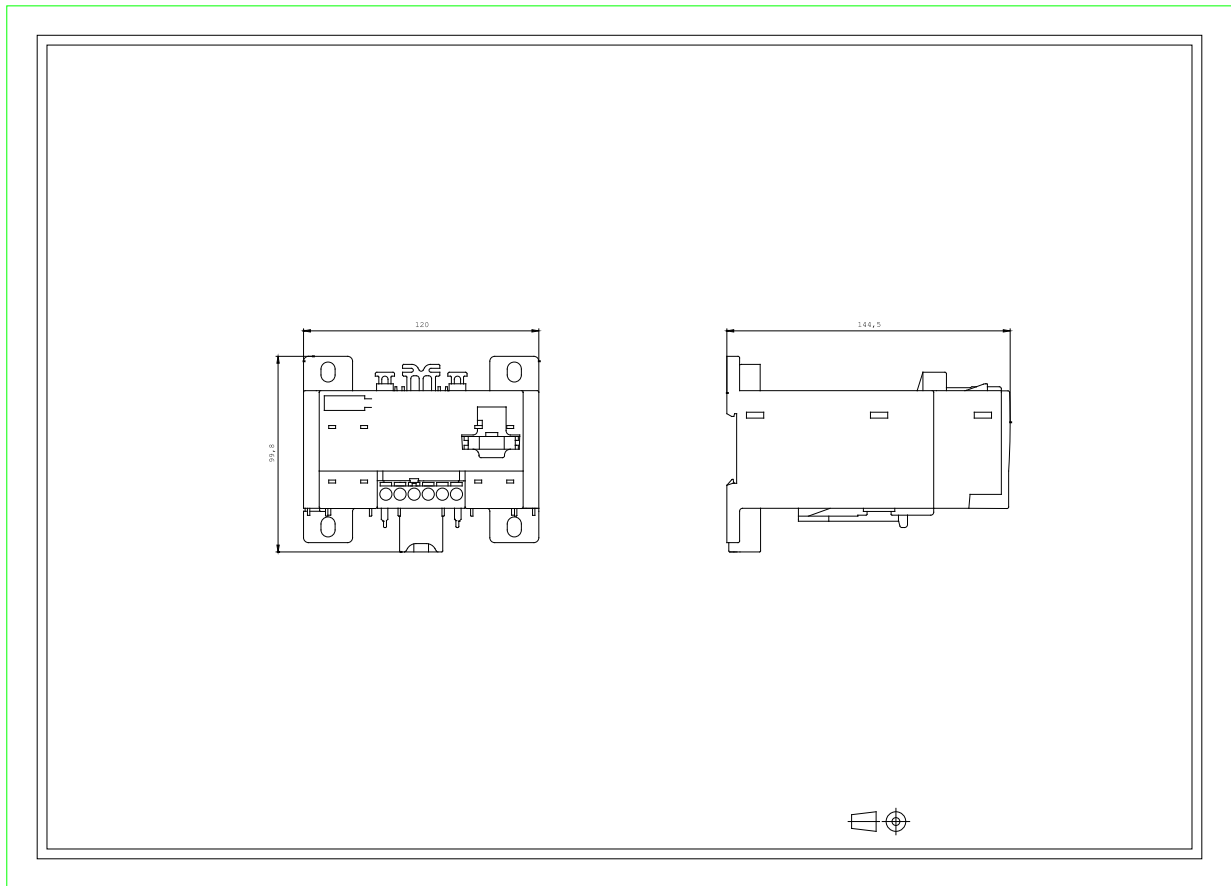

last change:

Jul 1, 2013