


CURRENT TRANSFORMER 20...200 A FOR 3RB22/23/24
SIZE S6 MOUNT. ONTO CONT./ STAND-ALONE MAIN
CIRCUIT: BAR CONNECTION AUX. CIRCUIT: --



General technical data:		
Adjustable response current		
• of the current-dependent overload release	A	20 ... 200
Service power / for three-phase servomotors		
• rated value	kW	90 ... 11
Type of protection		PTB 05 ATEX 3022 Ex II (2) GD
Mechanical data:		
Mounting type		direct mounting / stand-alone installation
Design of the electrical connection / for main current circuit		screw-type terminals
Ambient conditions:		
Protection class IP		IP20
Certificates/ approvals:		

General Product Approval			For use in hazardous locations	Test Certificates	
 CSA		 UL	 ATEX	Special Test Certificate	Type Test Certificates/Test Report
Shipping Approval					
 ABS	 BUREAU VERITAS	 DNV	 GL	 LRS	 RINA
other					
Confirmation	Declaration of Conformity	Environmental Confirmations			
Further information:					
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs					
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall					
Cax online generator http://www.siemens.com/cax					
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RB2956-2TH2/all					
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB2956-2TH2					

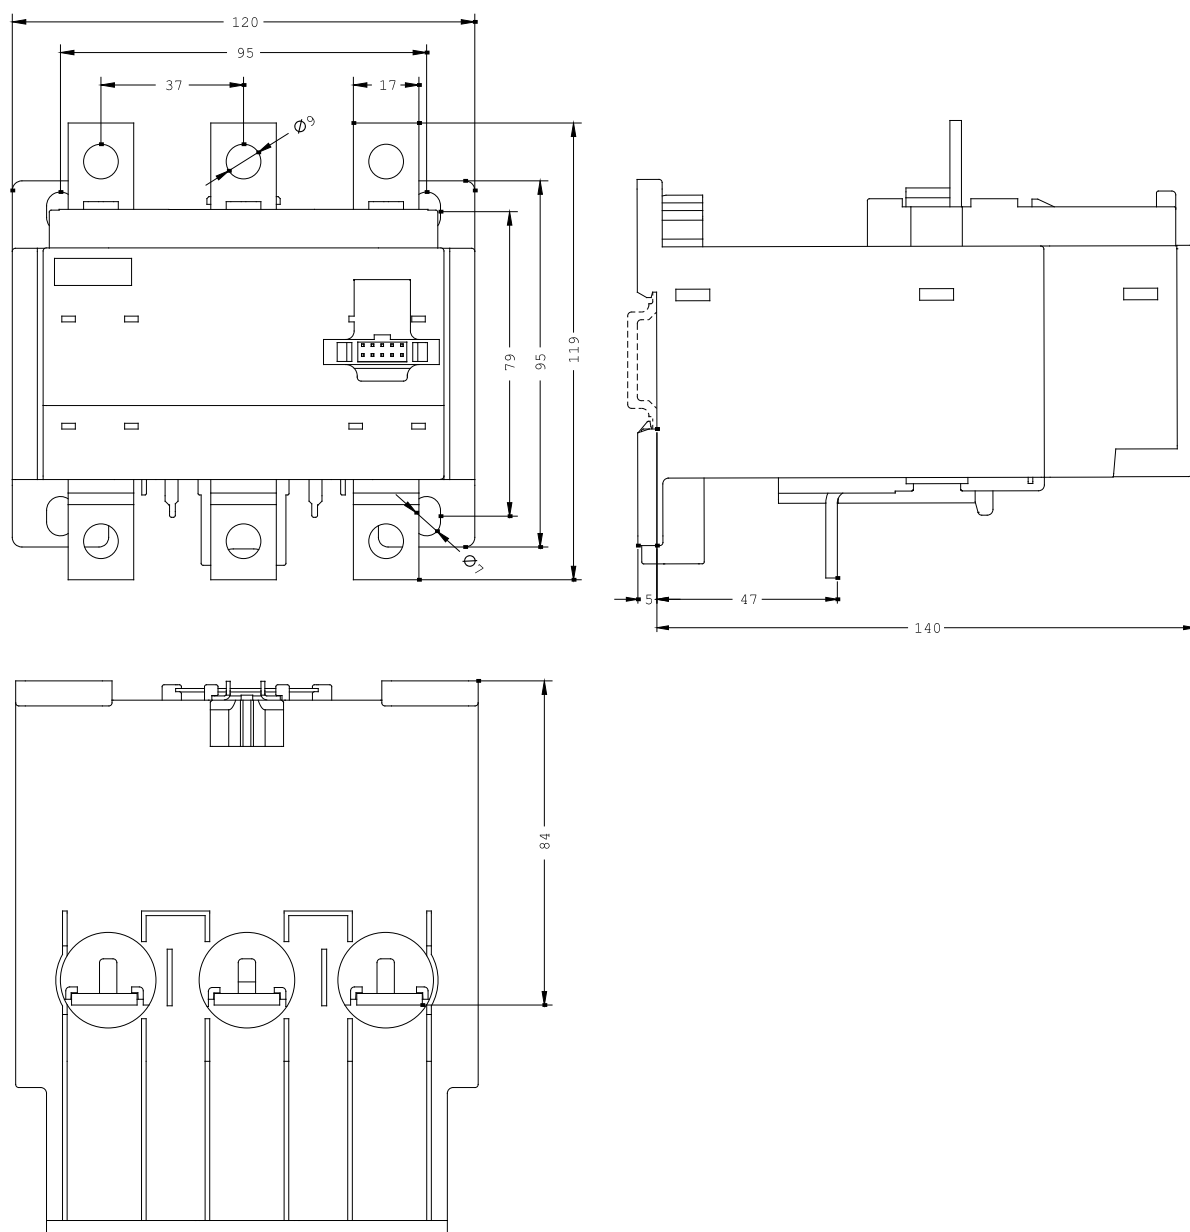

last change:

Jul 1, 2013