

CURRENT TRANSFORMER 63...630 A FOR 3RB22/23/24
SIZE S10/S12 MOUNT. ONTO CONT./ STAND-ALONE
MAIN CIRCUIT: BAR CONNECTION AUX. CIRCUIT: --



General technical data:

Adjustable response current

- of the current-dependent overload release

A

63 ... 630

Service power / for three-phase servomotors

- rated value

kW

450 ... 37

Type of protection

PTB 05 ATEX 3022 Ex II (2) GD

Mechanical data:

Mounting type

direct mounting / stand-alone installation

Design of the electrical connection / for main current circuit

screw-type terminals




Ambient conditions:

Protection class IP

IP20

Certificates/ approvals:

General Product Approval			For use in hazardous locations	Test Certificates	
 CSA		 UL	 ATEX	Special Test Certificate	Type Test Certificates/Test Report
Shipping Approval					
 ABS		 GL	 LRS	 RINA	
other					
Confirmation	Declaration of Conformity	Environmental Confirmations			
Further information:					
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs					
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall					
Cax online generator http://www.siemens.com/cax					
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RB2966-2WH2/all					
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB2966-2WH2					

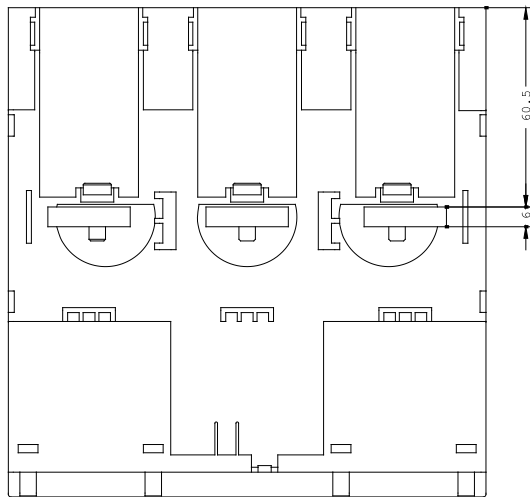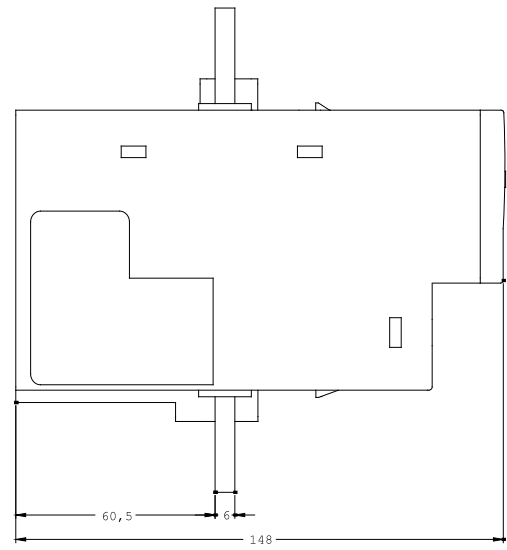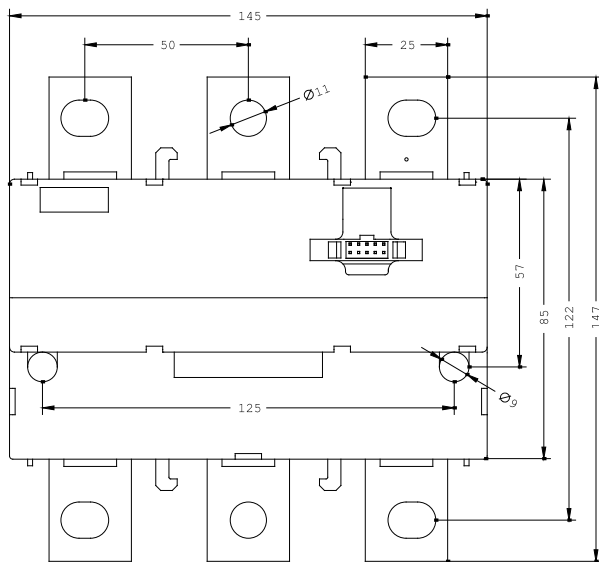

last change:

Jul 1, 2013