



DIRECT STARTER, 5.5 KW,
RELAY CAN BE CONNECTED, CONTACT. 3RT10,
230V,50/60 HZ, SIZE S00, PE TERMINAL,
MOULDED PLASTIC HOUSING IP65,
EUROPEAN DESIGN, PUSHB. I-0 (0=R),
BLACK/WHITE

Certificates/ approvals:

General Product
Approval



Declaration of
Conformity



Test Certificates

[Special Test
Certificate](#)

other

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RE1010-8XC17-0AP0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RE1010-8XC17-0AP0

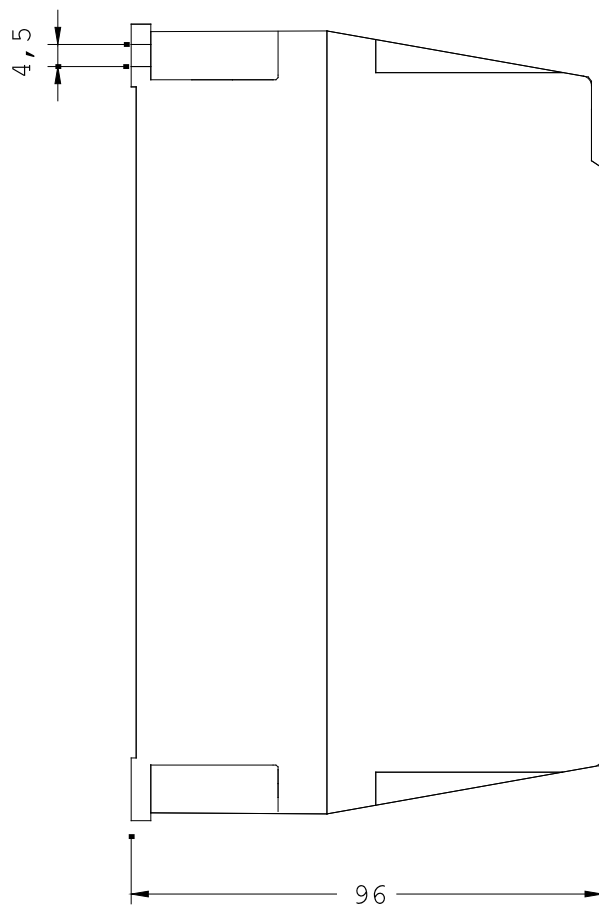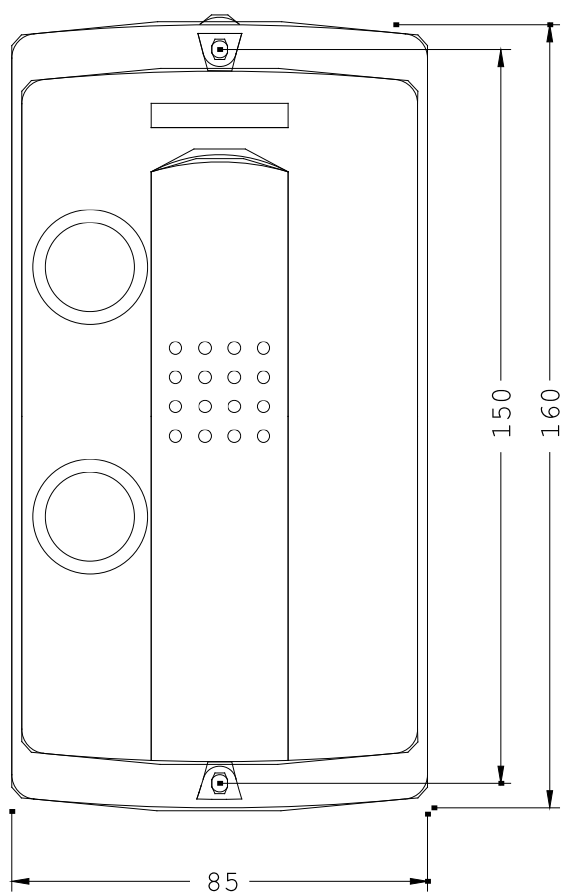

last change: