

DIRECT STARTER, 7.5 KW,
RELAY CAN BE CONNECTED,
CONTACTOR 3RT10, 230 V, 50 HZ, SIZE S0,
PE AND N TERMINAL MOULDED PLASTIC HOUSING
IP65,
EUROPEAN DESIGN, PUSHB. I-0 (0=R),
BLACK/WHITE

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
	 EG-Konf.	Special Test Certificate	Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RE1020-8XC25-0AP0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RE1020-8XC25-0AP0

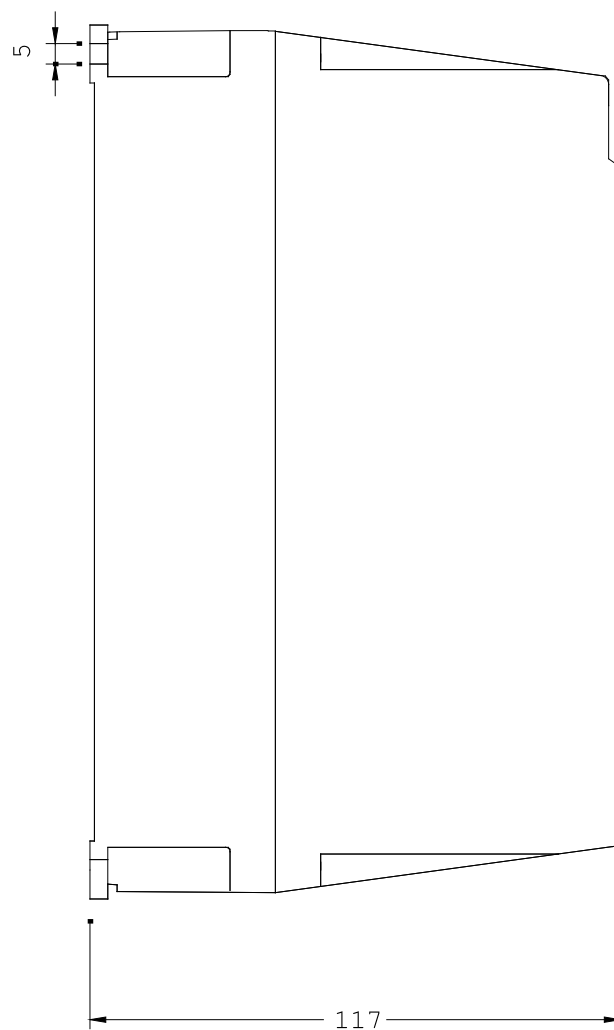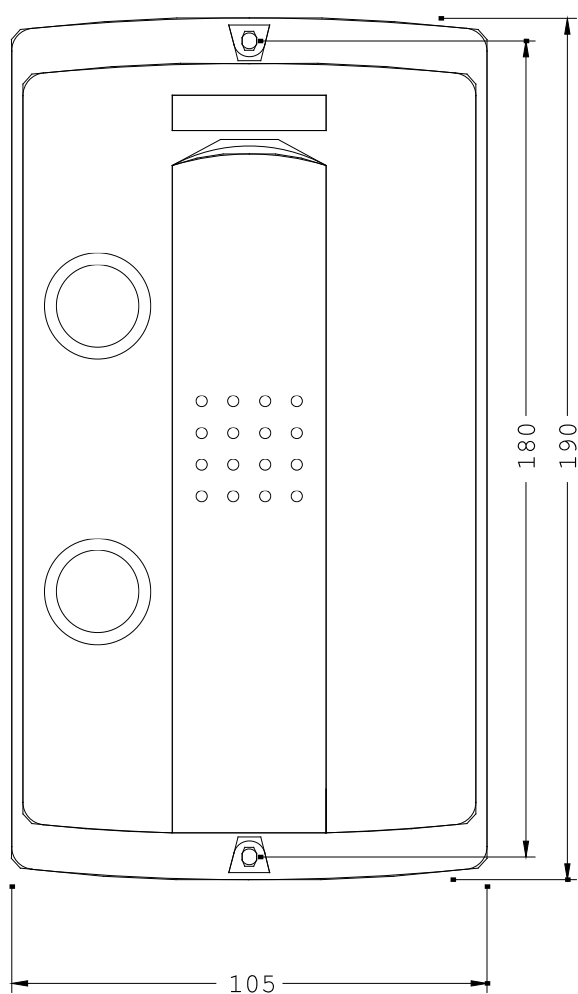

last change: