



SEMI-CONDUCTOR CONTACTOR 3RF2 AC 51 10 A 40  
DEGREES C 48-460 V / 24 V DC SCREW TERMINAL

### Main circuit:

Voltage slew rate / at the thyristor / for main contacts /  
maximum permissible

V/ $\mu$ s 1,000

I<sup>2</sup>t-level / maximum

A<sup>2</sup>·s 200

Fuse assignments

[https://www.automation.siemens.com/cd-static/material/info/3RF21\\_eng.pdf](https://www.automation.siemens.com/cd-static/material/info/3RF21_eng.pdf)

### Certificates/approvals:

General Product Approval

EMC

Declaration of Conformity



CSA



GOST



UL



C-TICK



EG-Konf.

Test Certificates

other

[Special Test  
Certificate](#)


[Type Test  
Certificates/Test  
Report](#)




[Environmental  
Confirmations](#)

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

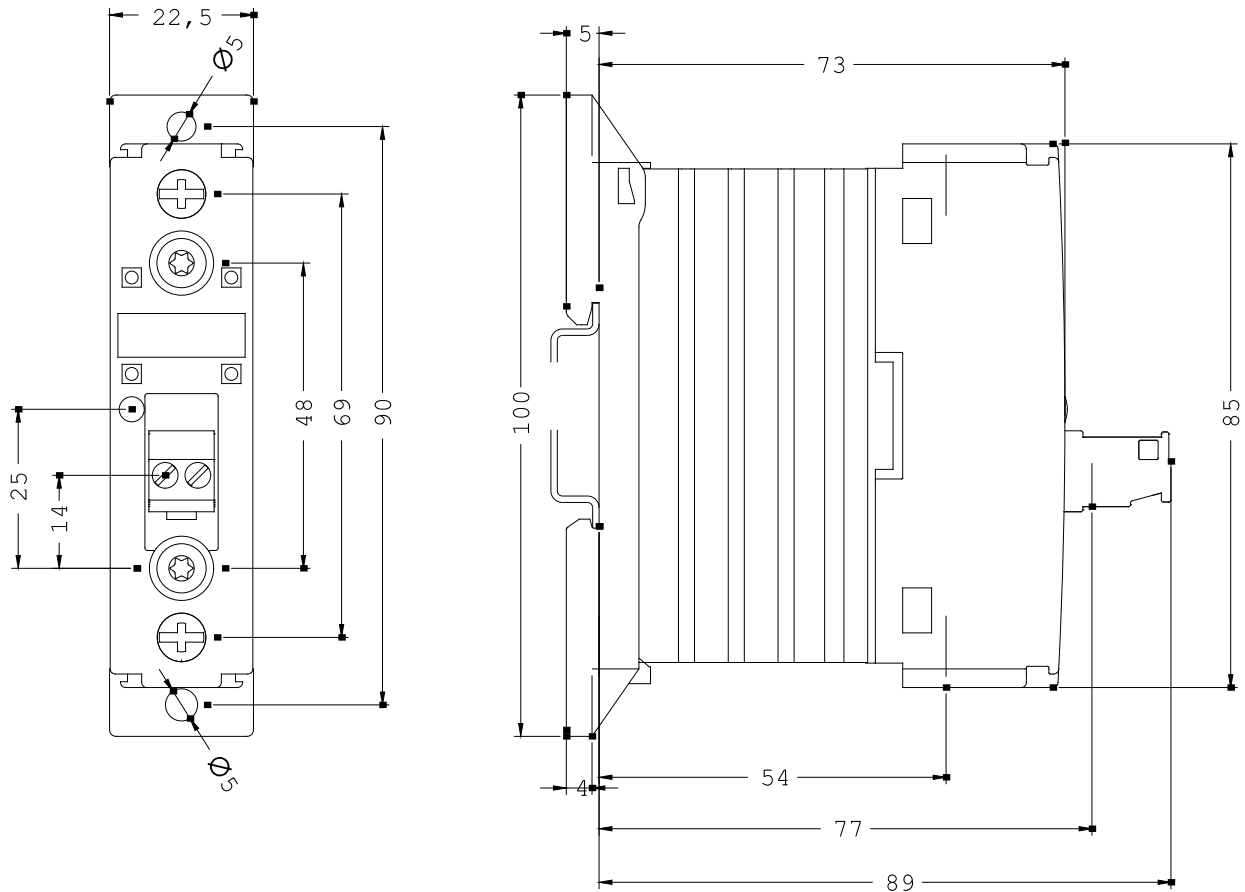

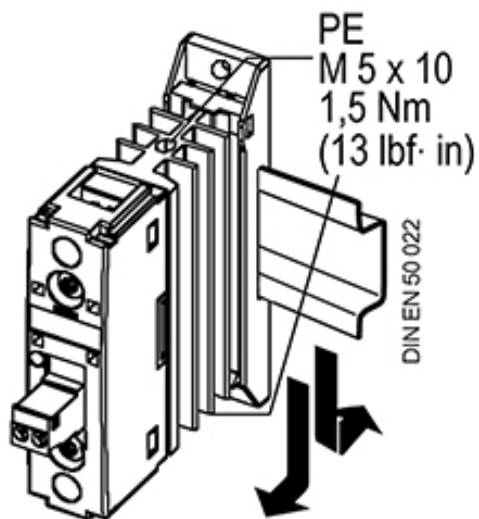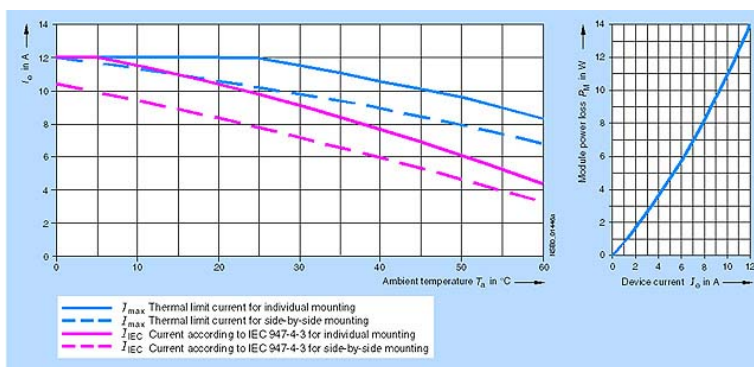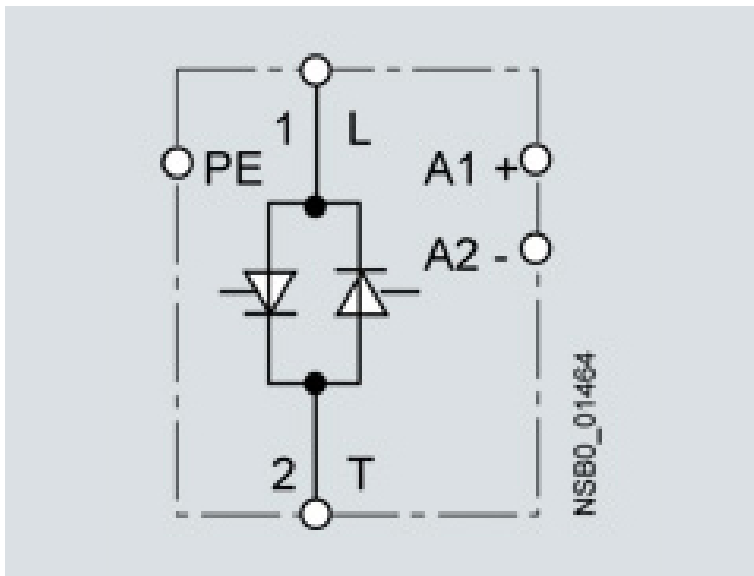

last change:

Feb 4, 2013