



SOLID-STATE CONTACTOR 3-PH 3RF3 AC53 5.2A 40 DEGREES C 48-600V / 24V DC 2-PH. CONTROLLED INSTANTANEOUS SPRING-LOADED TERMINALS

General technical data:

product brand name		SIRIUS
Product designation		solid-state motor contactor
Protection class IP		IP20
Insulation voltage / rated value	V	600
Installation altitude / at a height over sea level / maximum	m	1,000
Ambient temperature		
• during storage	°C	-55 ... +80
• during operating	°C	-25 ... +60
Shock resistance		
• according to IEC 60068-2-27		15g / 11 ms
Resistance against vibration		
• according to IEC 60068-2-6		2g
Resistance against the impulse current / rated value	A	600
Active power loss / total / typical	W	10
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
• according to DIN EN 61346-2		Q
Product function		instantaneous switching

Main circuit:		
Number of poles / for main current circuit		3
Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		2
Operating frequency		
• rated value	Hz	60 ... 50
Operating voltage		
• at 60 Hz / at AC / rated value	V	48 ... 600
• at 50 Hz / at AC / rated value	V	48 ... 600
Operating current		
• minimum	mA	500
• at AC-3 / at 400 V / rated value	A	5.2
Working range relative to the operating voltage		
• at 50 Hz / with AC	V	40 ... 660
• at 60 Hz / with AC	V	40 ... 660
Service power / at AC-3 / at 400 V		
• rated value	kW	2.2
Derating temperature	°C	40
Tolerance of the line frequency	Hz	5
Relative symmetrical tolerance / of the operation frequency	%	10
I ² t-level / maximum	A ² ·s	1,800
Voltage slew rate / at the thyristor / for main contacts		
• maximum permissible	V/μs	1,000
Block voltage / at the thyristor / for main contacts		
• maximum permissible	V	1,600
Reverse current / of the thyristor	mA	10
Control circuit/ Control:		
Voltage type / of control feed voltage		DC
Control supply voltage		
• 1		
• for DC		
• initial rated value	V	15
• for DC / final value for signal<0>-recognition	V	5
Control current		
• for DC / rated value	mA	15
• at minimum control supply voltage / for DC	mA	2
switching times		
• ON delay		1 ms
• OFF delay		1 ms + in addition max. one half-wave

Auxiliary circuit:		
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		0
Installation/ mounting/ dimensions:		
mounting position		vertical
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Mounting type / series installation		Yes
Tightening torque / of the screw for fastening of the operating resource	N·m	1.5
Design of the thread / of the screw for fastening of the operating resource		M4
Width	mm	45
Height	mm	95
Depth	mm	100.8
Distance, to be maintained, to the ranks assembly / upwards	mm	70
Distance, to be maintained, to the ranks assembly / downwards	mm	50
Connections/ terminals:		
Design of the electrical connection		• for main current circuit • for auxiliary and control current circuit
Product function / removable terminal for auxiliary and control circuit		Yes
Type of the connectable conductor cross-section		• for main contacts • solid • finely stranded • with conductor end processing • without conductor final cutting • for AWG conductors / for main contacts • for auxiliary and control contacts • solid • finely stranded • with conductor end processing • without conductor final cutting • for AWG conductors / for auxiliary and control contacts
Skinning length / of the cable	mm	10

- for auxiliary and control contacts

mm 10

Certificates/ approvals:

Verification of suitability

CE / UL / CSA / CCC / C-TICK

General Product Approval

EMC

Declaration of Conformity



CCC



CSA



UL



C-TICK



EG-Konf.

Test Certificates

other

[Type Test
Certificates/Test
Report](#)

[Environmental
Confirmations](#)

UL/CSA ratings:

yielded mechanical performance [hp] / for three-phase squirrel cage motors

- at 200/208 V / rated value
- at 220/230 V / rated value
- at 460/480 V / rated value
- at 575/600 V / rated value

hp	0.5
hp	0.75
hp	2
hp	2

Full-load current (FLA) / for 3-phase motor

- at 480 V / rated value
- at 600 V / rated value

A	3.4
A	2.7

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/>

Cax online generator





<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RF3405-2BB06/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RF3405-2BB06

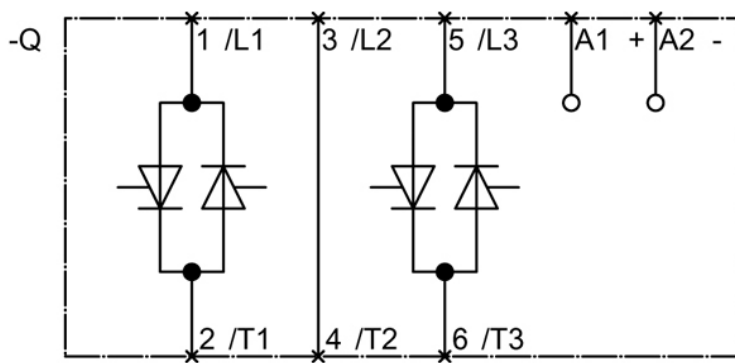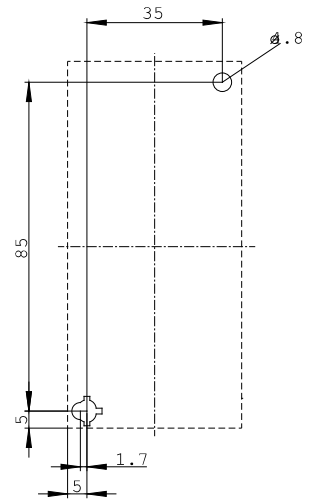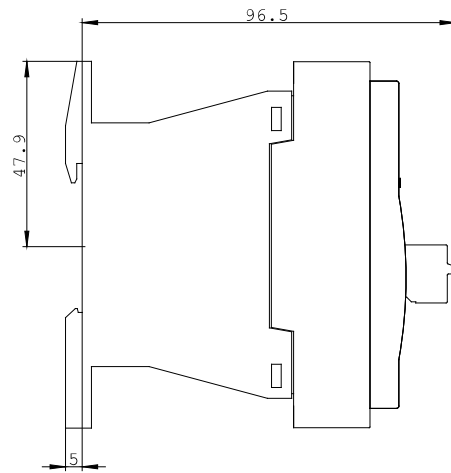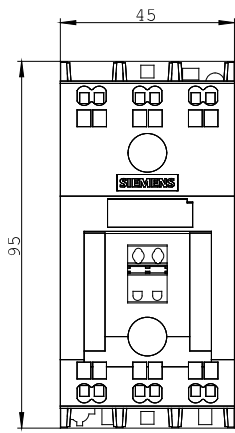

last change:

Aug 4, 2014