



SOLID-STATE CONTACTOR 3-PH 3RF3 AC53 9.2A 40 DEGREES C 48-600V / 110-230V AC 2-PH. CONTROLLED INSTANTANEOUS SCREW TERMINALS

### General technical data:

|                                                                     |    |                               |
|---------------------------------------------------------------------|----|-------------------------------|
| <b>product brand name</b>                                           |    | SIRIUS                        |
| <b>product designation</b>                                          |    | solid-state motor contactor   |
| • _1 / of the accessories that can be ordered                       |    | Link module                   |
| • _2 / of the accessories that can be ordered                       |    | Connection adapter            |
| <b>Manufacturer article number</b>                                  |    |                               |
| • _1 / of the accessories that can be ordered                       |    | <a href="#">3RA2921-1BA00</a> |
| • _2 / of the accessories that can be ordered                       |    | <a href="#">3RF3900-0QA88</a> |
| <b>Protection class IP</b>                                          |    | IP20                          |
| <b>Insulation voltage / rated value</b>                             | V  | 600                           |
| <b>Installation altitude / at a height over sea level / maximum</b> | m  | 1,000                         |
| <b>Ambient temperature</b>                                          |    |                               |
| • during storage                                                    | °C | -55 ... +80                   |
| • during operating                                                  | °C | -25 ... +60                   |
| <b>Resistance against shock</b>                                     |    |                               |
| • according to IEC 60068-2-27                                       |    | 15g / 11 ms                   |
| <b>Resistance against vibration</b>                                 |    |                               |
| • according to IEC 60068-2-6                                        |    | 2g                            |
| <b>Resistance against the impulse current / rated value</b>         | A  | 600                           |
| <b>Active power loss / total / typical</b>                          | W  | 16                            |

|                                                                                                                                                |                   |                         |
|------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------|
| <b>Item designation</b><br><br>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750<br><br>• according to DIN EN 61346-2 |                   | K                       |
|                                                                                                                                                |                   | Q                       |
| <b>Product function</b>                                                                                                                        |                   | instantaneous switching |
| <b>Main circuit:</b>                                                                                                                           |                   |                         |
| <b>Number of poles / for main current circuit</b>                                                                                              |                   | 3                       |
| <b>Number of NC contacts / for main contacts</b>                                                                                               |                   | 0                       |
| <b>Number of NO contacts / for main contacts</b>                                                                                               |                   | 2                       |
| <b>Operating frequency</b><br><br>• rated value                                                                                                | Hz                | 60 ... 50               |
| <b>Operating voltage</b><br><br>• at 60 Hz / at AC / rated value<br><br>• at 50 Hz / at AC / rated value                                       | V                 | 48 ... 600              |
|                                                                                                                                                | V                 | 48 ... 600              |
| <b>Operating current</b><br><br>• minimum<br><br>• at AC-3 / at 400 V / rated value                                                            | mA                | 500                     |
|                                                                                                                                                | A                 | 9.2                     |
| <b>Working area related to the operating voltage</b><br><br>• at 50 Hz / for AC<br><br>• at 60 Hz / for AC                                     | V                 | 40 ... 660              |
|                                                                                                                                                | V                 | 40 ... 660              |
| <b>Service power / at AC-3 / at 400 V</b><br><br>• rated value                                                                                 | kW                | 4                       |
| <b>Derating temperature</b>                                                                                                                    | °C                | 40                      |
| <b>Tolerance of the line frequency</b>                                                                                                         | Hz                | 5                       |
| <b>Relative symmetrical tolerance / of the operation frequency</b>                                                                             | %                 | 10                      |
| <b>I<sup>2</sup>t-level / maximum</b>                                                                                                          | A <sup>2</sup> ·s | 1,800                   |
| <b>Voltage slew rate / at the thyristor / for main contacts</b><br><br>• maximum permissible                                                   | V/μs              | 1,000                   |
| <b>Block voltage / at the thyristor / for main contacts</b><br><br>• maximum permissible                                                       | V                 | 1,600                   |
| <b>Reverse current / of the thyristor</b>                                                                                                      | mA                | 10                      |
| <b>Control circuit:</b>                                                                                                                        |                   |                         |
| <b>Type of voltage / of the controlled supply voltage</b>                                                                                      |                   | AC                      |
| <b>Control supply voltage frequency</b><br><br>• 1 / rated value<br><br>• 2 / rated value                                                      | Hz                | 50                      |
|                                                                                                                                                | Hz                | 60                      |
| <b>Relative symmetrical tolerance</b><br><br>• of the control supply voltage frequency<br><br>• of the supply voltage frequency                | %                 | 10                      |
|                                                                                                                                                | %                 | 10                      |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |    |     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-----|
| <b>Control supply voltage</b> <ul style="list-style-type: none"> <li>• 1 <ul style="list-style-type: none"> <li>• at 50 Hz / for AC <ul style="list-style-type: none"> <li>• initial rated value</li> <li>• final rated value</li> </ul> </li> <li>• at 60 Hz / for AC <ul style="list-style-type: none"> <li>• initial rated value</li> <li>• final rated value</li> </ul> </li> <li>• at 50 Hz / for AC / final value for signal&lt;0&gt;-recognition</li> <li>• at 60 Hz / for AC / final value for signal&lt;0&gt;-recognition</li> </ul> </li> </ul> |    |     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | V  | 90  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | V  | 253 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |    |     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | V  | 90  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | V  | 253 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | V  | 40  |
| <b>Control current</b> <ul style="list-style-type: none"> <li>• for AC / rated value</li> <li>• at minimum control supply voltage / for AC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                     | mA | 15  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | mA | 2   |

|                                                                |  |   |
|----------------------------------------------------------------|--|---|
| <b>Auxiliary circuit:</b>                                      |  |   |
| <b>Number of NC contacts / for auxiliary contacts</b>          |  | 0 |
| <b>Number of NO contacts / for auxiliary contacts</b>          |  | 0 |
| <b>Number of change-over switches / for auxiliary contacts</b> |  | 0 |

|                                                                                                                                           |     |                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------|-----|--------------------------------------------------------------|
| <b>Installation/mounting/dimensions:</b>                                                                                                  |     |                                                              |
| <b>mounting position</b>                                                                                                                  |     | vertical                                                     |
| <b>Type of mounting</b>                                                                                                                   |     | screw and snap-on mounting onto 35 mm standard mounting rail |
| <b>Type of fixing/fixation / series installation</b>                                                                                      |     | Yes                                                          |
| <b>Tightening torque / of the screw for fastening of the operating resource</b>                                                           | N·m | 1.5                                                          |
| <b>Design of the thread / of the screw for fastening of the operating resource</b>                                                        |     | M4                                                           |
| <b>Width</b>                                                                                                                              | mm  | 90                                                           |
| <b>Height</b>                                                                                                                             | mm  | 95                                                           |
| <b>Depth</b>                                                                                                                              | mm  | 100.8                                                        |
| <b>Distance, to be maintained, to the ranks assembly</b> <ul style="list-style-type: none"> <li>• upwards</li> <li>• downwards</li> </ul> | mm  | 70                                                           |
|                                                                                                                                           | mm  | 50                                                           |
|                                                                                                                                           |     |                                                              |

|                                                                                                                                                                              |  |                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------|
| <b>Connections:</b>                                                                                                                                                          |  |                      |
| <b>Design of the electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul> |  | screw-type terminals |
|                                                                                                                                                                              |  | screw-type terminals |
| <b>Design of the thread / of the connection screw</b> <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• of the auxiliary and control pins</li> </ul>     |  | M4                   |
|                                                                                                                                                                              |  | M3                   |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                  |                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product function / removable terminal for auxiliary and control circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                  | Yes                                                                                                                                                                                                                                                                                                                                                |
| <b>Type of the connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded <ul style="list-style-type: none"> <li>with conductor end processing</li> </ul> </li> </ul> </li> <li>for AWG conductors / for main contacts</li> <li>for auxiliary and control contacts <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded <ul style="list-style-type: none"> <li>with conductor end processing</li> <li>without conductor final cutting</li> </ul> </li> </ul> </li> <li>for AWG conductors / for auxiliary and control contacts</li> </ul> |                  | 2x (0.5 ... 2.5 mm <sup>2</sup> )<br><br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (18 ... 14)<br><br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )<br><br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )<br>1x (AWG 20 ... 12) |
| <b>Tightening torque</b> <ul style="list-style-type: none"> <li>for main contacts / with screw-type terminals</li> <li>for auxiliary and control contacts / with screw-type terminals</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | N·m<br>N·m       | 2 ... 2.5<br>0.5 ... 0.6                                                                                                                                                                                                                                                                                                                           |
| <b>Tightening torque (lbf·in)</b> <ul style="list-style-type: none"> <li>for main contacts / with screw-type terminals</li> <li>for auxiliary and control contacts / with screw-type terminals</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                              | lbf·in<br>lbf·in | 18 ... 22<br>7.5 ... 5.3                                                                                                                                                                                                                                                                                                                           |
| <b>Skinning length / of the cable</b> <ul style="list-style-type: none"> <li>for main contacts</li> <li>for auxiliary and control contacts</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | mm<br>mm         | 7<br>7                                                                                                                                                                                                                                                                                                                                             |

#### Certificates/approvals:

##### Verification of suitability

CE / UL / CSA / CCC / C-TICK

##### General Product Approval

##### EMC

##### Declaration of Conformity

##### Test Certificates



CSA



GOST



UL



C-TICK



EG-Konf.

[Type Test Certificates/Test Report](#)

#### UL/CSA ratings

##### yielded mechanical performance (hp) / for three-phase squirrel cage motors

- at 200/208 V / rated value
- at 220/230 V / rated value
- at 460/480 V / rated value
- at 575/600 V / rated value

hp 1.5  
hp 2  
hp 3  
hp 5

##### Operating current (FLA) / for three-phase squirrel cage motors

- at 480 V / rated value

A 4.8

• at 600 V / rated value

A

6.1

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator



<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RF3410-1BB26/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RF3410-1BB26](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RF3410-1BB26)

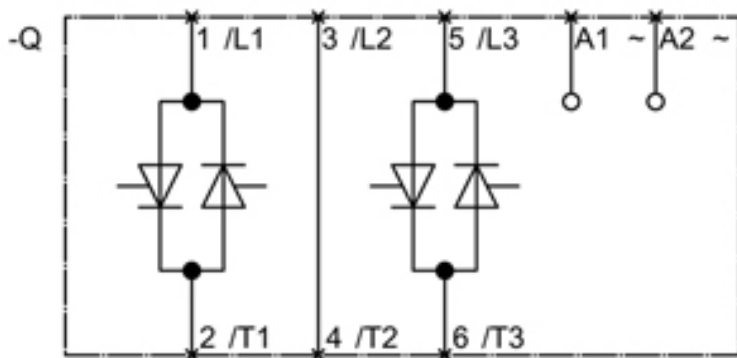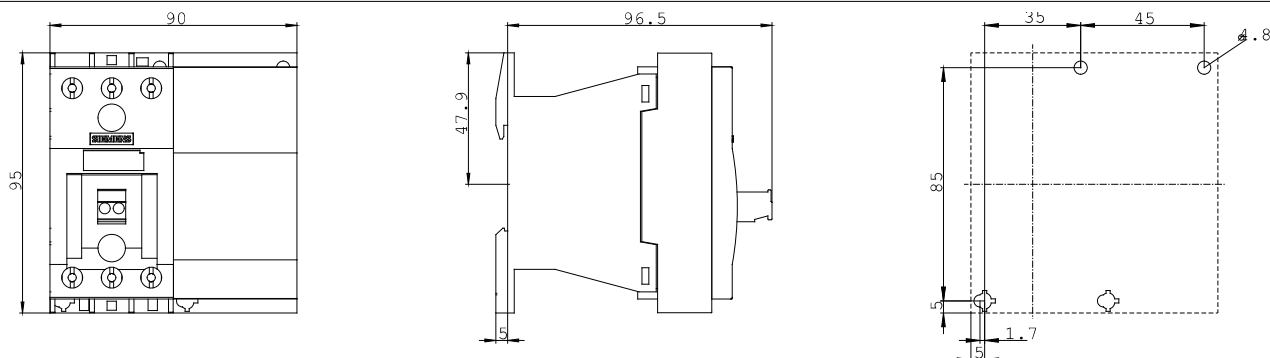

last change:

Feb 4, 2013