

CONTACTOR RELAY, 4NO+4NC, 42 V AC,
50/60 HZ, SCREW CONNECTION, SIZE S00

General technical data:

product brand name		SIRIUS
Product designation		contactor relay
Size of the contactor		S00
Protection class IP / on the front		IP20
Degree of pollution		3
Insulation voltage / with degree of pollution 3 / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operating	°C	-25 ... +60
Contact reliability		one incorrect switching operation of 100 million switching operations (17 V, 1 mA)
Resistance against shock		10g / 5 ms and 5g / 10 ms
Impulse voltage resistance / rated value	kV	6
Reference code		
• according to DIN EN 61346-2		K
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
• according to DIN EN 81346-2		K
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000

Control circuit/ Control:

Voltage type / of control feed voltage		AC
Control supply voltage frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Control supply voltage		
• at 50 Hz / at AC / rated value	V	42
• at 60 Hz / at AC / rated value	V	42
Operating range factor control supply voltage rated value / of the magnet coil		

• at 50 Hz • for AC		0.8 ... 1.1
• at 60 Hz • for AC		0.85 ... 1.1
Apparent pull-in power / of the solenoid / for AC	V·A	27
Apparent holding power / of the solenoid / for AC	V·A	4.6
Inductive power factor		
• with the pull-in power of the coil		0.8
• with the pull-in power of the coil		0.27

Auxiliary circuit:		
Product extension / auxiliary switch		No
Identification number and letter for switching elements		44 E
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts		4
• delayed switching		0
• instantaneous switching		4
• asynchronous switching		0
• lagging switching		0
Number of NO contacts / for auxiliary contacts		4
• instantaneous switching		4
• delayed switching		0
• asynchronous switching		0
• leading switching		0
Number of changeover contacts		
• for auxiliary contacts		0
• of the auxiliary contacts / instantaneous switching		0
Operating current		
• at AC-12 / maximum	A	10
• at AC-15		
• at 230 V / rated value	A	6
• at 400 V / rated value	A	3
• at 500 V / rated value	A	2
• at 690 V / rated value	A	1
Operating current / with 1 current path		
• at DC-12		
• at 24 V / rated value	A	10
• at 110 V / rated value	A	3
• at 220 V / rated value	A	1
• at DC-13		

- at 24 V / rated value
- at 110 V / rated value
- at 220 V / rated value

A	10
A	1
A	0.27

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch / required

fuse gL/gG: 10 A

Installation/ mounting/ dimensions:

mounting position

+/-180° rotation possible on vertical mounting surface;
can be tilted forward and backward by +/- 22.5° on vertical mounting surface

Mounting type

screw and snap-on mounting

Width

mm 45

Height

mm 57.5

Depth

mm 111

Distance, to be maintained, to the racks assembly / sideways

mm 0

Connections/ terminals:

Design of the electrical connection / for auxiliary and control current circuit

screw-type terminals

Type of the connectable conductor cross-section

- for auxiliary contacts
 - solid
 - finely stranded
 - with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), 2x 4 mm²

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/ approvals:

Verification of suitability

CSA / UL / CCC / GL / LRS / BV / DNV / RMRS / RINA

General Product Approval

**Functional Safety /
Safety of
Machinery**

**Declaration of
Conformity**



CCC



CSA



UL

[Type Examination](#)



EG-Konf.

Test Certificates

Shipping Approval

[Special Test
Certificate](#)

[Type Test
Certificates/Test
Report](#)



ABS



GL



RINA



RMRS

other

[other](#)

[Environmental
Confirmations](#)

Proportion of dangerous failures		
• with high demand rate / according to SN 31920	%	75
• with low demand rate / according to SN 31920	%	40

- | | |
|---|----|
| % | 75 |
| % | 40 |

Protection against electrical shock		finger-safe
-------------------------------------	--	-------------

T1 value / for proof test interval or service life / according to IEC 61508	a	20
---	---	----

a	20
---	----

B10 value / with high demand rate		
• according to SN 31920		1,000,000
• note		With 0.3 x le

- 1,000,000
With 0.3 x le

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/>

<https://mall.industry.siemens.com/>

Cax online generator
<http://www.siemens.com/cax>


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3RH1344-1AD00/all>

<http://support.automation.siemens.com/WW/view/en/3RH1344-1AD00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1344-1AD00

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1344-1AD00

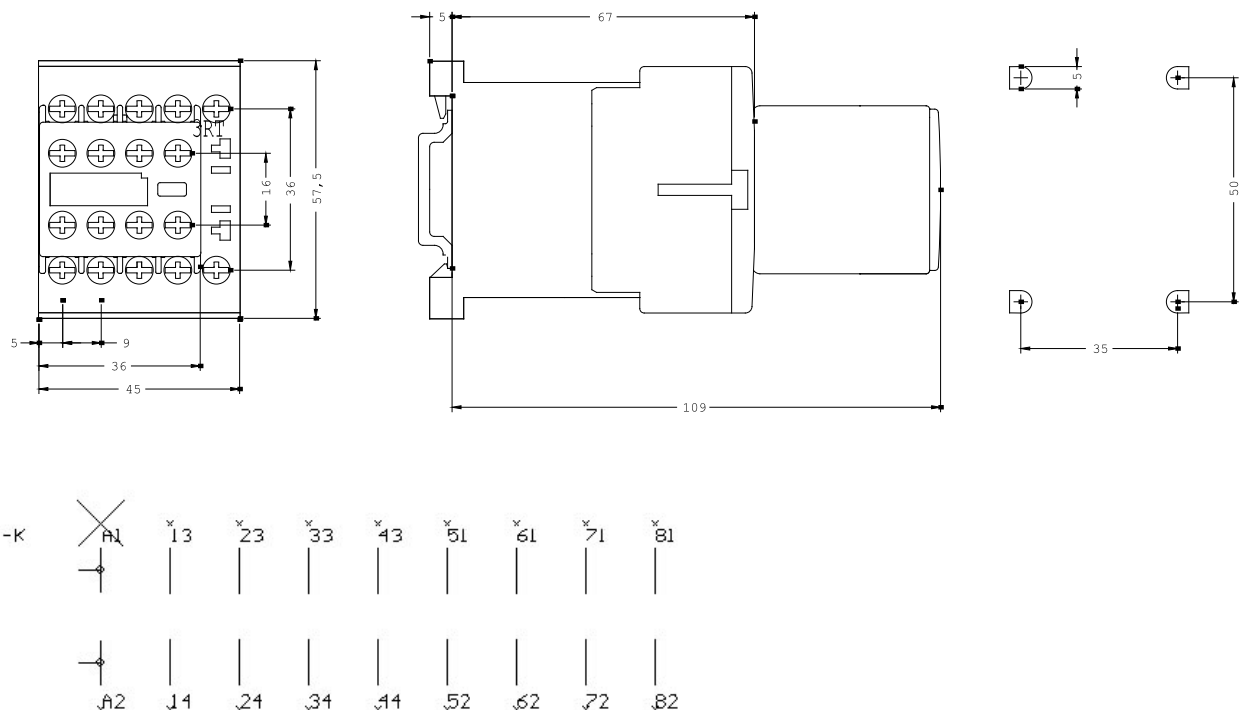

last change:

Jul 21, 2014