

CONTACTOR RELAY, 4NO + 4NC, 110 V AC,
50/60 HZ CAGE CLAMP CONNECTION, SIZE S00

General technical data:

product brand name		SIRIUS
Product designation		contactor relay
Size of the contactor		S00
Protection class IP / on the front		IP20
Degree of pollution		3
Insulation voltage / with degree of pollution 3 / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operating	°C	-25 ... +60
Contact reliability		one incorrect switching operation of 100 million switching operations (17 V, 1 mA)
Resistance against shock		10g / 5 ms and 5g / 10 ms
Impulse voltage resistance / rated value	kV	6
Reference code		
• according to DIN EN 61346-2		K
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		K
• according to DIN EN 81346-2		K
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000

Control circuit/ Control:

Voltage type / of control feed voltage		AC
Control supply voltage frequency		
• 1 / rated value	Hz	60
Control supply voltage		
• at 50 Hz / at AC / rated value	V	100
• at 60 Hz / at AC / rated value	V	110
Operating range factor control supply voltage rated value / of the magnet coil		
• at 60 Hz		

• for AC		0.85 ... 1.1
Apparent pull-in power / of the solenoid / for AC	V·A	27
Apparent holding power / of the solenoid / for AC	V·A	4.6
Inductive power factor		
• with the pull-in power of the coil		0.8
• with the pull-in power of the coil		0.27
Auxiliary circuit:		
Product extension / auxiliary switch		No
Identification number and letter for switching elements		44 E
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)
Number of NC contacts / for auxiliary contacts		4
• delayed switching		0
• instantaneous switching		4
• asynchronous switching		0
• lagging switching		0
Number of NO contacts / for auxiliary contacts		4
• instantaneous switching		4
• delayed switching		0
• asynchronous switching		0
• leading switching		0
Number of changeover contacts		
• for auxiliary contacts		0
• of the auxiliary contacts / instantaneous switching		0
Operating current		
• at AC-12 / maximum	A	10
• at AC-15		
• at 230 V / rated value	A	6
• at 400 V / rated value	A	3
• at 500 V / rated value	A	2
• at 690 V / rated value	A	1
Operating current / with 1 current path		
• at DC-12		
• at 24 V / rated value	A	10
• at 110 V / rated value	A	3
• at 220 V / rated value	A	1
• at DC-13		
• at 24 V / rated value	A	10
• at 110 V / rated value	A	1
• at 220 V / rated value	A	0.27

Short-circuit:		
Design of the fuse link / for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 10 A
Installation/ mounting/ dimensions:		
mounting position		+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Mounting type		screw and snap-on mounting
Width	mm	45
Height	mm	60
Depth	mm	114
Distance, to be maintained, to the ranks assembly / sideways	mm	0
Connections/ terminals:		
Design of the electrical connection / for auxiliary and control current circuit		Cage Clamp terminals
Type of the connectable conductor cross-section - for auxiliary contacts - solid - finely stranded - with conductor end processing - without conductor final cutting - for AWG conductors / for auxiliary contacts		2x (0.25 ... 2.5 mm²) 2x (0.25 ... 1.5 mm²) 2x (0.25 ... 2.5 mm²) 2x (24 ... 14)
Certificates/ approvals:		
Verification of suitability		CSA / UL / CCC / GL / LRS / BV / DNV / RMRS / RINA
General Product Approval		Functional Safety / Safety of Machinery Declaration of Conformity
 CCC  CSA  EAC  UL		Type Examination  EG-Konf.
Test Certificates		Shipping Approval
Special Test Certificate	Type Test Certificates/Test Report	 ABS  GL  RINA  RMRS
other		
other	Environmental Confirmations	
Safety related data:		
Proportion of dangerous failures		

• with high demand rate / according to SN 31920	%	75
• with low demand rate / according to SN 31920	%	40
Protection against electrical shock		finger-safe
T1 value / for proof test interval or service life / according to IEC 61508	a	20
B10 value / with high demand rate		1,000,000
• according to SN 31920		With 0.3 x Ie
• note		

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH1344-2AG10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1344-2AG10

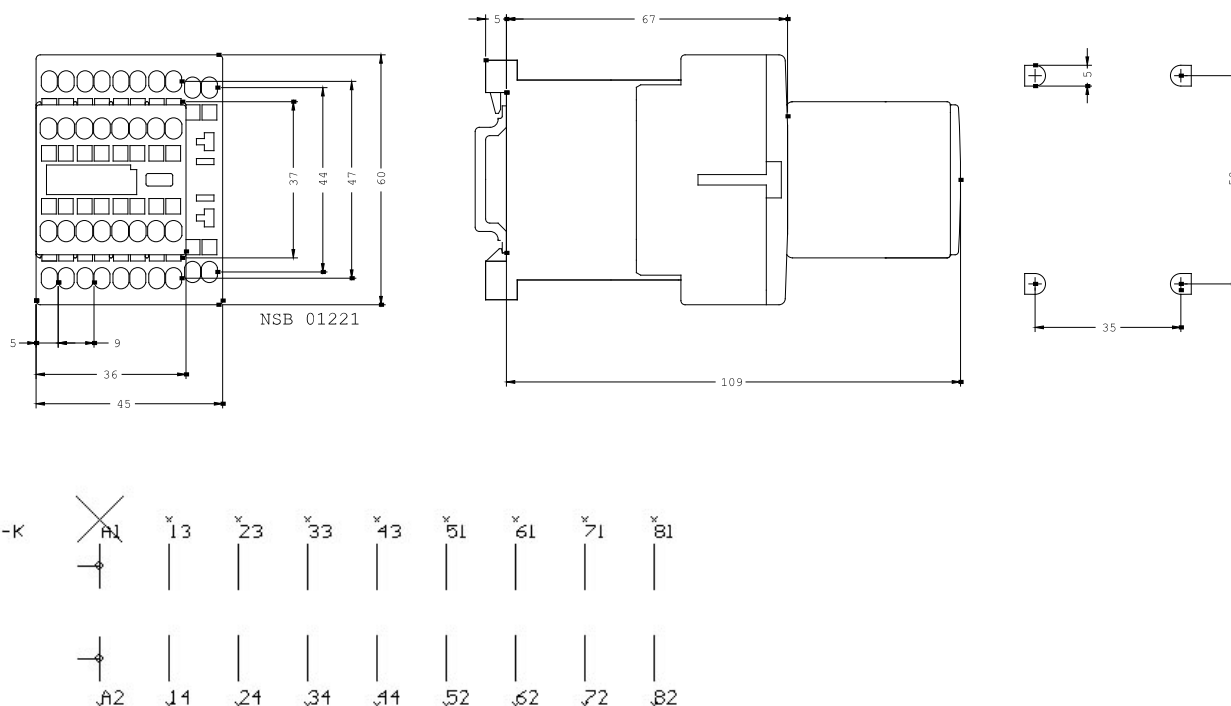

last change:

Jul 21, 2014