



CONTACTOR RELAY, 4NO, DC 230V,  
SIZE S00, SCREW TERMINAL

### General technical data:

|                                                               |    |                        |
|---------------------------------------------------------------|----|------------------------|
| product brand name                                            |    | SIRIUS                 |
| Size of the contactor                                         |    | S00                    |
| Identification number and letter for switching elements       |    | 40 E                   |
| Product extension / auxiliary switch                          |    | Yes                    |
| Protection class IP / on the front                            |    | IP20                   |
| Protection against electrical shock                           |    | finger-safe            |
| Degree of pollution                                           |    | 3                      |
| Insulation voltage / with degree of pollution 3 / rated value | V  | 690                    |
| Installation altitude / at a height over sea level / maximum  | m  | 2,000                  |
| Ambient temperature                                           |    |                        |
| • during storage                                              | °C | -55 ... +80            |
| • during operating                                            | °C | -25 ... +60            |
| Shock resistance                                              |    |                        |
| • at rectangular impulse                                      |    |                        |
| • at DC                                                       |    | 10g / 5 ms, 5g / 10 ms |
| • at sine pulse                                               |    |                        |
| • at DC                                                       |    | 15g / 5 ms, 8g / 10 ms |
| Impulse voltage resistance / rated value                      | kV | 6                      |
| Mechanical operating cycles as operating time                 |    |                        |

- of the contactor / typical
- of the contactor with added auxiliary switch block / typical
- of the contactor with added electronics-compatible auxiliary switch block / typical

30,000,000  
10,000,000  
5,000,000

#### Control circuit/ Control:

##### Voltage type / of control feed voltage

DC

##### Control supply voltage

- for DC / rated value

V

230

##### Operating range factor control supply voltage rated value / of the magnet coil

- for DC

0.8 ... 1.1

##### Holding power / of the solenoid / for DC

W

4

##### Pull-in power / of the solenoid / for DC

W

4

##### Closing delay

- at DC

ms

30 ... 100

##### Opening delay

- at DC

ms

25 ... 90

##### Arcing time

s

10 ... 15

#### Auxiliary circuit:

##### Contact reliability / of the auxiliary contacts

1 faulty switching per 100 million (17 V, 1 mA)

##### Number of NO contacts / for auxiliary contacts / instantaneous switching

4

##### Operating current

- at AC-12 / maximum
- at AC-15
  - at 230 V / rated value
  - at 400 V / rated value
  - at 500 V / rated value
  - at 690 V / rated value

A

10

A

10

A

3

A

2

A

1

##### Operating current

- with 1 current path / at DC-12
  - at 24 V / rated value
  - at 110 V / rated value
  - at 220 V / rated value
  - at 440 V / rated value
  - at 600 V / rated value
- with 2 current paths in series / at DC-12
  - at 24 V / rated value
  - at 60 V / rated value

A

10

A

3

A

1

A

0.3

A

0.15

A

10

A

10

|                                             |     |        |
|---------------------------------------------|-----|--------|
| • at 110 V / rated value                    | A   | 4      |
| • at 220 V / rated value                    | A   | 2      |
| • at 440 V / rated value                    | A   | 1.3    |
| • at 600 V / rated value                    | A   | 0.65   |
| • with 3 current paths in series / at DC-12 |     |        |
| • at 24 V / rated value                     | A   | 10     |
| • at 60 V / rated value                     | A   | 10     |
| • at 110 V / rated value                    | A   | 10     |
| • at 220 V / rated value                    | A   | 3.6    |
| • at 440 V / rated value                    | A   | 2.5    |
| • at 600 V / rated value                    | A   | 1.8    |
| <b>Operating current</b>                    |     |        |
| • with 1 current path / at DC-13            |     |        |
| • at 24 V / rated value                     | A   | 10     |
| • at 110 V / rated value                    | A   | 1      |
| • at 220 V / rated value                    | A   | 0.3    |
| • at 440 V / rated value                    | A   | 0.14   |
| • at 600 V / rated value                    | A   | 0.1    |
| • with 2 current paths in series / at DC-13 |     |        |
| • at 24 V / rated value                     | A   | 10     |
| • at 60 V / rated value                     | A   | 3.5    |
| • at 110 V / rated value                    | A   | 1.3    |
| • at 220 V / rated value                    | A   | 0.9    |
| • at 440 V / rated value                    | A   | 0.2    |
| • at 600 V / rated value                    | A   | 0.1    |
| • with 3 current paths in series / at DC-13 |     |        |
| • at 24 V / rated value                     | A   | 10     |
| • at 60 V / rated value                     | A   | 4.7    |
| • at 110 V / rated value                    | A   | 3      |
| • at 220 V / rated value                    | A   | 1.2    |
| • at 440 V / rated value                    | A   | 0.5    |
| • at 600 V / rated value                    | A   | 0.26   |
| <b>Off-load operating frequency</b>         |     |        |
| • at AC                                     | 1/h | 10,000 |
| • at DC                                     | 1/h | 10,000 |
| <b>Frequency of operation</b>               |     |        |
| • at AC-12 / maximum                        | 1/h | 1,000  |
| • at AC-14 / maximum                        | 1/h | 1,000  |
| • at AC-15 / maximum                        | 1/h | 1,000  |
| • at DC-12 / maximum                        | 1/h | 1,000  |

- at DC-13 / maximum

1/h

1,000

### Short-circuit:

#### Design of the fuse link / for short-circuit protection of the auxiliary switch

- required

fuse gL/gG: 10 A

#### Design of the miniature circuit breaker / for short-circuit protection of the auxiliary circuit / up to 230 V

C characteristic: 6 A; 0.4 kA

### Installation/ mounting/ dimensions:

#### mounting position

+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface

#### Mounting type

screw and snap-on mounting onto 35 mm standard mounting rail

#### Width

mm

45

#### Height

mm

57.5

#### Depth

mm

73

### Connections/ terminals:

#### Design of the electrical connection

- for auxiliary and control current circuit
- for auxiliary contacts / finely stranded / with conductor end processing
- for AWG conductors / for auxiliary contacts

screw-type terminals

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 2x 12

### Certificates/ approvals:

#### General Product Approval

#### Functional Safety / Safety of Machinery

#### Declaration of Conformity



CCC



CSA



UL

[Type Examination](#)


EG-Konf.

#### Test Certificates

[Special Test Certificate](#)
[Type Test Certificates/Test Report](#)

#### Shipping Approval



ABS


BUREAU  
VERITAS


DNV



GL



LRS



PRS

#### Shipping Approval

#### other



RINA



RMRS



VDE

[Environmental Confirmations](#)

## UL/CSA ratings:

Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

## Safety related data:

### B10 value / with high demand rate

- according to SN 31920
- note

1,000,000

With 0.3 x I<sub>e</sub>

### T1 value / for proof test interval or service life

- according to IEC 61508

a

20

### Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

40

%

73

### Failure rate [FIT] / with low demand rate

- according to SN 31920

FIT

100

### Product function / positively driven operation to IEC 60947-5-1

- comment

Yes

with 3RH29

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://mall.industry.siemens.com/>

### Cax online generator




<http://www.siemens.com/cax>


### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH2140-1BP40/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RH2140-1BP40](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH2140-1BP40)

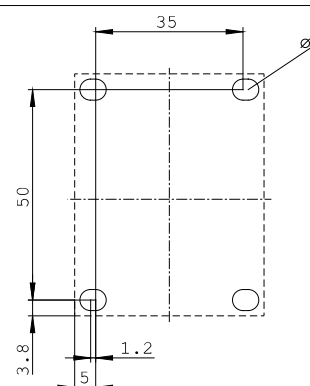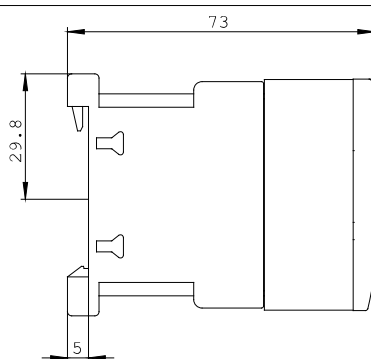

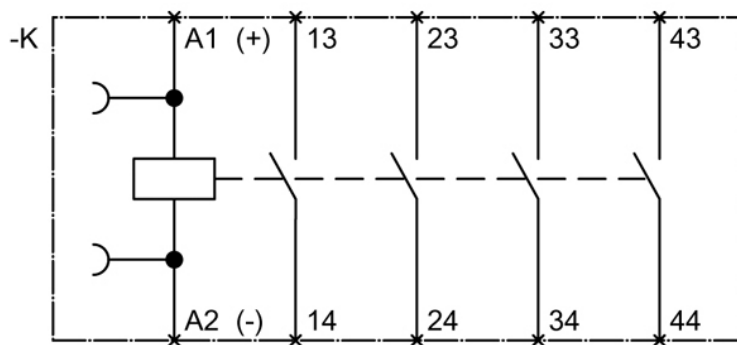

last change:

Aug 4, 2014